




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DATE	REVISIONS	DATE	BY	APPD
G	14				
		REVISED PER ECO-11-005027	11MAR11	RK	HMR

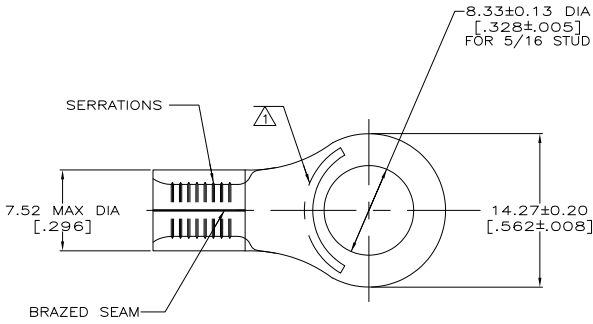

- ⚠ STAMP AMP 8* APPROX AS SHOWN
- ⚠ COPPER PER ASTM B-152, ANNEALED
- ⚠ NICKEL PLATE 0.00762 [.000300] MIN THK PER QQ-N-290

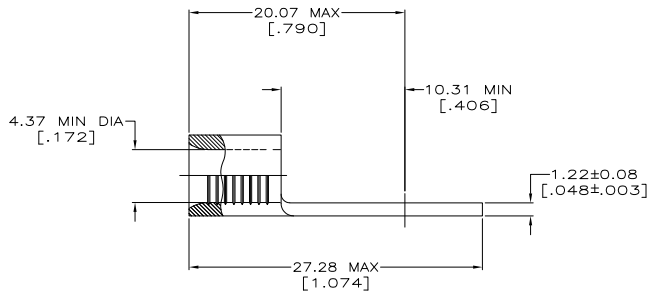

323167
PART NO.

MAX RECOMMENDED OPERATING TEMPERATURE: 34.3°C MAX	THIS DRAWING IS A CONTROLLED DOCUMENT.	BY TA BRINKMAN 4-19-93	
VOLTAGE RATING: N/A		CHK DA PATTERSON 4-19-93	
CIRCULAR MIL AREA: 8.64-10.5mm² [13,100-20,800] SOLID OR STRANDED	DIMENSIONS: mm[INCHES] TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PRC ± - 1 PRC ± - 2 PRC ± - 3 PRC ± - 4 PRC ± - ANGLES ± - MATERIAL: - ⚠ FINISH: - ⚠	APD JL MECKLEY 4-19-93 PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: - CUSTOMER DRAWING	TE Connectivity TERMINAL, RING TONGUE, HEAT RESISTANT, STRATO-THERM SIZE: A2 CAGE CODE: 00779 DRAWING NO: 323167 SCALE: 4:1 SHEET: 1 of 1 REV: C2