THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| G | 14 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | C1 | REVISED PER ECO-11-005027 | 12MAR11 | RK | HMR |

DAP




**METRIC**

DIMENSIONS LISTED IN mm [ INCHES ]

| AMP WIRE RANGE | E13288 Listed |
|---|---|
| 12-10 AWG SOLID OR STRANDED | 12-10 AWG STRANDED |
| LR7189 Certified | MILITARY P/N AND CLASS |
| 12-10 AWG SOLID OR STRANDED | NOT APPLICABLE |

1 STAMP AMP 12-10* APPROX AS SHOWN

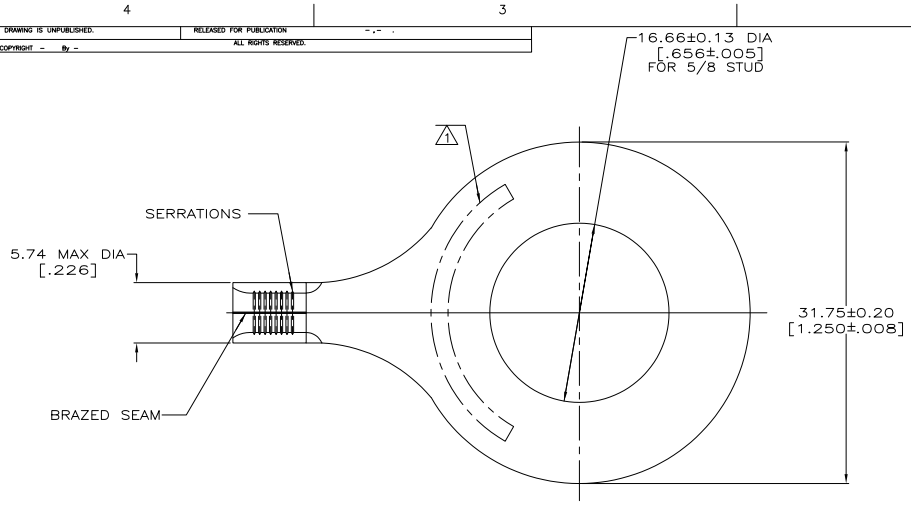


| AMP INCORPORATED CUSTOMER SERVICE SYSTEMS | | MAX RECOMMENDED OPERATING TEMPERATURE: 170° C MAX |
|---|---|---|
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS | PRODUCT INFORMATION CENTER 1-800-522-6752 | VOLTAGE RATING: NOT APPLICABLE |
| FOR APPLICATION TOOLING INFORMATION | TOOLING ASSISTANCE CENTER 1-800-722-1111 | WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm² [5,180-13,100] CIR MILS SOLID OR STRANDED |
| FOR ORDER ENTRY | 1-800-526-5142 | |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm[INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

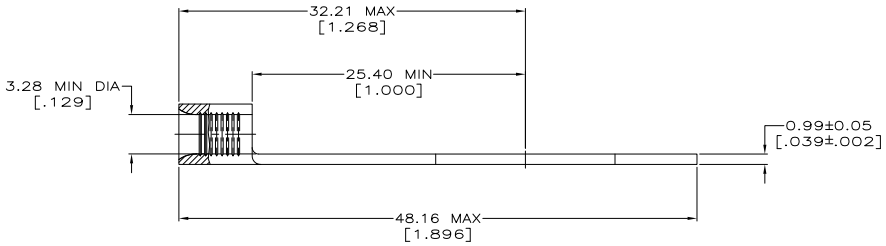MATERIAL COPPER PER ASTM B-152 ANNEALED

FINISH TIN PLATE 0.00254[.000100] MIN THK PER MIL-T-10727

DWN TA BRINKMAN 3-17-93
CHK DA PATTERSON 3-17-93
APVD DE MILLER 3-17-93
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME TERMINAL, RING TONGUE, SOLISTRAND™ —

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-320764 | — |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV C1

320764
PART NO

320764

1471-9 (3/11)

Downloaded from Elcodis.com electronic components distributor