
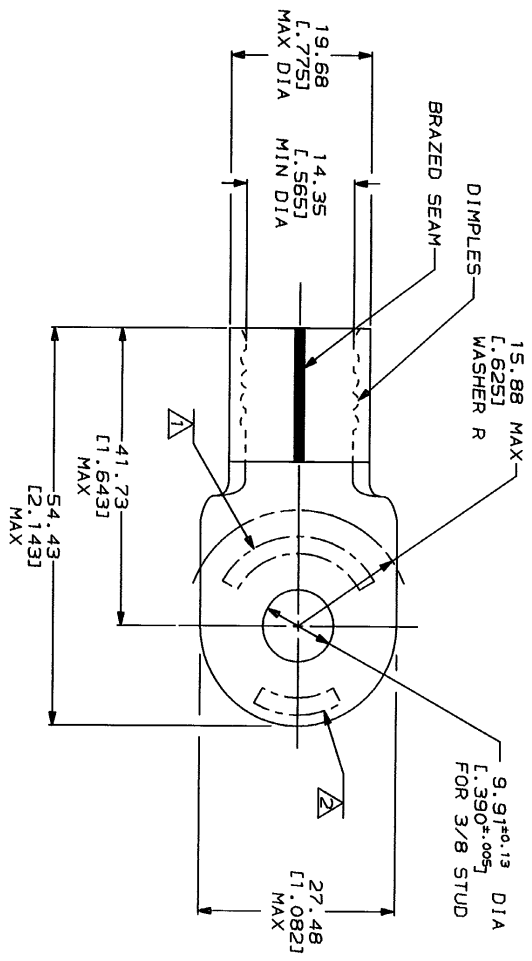


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.	
AMP PART NO	MATERIAL	PAGE TYPE	QTY
8-36927-3	M/F B-36927-0	BOX	25

LOC	DIST	ZONE	DESCRIPTION	DATE	APPD
6	14	E	REVISED & REPRAN PER 0720-0037-93	5/20/93	REN



AMP WIRE RANGE 3/0 AWG SOLID OR STRANDED	UL E13288 Listed 3/0 AWG SOLID OR STRANDED
LR7189 Certified 3/0 AWG SOLID OR STRANDED	MILITARY P/N AND CLASS NOT APPLICABLE

- △ STAMP AMP 3/0W* APPROX AS SHOWN
- △ STAMP 150 APPROX AS SHOWN
- 3 TONGUE MATERIAL THK: 2.31 ±0.08 L.091 ±.003]

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING TEMPERATURE:
170°C MAX

DO NOT SCALE PRINT.
DIMENSIONS LISTED IN INCHES—
TOLERANCES ON 1.
2 P.L.C. DEC ± 0.20(.008)
3 P.L.C. DEC ± .ANGLES
NOMINAL

DR E/20/93
DK SC/MH
CHK 1/27/94
RD M/14

APPD 1/27/94
RE ROSSER
JL HECKLEY
PRODUCT SPEC

NAME
AMP
AMP Incorporated
Harrisburg, PA 17105-3608

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
1-800-522-6752

VOLTAGE RATING:
NOT APPLICABLE

COPPER ASTM B-152
ANNEALED

FINISH
TIN PLATE
0.0025(41.000100) MIN
THK PER MIL-T-10727

APPD 1/27/94
RE ROSSER
JL HECKLEY
PRODUCT SPEC

TERMINAL, RING TONGUE,
SOLISTRAND™

FOR APPLICATION TOOLING INFORMATION
1-800-722-1111

CIRCULAR MIL AREA:
SOL ID OR STRANDED

APPLICATOR SPEC

WEIGHT

SIZE
CASE CODE
00779

DRAWING NO
36927