

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	J	REDRAWN PER 0720-0377-94	100CT94	LO ME

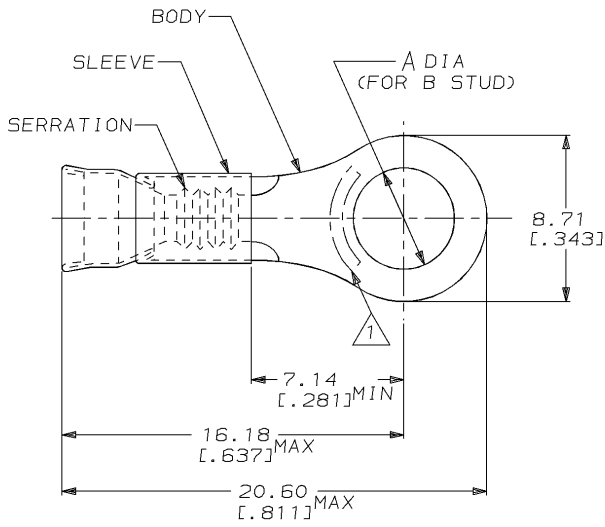

△ SEE TABLE FOR STAMPING

- 2. WIRE INSUL DIA, 3.05-4.32 [.120-.170]
- 3. TONGUE MATL THK, 0.79±0.05 [.031±.002]

AMP	WIRE DIA	WIRE THK	WIRE TYPE	SLV COLOR	QTY	PACKAGE TYPE	PART NO
AMP 16-14	4.34 ±0.08 [.171 ±.003]	#8	NICKEL PER ASTM B162	ORANGE	5000	ON TAPE, REEL	1-322337-2
AMP 16-14CH	5.00 ±0.08 [.197 ±.003]	#10	CHROMEL	GRAY	500	LOOSE PIECE	1-322337-1
AMP 16-14CH	4.34 ±0.08 [.171 ±.003]	#8	CHROMEL	GRAY	500	LOOSE PIECE	1-322337-0
AMP 16-14	4.34 ±0.08 [.171 ±.003]	#8	NICKEL PER ASTM B162	ORANGE	1000	LOOSE PIECE	322337

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 649°C [1200°F]		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN L OLMEDA 100CT94		AMP Incorporated Harrisburg, PA 17105-3608	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: -		DIMENSIONS: mm [in]		APVD M ELLIS 100CT94		NAME S BORTNER 100CT94	
FOR APPLICATION TOOLING INFORMATION TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 1.04mm² - 2.62mm² [2050-5180]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.20 (.008) 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC -		APPLICATION SPEC -	
FOR ORDER ENTRY 1-800-526-5142		STRANDED WIRE		MATERIAL BODY, SEE TABLE SLEEVE, NI SIL PER ASTM B122		FINISH SLV COLOR, SEE TABLE		WEIGHT -	
						SIZE A3		CAGE CODE 00779	
						DRAWING NO C-322337		SCALE 6:1	
						CUSTOMER DRAWING		SHEET 1 OF 1	
								REV J	

AMP 1470-19 REV 09MAY94

31 OCT 1994 14:59:12 AMP12360 <UJ128A>DEPT1132-U, DWG1132-U, RBY-U, DIAMOND-GRIP-U, STRATOTHERM-U, CUST