




- ▼ Simple Drive Requirement
- ▼ Low On-resistance
- ▼ Fast Switching Performance
- ▼ RoHS Compliant & Halogen-Free

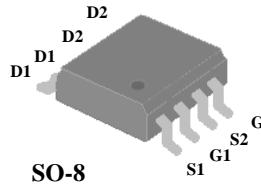


N-CH	BV_{DSS}	35V
	$R_{DS(ON)}$	36mΩ
	I_D	5.8A
P-CH	BV_{DSS}	-35V
	$R_{DS(ON)}$	68mΩ
	I_D	-4.3A

Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The SO-8 package is widely preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

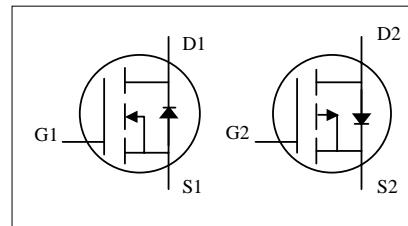

Absolute Maximum Ratings

Symbol	Parameter	Rating		Units
		N-channel	P-channel	
V_{DS}	Drain-Source Voltage	35	-35	V
V_{GS}	Gate-Source Voltage	+20	+20	V
$I_D @ T_A = 25^\circ C$	Continuous Drain Current ³	5.8	-4.3	A
$I_D @ T_A = 70^\circ C$	Continuous Drain Current ³	4.7	-3.4	A
I_{DM}	Pulsed Drain Current ¹	20	-20	A
$P_D @ T_A = 25^\circ C$	Total Power Dissipation	2		W
	Linear Derating Factor	0.016		W/°C
E_{AS}	Single Pulse Avalanche Energy ⁴	12.5	12.5	mJ
I_{AR}	Avalanche Current	5	-5	A
E_{AR}	Repetitive Avalanche Energy ¹	0.05	0.05	mJ
T_{STG}	Storage Temperature Range	-55 to 150		°C
T_J	Operating Junction Temperature Range	-55 to 150		°C

Thermal Data

Symbol	Parameter	Value	Unit
R_{thj-a}	Maximum Thermal Resistance, Junction-ambient ³	62.5	°C/W



AP4513GM-HF

N-CH Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	35	-	-	V
ΔBV _{DSS} /ΔT _j	Breakdown Voltage Temperature Coefficient	Reference to 25°C, I _D =1mA	-	0.03	-	V/°C
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V _{GS} =10V, I _D =5A	-	-	36	mΩ
		V _{GS} =4.5V, I _D =3A	-	-	60	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1	-	3	V
g _{fs}	Forward Transconductance	V _{DS} =10V, I _D =5A	-	7	-	S
I _{DSS}	Drain-Source Leakage Current	V _{DS} =30V, V _{GS} =0V	-	-	1	uA
	Drain-Source Leakage Current (T _j =70°C)	V _{DS} =24V, V _{GS} =0V	-	-	25	uA
I _{ess}	Gate-Source Leakage	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
Q _g	Total Gate Charge ²	I _D =5A	-	6	10	nC
Q _{gs}	Gate-Source Charge	V _{DS} =28V	-	2	-	nC
Q _{gd}	Gate-Drain ("Miller") Charge	V _{GS} =4.5V	-	3	-	nC
t _{d(on)}	Turn-on Delay Time ²	V _{DS} =15V	-	8	-	ns
t _r	Rise Time	I _D =1A	-	7	-	ns
t _{d(off)}	Turn-off Delay Time	R _G =3.3Ω, V _{GS} =10V	-	16	-	ns
t _f	Fall Time	R _D =15Ω	-	3	-	ns
C _{iss}	Input Capacitance	V _{GS} =0V	-	470	750	pF
C _{oss}	Output Capacitance	V _{DS} =25V	-	90	-	pF
C _{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	60	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V _{SD}	Forward On Voltage ²	I _S =1.7A, V _{GS} =0V	-	-	1.2	V
t _{rr}	Reverse Recovery Time ²	I _S =5A, V _{GS} =0V	-	17	-	ns
			-	11	-	nC



P-CH Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-35	-	-	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ\text{C}, I_{\text{D}}=-1\text{mA}$	-	-0.03	-	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-4\text{A}$	-	-	68	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-2\text{A}$	-	-	100	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=-250\mu\text{A}$	-1	-	-3	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=-10\text{V}, I_{\text{D}}=-4\text{A}$	-	6	-	S
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=-30\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-1	uA
	Drain-Source Leakage Current ($T_j=70^\circ\text{C}$)	$V_{\text{DS}}=-24\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-25	uA
I_{GSS}	Gate-Source Leakage	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Q_g	Total Gate Charge ²	$I_{\text{D}}=-4\text{A}$	-	6	10	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=-28\text{V}$	-	1	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=-4.5\text{V}$	-	4	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time ²	$V_{\text{DS}}=-15\text{V}$	-	8	-	ns
t_r	Rise Time	$I_{\text{D}}=-1\text{A}$	-	7	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_G=3.3\Omega, V_{\text{GS}}=-10\text{V}$	-	20	-	ns
t_f	Fall Time	$R_D=15\Omega$	-	4	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	410	660	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=-25\text{V}$	-	95	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	70	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ²	$I_{\text{S}}=-1.7\text{A}, V_{\text{GS}}=0\text{V}$	-	-	-1.2	V
t_{rr}	Reverse Recovery Time ²	$I_{\text{S}}=-4\text{A}, V_{\text{GS}}=0\text{V}$	-	21	-	ns
Q_{rr}	Reverse Recovery Charge	$dI/dt=-100\text{A}/\mu\text{s}$	-	16	-	nC

Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in² copper pad of FR4 board , t \leq 10sec ; $135^\circ\text{C}/\text{W}$ when mounted on min. copper pad.
- 4.Starting $T_j=25^\circ\text{C}$, $V_{\text{DD}}=25\text{V}$, $L=1\text{mH}$, $R_G=25\Omega$

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.



AP4513GM

N-Channel

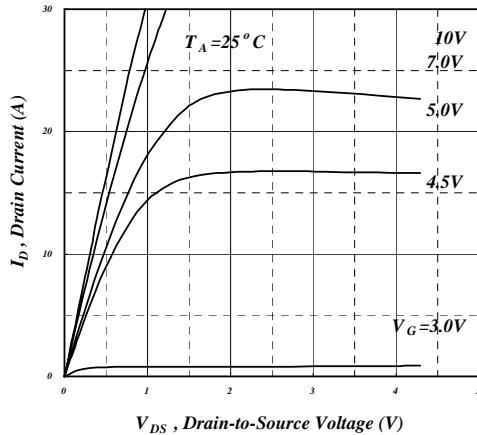


Fig 1. Typical Output Characteristics

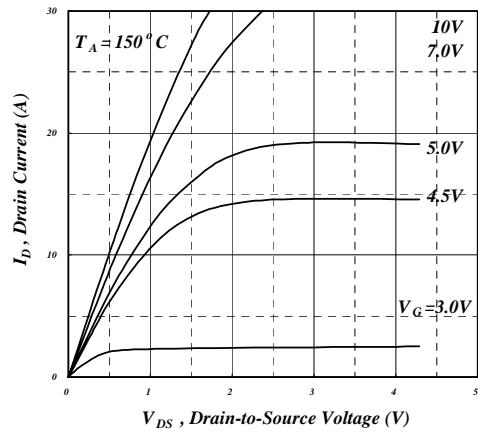


Fig 2. Typical Output Characteristics

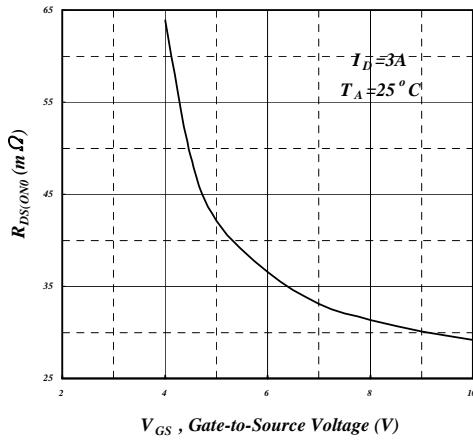


Fig 3. On-Resistance v.s. Gate Voltage

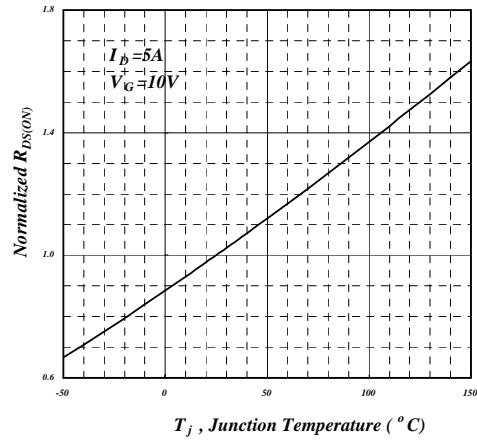


Fig 4. Normalized On-Resistance v.s. Junction Temperature

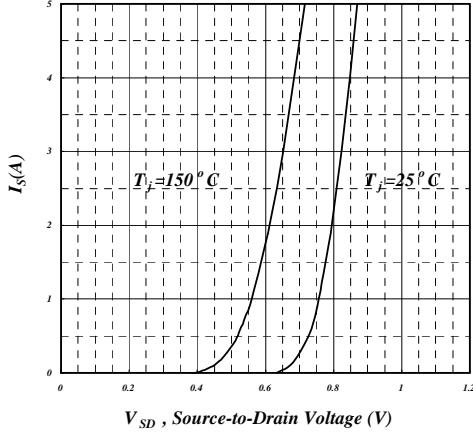


Fig 5. Forward Characteristic of Reverse Diode

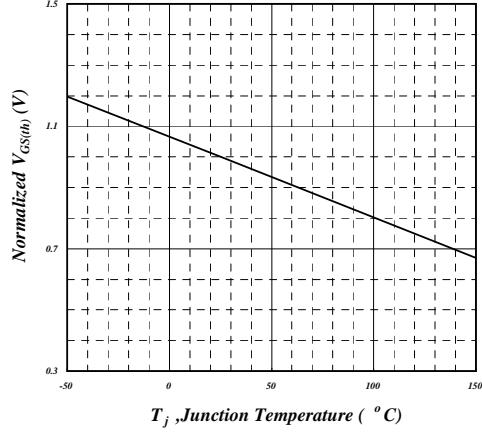


Fig 6. Gate Threshold Voltage v.s. Junction Temperature



N-Channel

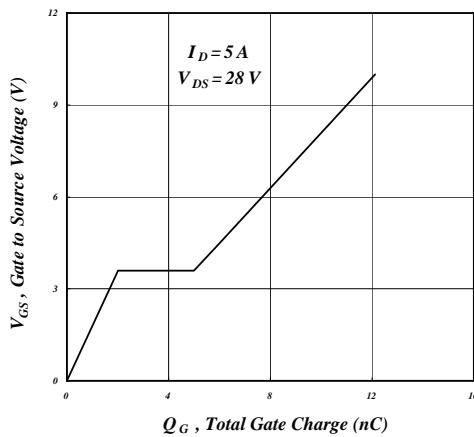


Fig 7. Gate Charge Characteristics

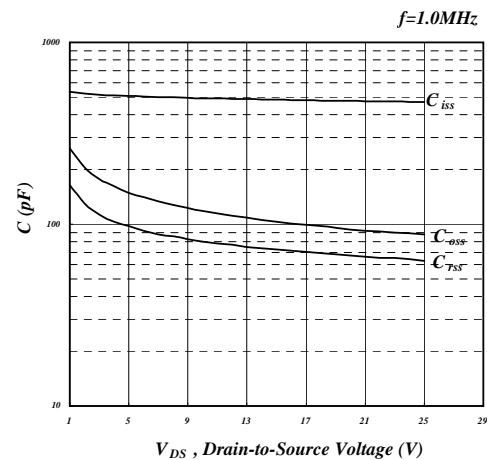


Fig 8. Typical Capacitance Characteristics

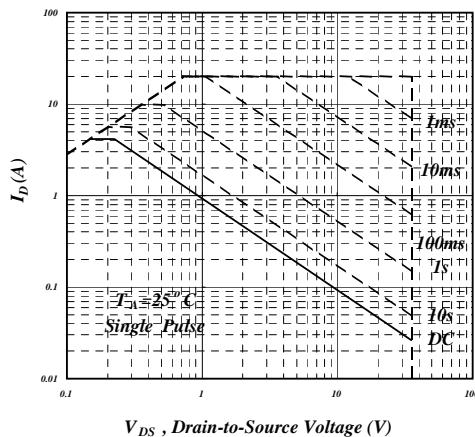


Fig 9. Maximum Safe Operating Area

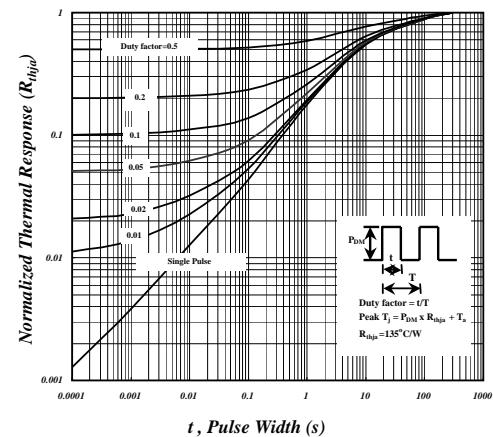


Fig 10. Effective Transient Thermal Impedance

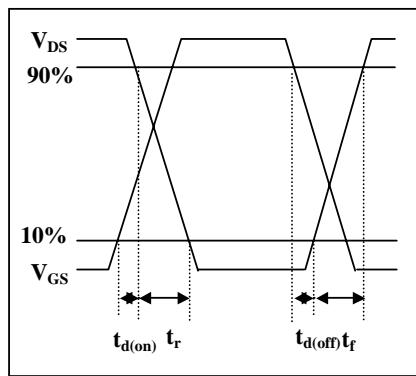


Fig 11. Switching Time Waveform

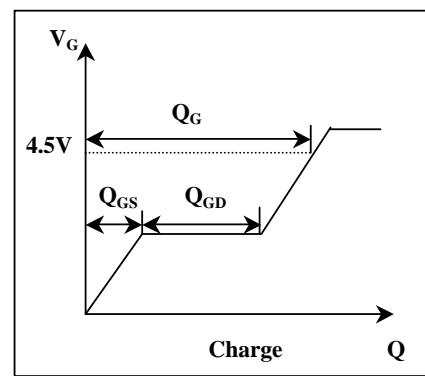


Fig 12. Gate Charge Waveform



AP4513GM-HF

P-Channel

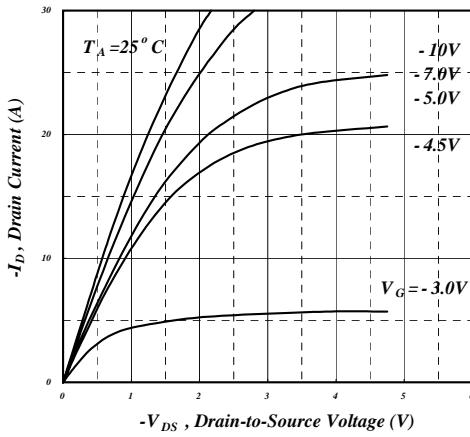


Fig 1. Typical Output Characteristics

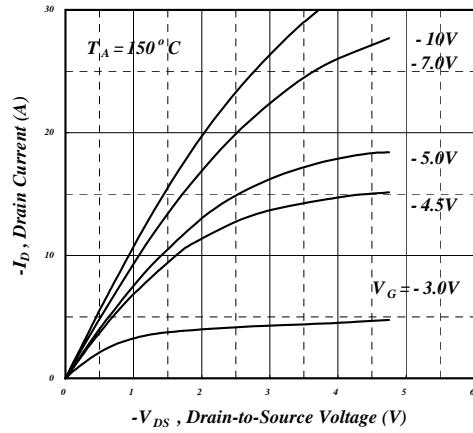


Fig 2. Typical Output Characteristics

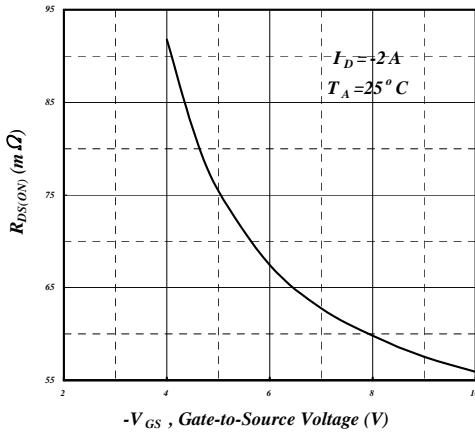


Fig 3. On-Resistance v.s. Gate Voltage

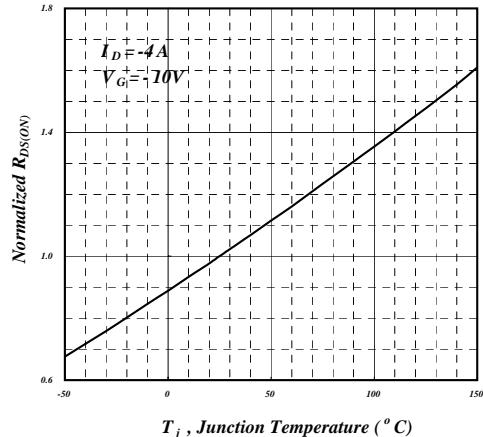


Fig 4. Normalized On-Resistance v.s. Junction Temperature

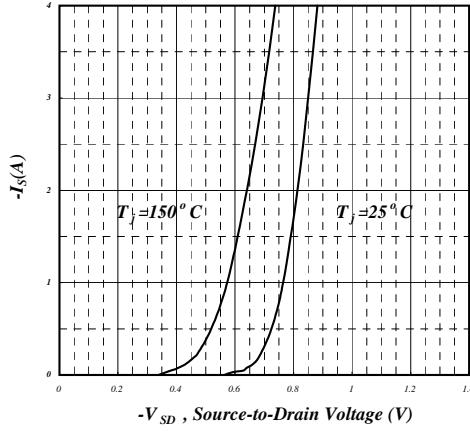


Fig 5. Forward Characteristic of Reverse Diode

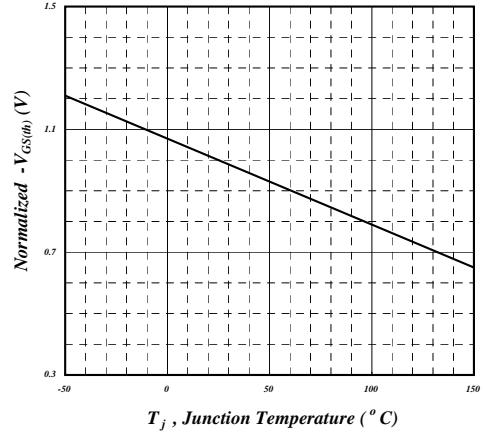


Fig 6. Gate Threshold Voltage v.s. Junction Temperature



P-Channel

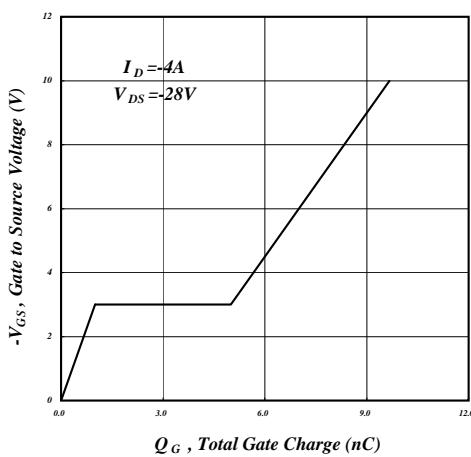


Fig 7. Gate Charge Characteristics

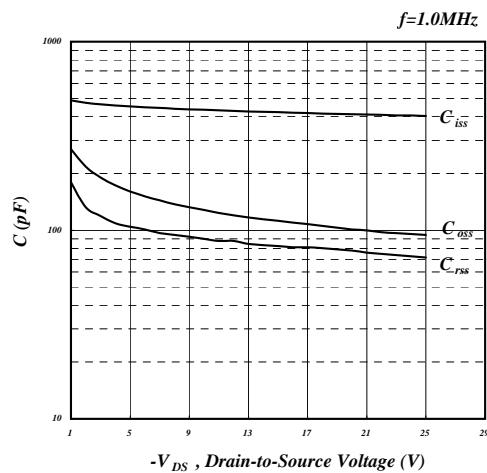


Fig 8. Typical Capacitance Characteristics

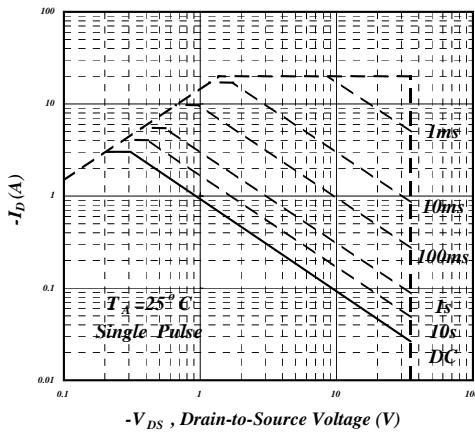


Fig 9. Maximum Safe Operating Area

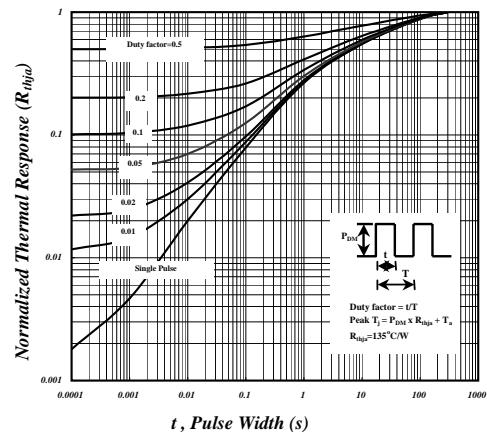


Fig 10. Effective Transient Thermal Impedance

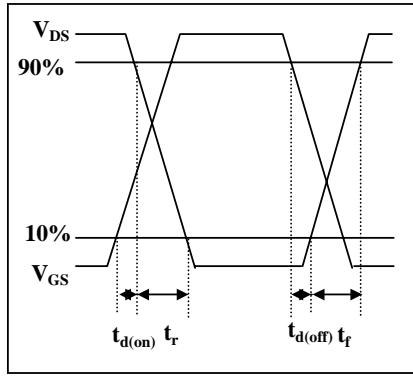


Fig 11. Switching Time Waveform

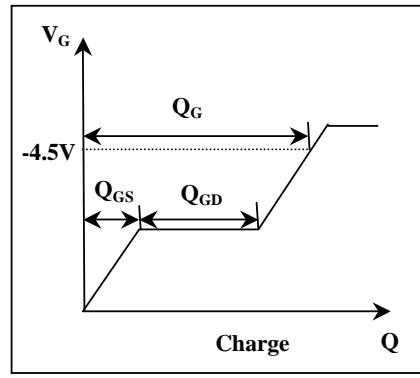


Fig 12. Gate Charge Waveform