
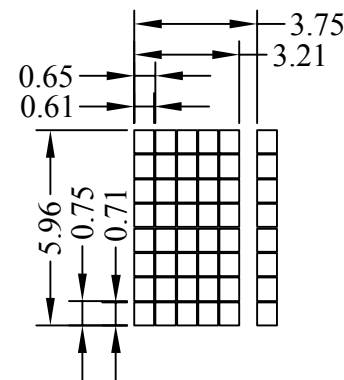
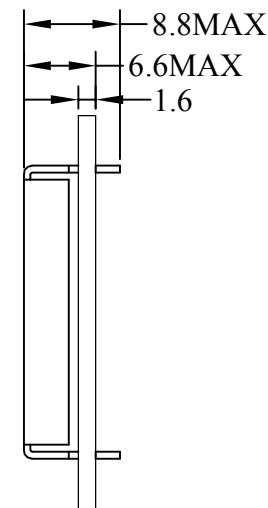


↑
VIEWING DIRECTION



PIN	CONNECTION
1	VSS
2	VDD
3	VO
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	NC
16	NC

Specification:

- 1). Driving: Duty: 1/16, Bias:1/5, VLCD:4.5, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Yellow-Green/Positive/Transflective
- 4). Operating temp.: -0°C~+50°C
Storage temp.: -20°C~+70°C
- 5). IC: S6A0069(or equivalence)

TS DISPLAY			
Dwg Title		TSM1601A	
Dwg No.		Date 2007-10-25	
Scale	Unit mm	Tol. ± 0.2	⊕
Drawn DOU	Checked	Approved	