


# TSG12832A Series

## Display Feature

Item	Value
Structure	COG
LCD Display Mode	FSTN, Positive, Transflective
Viewing Angle	6H
Driving Method	1/33 duty, 1/6 bias
Backlight	Nil
Control/Driver IC	ST7565

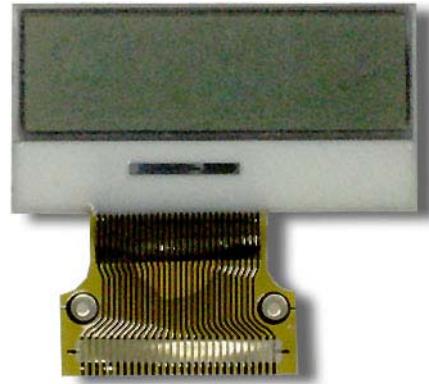

## Mechanical Data

Item	Value
Outline	34.5 x 17.9 x 2.0Max.
Viewing Area	32.0 x 10.1
Active Area	29.666 x 8.45
Dot Pitch	0.232 x 0.265
Dot Size	0.202 x 0.235

## Absolute Maximum

Item	MIN.	MAX.
Operating Voltage(V)	0	3.3
Operating Temperature(°C)	-10	+60
Storage Temperature(°C)	-20	+70

## Electrical Characteristics

Item	Symbol	MIN.	TYP.	MAX
Operating Voltage(V)	VDD	2.7	3.0	3.3
Input High Voltage(V)	VIH	0.8V <sub>DD</sub>	-	VDD
Input Low Voltage(V)	VIL	Vss	-	0.2V <sub>DD</sub>
Operating Current(mA)	IDD	-	-	4.0
Forward Voltage(V)	Vf BL	-	-	-
Forward Current(mA)	If BL	-	-	-

## Terminal Function

No.	Pin Name	Descriptions	No.	Pin Name	Descriptions
1	VDD	Positive Power Supply	14	Vout	Voltage converter input/output
2	C86	80/68 Interface selection	15	VSS	Power supply ( GND )
3	VSS	Power Supply ( GND )	16~23	DB7~DB0	Data Bus lines
4~8	V5~V1	LCD driver supply voltage	24	E	Enable clock
9	C2+	Capacitor positive connection	25	R/W	Read/write signal
10	C2-	Capacitor negative connection	26	A0	Register selection
11	C1+	Capacitor positive connection	27	/RES	Reset signal
12	C1-	Capacitor negative connection	28	/CS1	Chip enable
13	C3+	Capacitor positive connection	-	-	-

## Outline Drawing

