


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
G	14	P	LTR	DESCRIPTION	DATE	DWN	APVD
		F4		REVISED PER ECO-11-004917	11MAR11	RK	HMR

AMP WIRE RANGE	E13288 Listed
1/0 AWG SOLID OR STRANDED	1/0 AWG SOLID OR STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
1/0 AWG SOLID OR STRANDED	

- TIN PL 0.00254[.000100] MIN THK PER ASTM B-545
- NICKEL PLATE 0.00762 [.000300] MIN EXT. THK PER QQ-N-290
- MS20659-151 CLASS 2

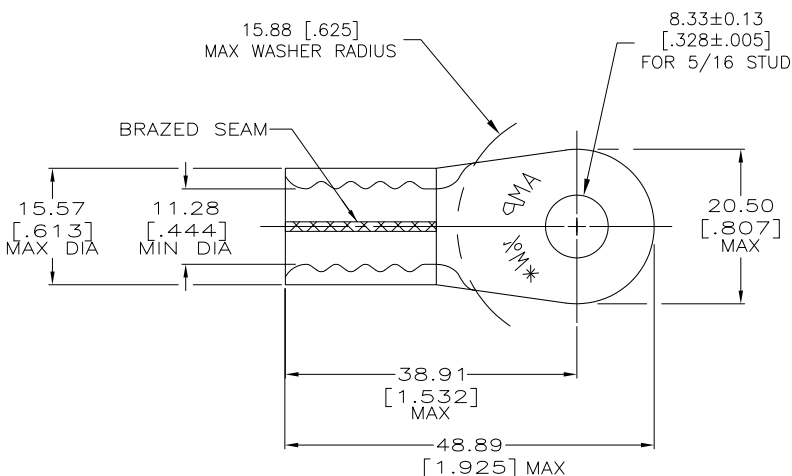

170°C	25	SMALL		COPPER ASTM B-152 1.78 ±0.08 [.070 ±.003] ANNEALED	8-321867-3
343°C	50	STANDARD			321867-2
170°C	50	STANDARD			321867
MAX TEMP RATING	QTY	PACKAGE TYPE	FINISH	MATERIAL	PART NO.
MAX RECOMMENDED OPERATING TEMPERATURE: SEE TABLE	THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN DK SCHRUM 8/30/91 CHK RD HEIM 9/30/91	STE TE Connectivity
VOLTAGE RATING: N/A	DIMENSIONS: mm[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20[.008] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD AJ KAUFMAN 9/30/91 PRODUCT SPEC APPLICATION SPEC	
CIRCULAR MIL AREA: 42.4-60.6mm² [83,700-118,500]	MATERIAL SEE TABLE	FINISH SEE TABLE		WEIGHT -	SIZE CAGE CODE DRAWING NO RESTRICTED TO A3 00779 C=321867 -
CUSTOMER DRAWING				SCALE 2:1	SHEET 1 of 1 REV F4