

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	D	REDRAWN PER 0720-0377-94	250CT94	LO ME

△ STAMP AMP 16-14 APPROX AS SHOWN

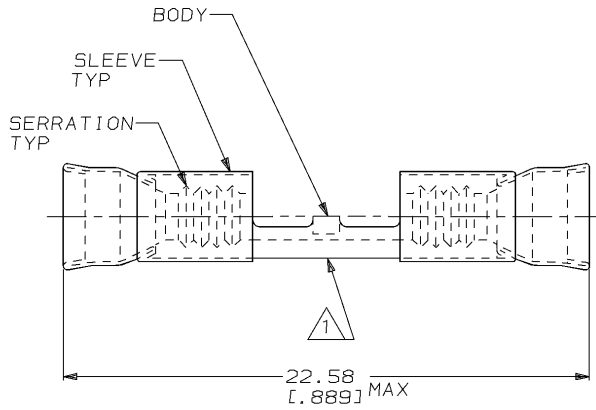

- 2. WIRE INSUL DIA, 3.05-4.32 [0.120-.170]
- 3. TONGUE MATL THK, 0.79±0.05 [0.031±.002]

CHROMEL	GRAY	500	LOOSE PIECE	1-322346-1
ALUMEL	GREEN	500	LOOSE PIECE	1-322346-0
NICKEL PER ASTM B162	ORANGE	1000	LOOSE PIECE	322346
BODY MATERIAL	SLV COLOR	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 649°C [1200°F]
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 1.04mm <sup>2</sup> -2.62mm <sup>2</sup> [2050-5180]
FOR ORDER ENTRY	1-800-526-5142	STRANDED WIRE

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN L OLMEDA 250CT94
DIMENSIONS: mm [in]		CHK M ELLIS 250CT94
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.20 [0.008] 3 PLC ±- 4 PLC ±- ANGLES ±-		APVD S BORTNER 250CT94
MATERIAL BODY, SEE TABLE SLEEVE, NI SIL PER ASTM B122		FINISH SLV COLOR, SEE TABLE

AMP Incorporated Harrisburg, PA 17105-3608		
NAME WIRE SPLICE, STRATOTHERM DIAMOND GRIP, WIRE SIZE, 16-14 AWG		
SIZE A3	CAGE CODE 00779	DRAWING NO C-322346
CUSTOMER DRAWING		
SCALE 6:1	SHEET 1 OF 1	REV D

AMP 1470-19 REV 09MAY94  
 01 NOV 1994 11:01:51 AMP12360 <UJ128A>DEPT1132-U, DWG1132-U, RBY-U, DIAMOND-GRIP-U, STRATOTHERM-U, CUST-U, SPLICE