

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	F	REDRAWN PER 0720-0377-94	250CT94	LO ME

△ STAMP AMP 16-14\* APPROX AS SHOWN

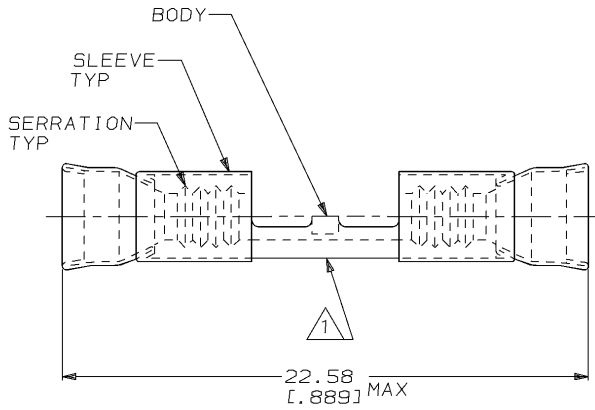

- 2. WIRE INSUL DIA, 3.05-4.32 [0.120-.170]
- 3. TONGUE MATL THK, 0.79±0.05 [0.031±.002]

1000	LOOSE PIECE	322825
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 343°C [650°F]	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN L OLMEDA 250CT94	AMP AMP Incorporated Harrisburg, PA 17105-3608
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -	DIMENSIONS: mm [in]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.20 (0.008) 3 PLC ±- 4 PLC ±- ANGLES ±-	CHK M ELLIS 250CT94	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 1.04mm²-2.62mm² [2050-5180]	MATERIAL BODY, CU PER ASTM B152 SLEEVE, NI SIL PER ASTM B122	FINISH BODY, NP, QQ-N-290	APVD S BORTNER 250CT94	PRODUCT SPEC -
FOR ORDER ENTRY	1-800-526-5142	STRANDED WIRE			APPLICATION SPEC -	WIRE SPLICE, STRATOTHERM DIAMOND GRIP, WIRE SIZE, 16-14 AWG
					WEIGHT -	SIZE A3
					CUSTOMER DRAWING	CAGE CODE 00779
						DRAWING NO C-322825
						SCALE 6:1
						SHEET 1 OF 1
						REV F

AMP 1470-19 REV 09MAY94

01 NOV 1994 11:04:06 AMP12360 <UJ128A>DEPT1132-U, DWG1132-U, RBY-U, DIAMOND-GRIP-U, STRATOTHERM-U, CUST-U, SPLICE