


SKiIP 15AC065V1

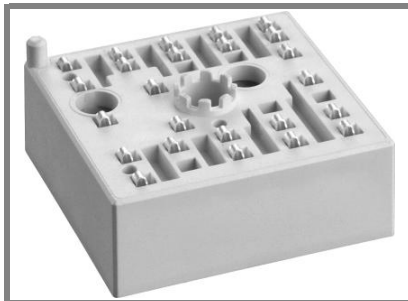

MiniSKiIP[®] 1

3-phase bridge inverter

SKiIP 15AC065V1

Features

- Ultrafast NPT IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

Typical Applications*


- Inverter up to 10,0 kVA
- Typical motor power 4,0 kW

Remarks

- V_{CEsat} , V_F = chip level value

| Absolute Maximum Ratings | | $T_s = 25^\circ\text{C}$, unless otherwise specified | |
|--------------------------|------------------------------------|---|------------------|
| Symbol | Conditions | Values | Units |
| IGBT - Inverter | | | |
| V_{CES} | | 600 | V |
| I_C | $T_s = 25 (70)^\circ\text{C}$ | 38 (28) | A |
| I_{CRM} | $t_p \leq 1 \text{ ms}$ | 60 | A |
| V_{GES} | | ± 20 | V |
| T_j | | - 40 ... + 150 | $^\circ\text{C}$ |
| Diode - Inverter | | | |
| I_F | $T_s = 25 (70)^\circ\text{C}$ | 40 (30) | A |
| I_{FRM} | $t_p \leq 1 \text{ ms}$ | 60 | A |
| T_j | | - 40 ... + 150 | $^\circ\text{C}$ |
| I_{RMS} | per power terminal (20 A / spring) | 40 | A |
| T_{stg} | $T_{op} \leq T_{stg}$ | - 40 ... + 125 | $^\circ\text{C}$ |
| V_{isol} | AC, 1 min. | 2500 | V |

| Characteristics | | $T_s = 25^\circ\text{C}$, unless otherwise specified | | | |
|---------------------------|--|---|------------|-----------|---------------|
| Symbol | Conditions | min. | typ. | max. | Units |
| IGBT - Inverter | | | | | |
| V_{CEsat} | $I_{Cnom} = 30 \text{ A}$, $T_j = 25 (125)^\circ\text{C}$ | | 2 (2,2) | 2,5 (2,7) | V |
| $V_{GE(th)}$ | $V_{GE} = V_{CE}$, $I_C = 0,5 \text{ mA}$ | 3 | 4 | 5 | V |
| $V_{CE(TO)}$ | $T_j = 25 (125)^\circ\text{C}$ | | 1,2 (1,1) | 1,3 (1,2) | V |
| r_T | $T_j = 25 (125)^\circ\text{C}$ | | 27 (37) | 40 (50) | m Ω |
| C_{ies} | $V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$ | | 1,5 | | nF |
| C_{oes} | $V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$ | | 0,2 | | nF |
| C_{res} | $V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$ | | 0,1 | | nF |
| $R_{th(j-s)}$ | per IGBT | | 1,05 | | K/W |
| $t_{d(on)}$ | under following conditions | | 20 | | ns |
| t_r | $V_{CC} = 300 \text{ V}$, $V_{GE} = \pm 15 \text{ V}$ | | 15 | | ns |
| $t_{d(off)}$ | $I_{Cnom} = 30 \text{ A}$, $T_j = 125^\circ\text{C}$ | | 185 | | ns |
| t_f | $R_{Gon} = R_{Goff} = 20 \Omega$ | | 10 | | ns |
| E_{on} | inductive load | | 1 | | mJ |
| E_{off} | | | 0,5 | | mJ |
| Diode - Inverter | | | | | |
| $V_F = V_{EC}$ | $I_{Fnom} = 30 \text{ A}$, $T_j = 25 (125)^\circ\text{C}$ | | 1,5 (1,5) | 1,8 (1,8) | V |
| $V_{(TO)}$ | $T_j = 25 (125)^\circ\text{C}$ | | 1 (0,9) | 1,1 (1) | V |
| r_T | $T_j = 25 (125)^\circ\text{C}$ | | 18 (20) | 23 (27) | m Ω |
| $R_{th(j-s)}$ | per diode | | 1,5 | | K/W |
| I_{RRM} | under following conditions | | 58 | | A |
| Q_{rr} | $I_{Fnom} = 30 \text{ A}$, $V_R = 300 \text{ V}$ | | 3,5 | | μC |
| E_{rr} | $V_{GE} = 0 \text{ V}$, $T_j = 125^\circ\text{C}$ $di_F/dt = 2500 \text{ A}/\mu\text{s}$ | | 0,8 | | mJ |
| Temperature Sensor | | | | | |
| R_{ts} | 3 %, $T_r = 25 (100)^\circ\text{C}$ | | 1000(1670) | | Ω |
| Mechanical Data | | | | | |
| m | | | 35 | | g |
| M_s | Mounting torque | 2 | | 2,5 | Nm |

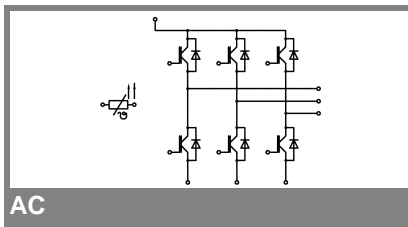

AC

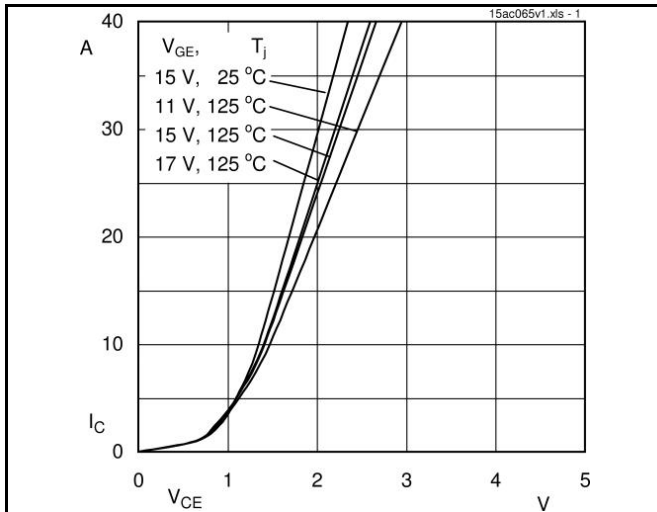


Fig. 1 Output characteristic

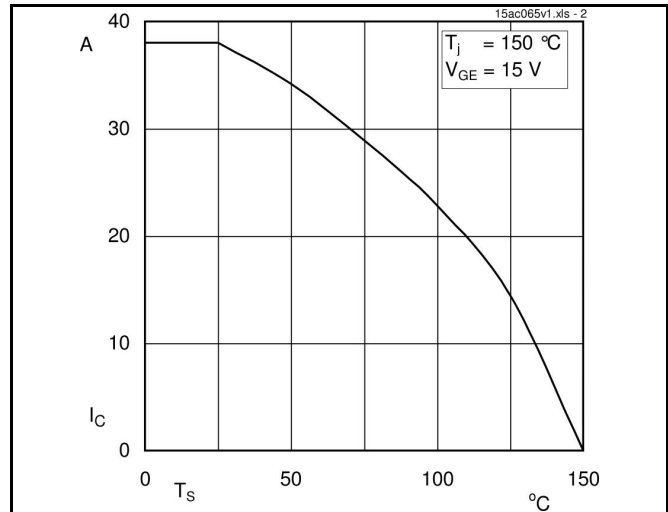


Fig. 2 Rated current vs. temperature

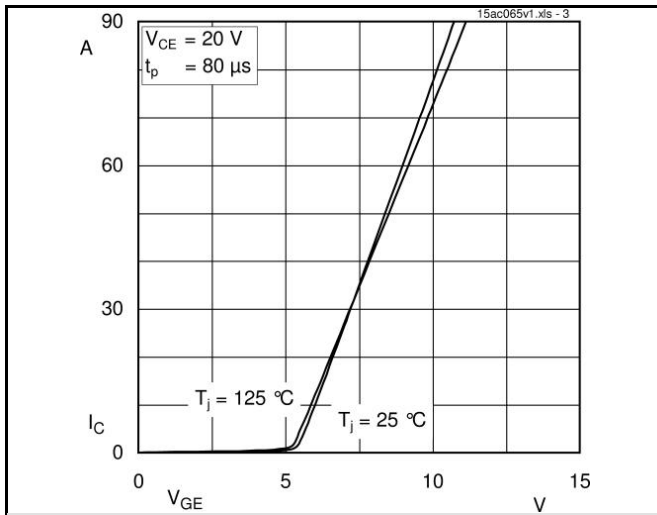


Fig. 3 Typ. transfer characteristic

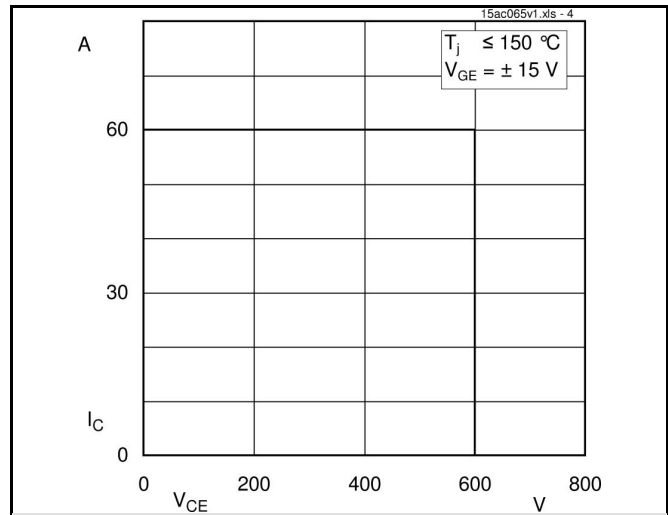


Fig. 4 Reverse bias safe operating area

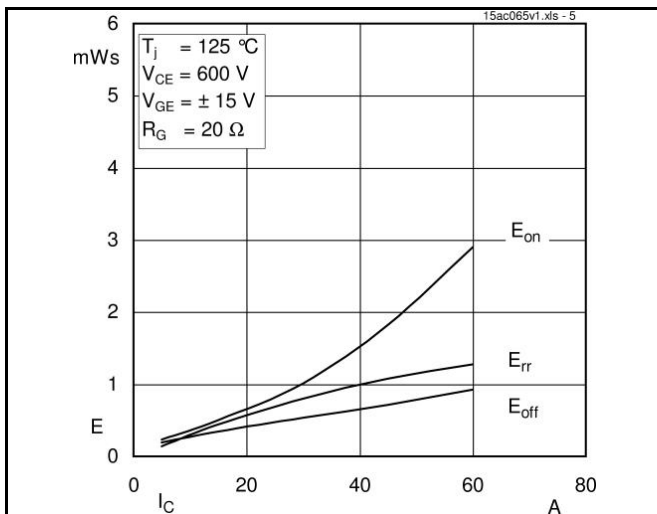


Fig. 5 Typ. Turn-on /-off energy = $f(I_C)$

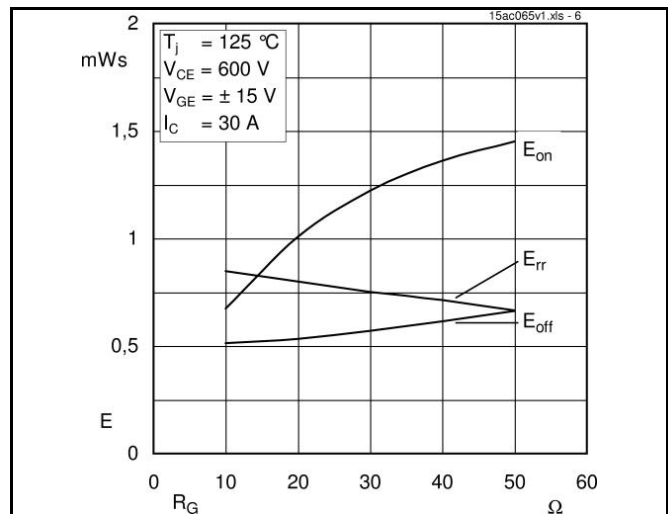


Fig. 6 Typ. Turn-on /-off energy = $f(R_G)$

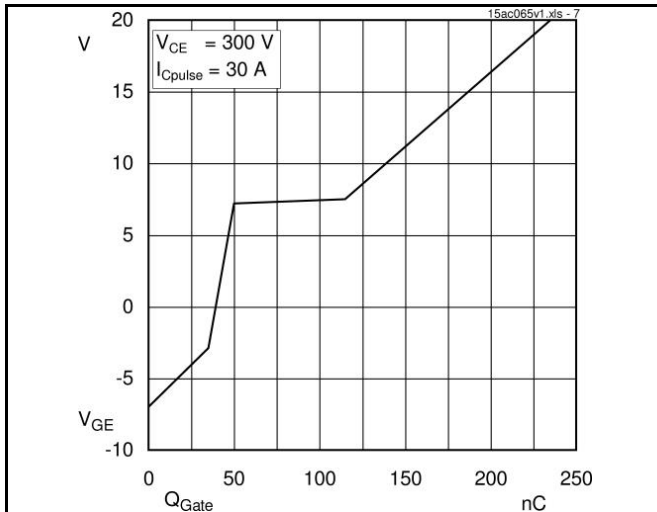


Fig. 7 Typ. gate charge characteristic

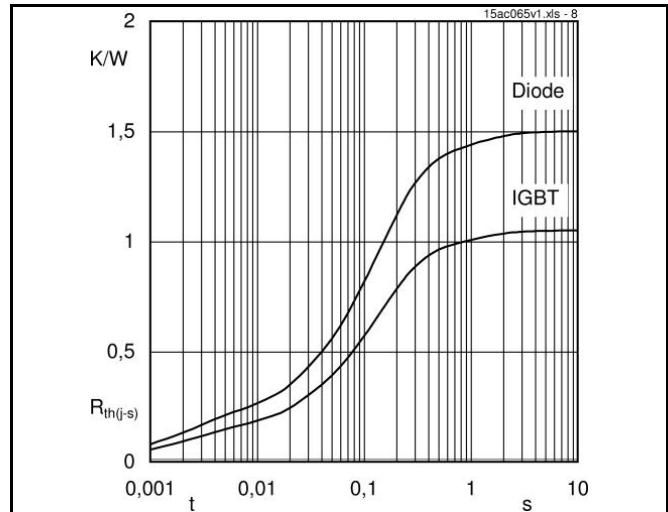


Fig. 8 Typ. thermal impedance

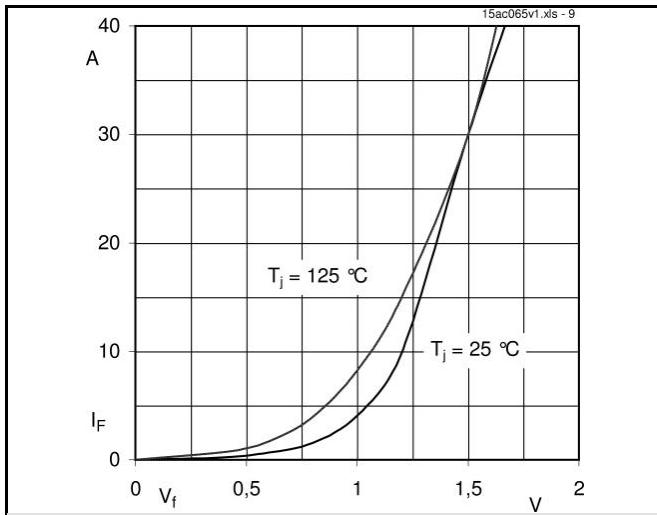


Fig. 9 Typ. freewheeling diode forward characteristic

