

SEMiX252GB176HDs



SEMiX[®] 2s

Trench IGBT Modules


SEMiX252GB176HDs

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- UL recognised file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

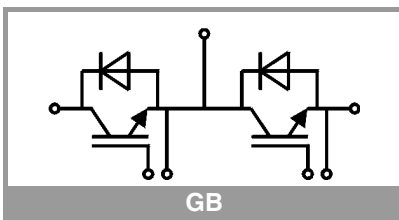

Absolute Maximum Ratings			
Symbol	Conditions	Values	Unit
IGBT			
V_{CES}	$T_j = 25\text{ °C}$	1700	V
I_C	$T_j = 150\text{ °C}$	$T_c = 25\text{ °C}$	246
		$T_c = 80\text{ °C}$	175
I_{Cnom}		150	A
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$	300	A
V_{GES}		-20 ... 20	V
t_{psc}	$V_{CC} = 1000\text{ V}$ $V_{GE} \leq 20\text{ V}$ $V_{CES} \leq 1700\text{ V}$	$T_j = 125\text{ °C}$	10
			μs
T_j		-55 ... 150	$^{\circ}\text{C}$
Inverse diode			
I_F	$T_j = 150\text{ °C}$	$T_c = 25\text{ °C}$	288
		$T_c = 80\text{ °C}$	195
I_{Fnom}		150	A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	300	A
I_{FSM}	$t_p = 10\text{ ms, sin } 180^{\circ}, T_j = 25\text{ °C}$	1200	A
T_j		-40 ... 150	$^{\circ}\text{C}$
Module			
$I_{t(RMS)}$	$T_{terminal} = 80\text{ °C}$	600	A
T_{stg}		-40 ... 125	$^{\circ}\text{C}$
V_{isol}	AC sinus 50Hz, $t = 1\text{ min}$	4000	V

Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
IGBT					
$V_{CE(sat)}$	$I_C = 150\text{ A}$ $V_{GE} = 15\text{ V}$ chipllevel	$T_j = 25\text{ °C}$	2	2.45	V
		$T_j = 125\text{ °C}$	2.4	2.9	V
V_{CE0}		$T_j = 25\text{ °C}$	1	1.2	V
		$T_j = 125\text{ °C}$	0.9	1.1	V
r_{CE}	$V_{GE} = 15\text{ V}$	$T_j = 25\text{ °C}$	6.7	8.3	$\text{m}\Omega$
		$T_j = 125\text{ °C}$	10.3	12.0	$\text{m}\Omega$
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 6\text{ mA}$	5.2	5.8	6.4	V
I_{CES}	$V_{GE} = 0\text{ V}$ $V_{CE} = 1700\text{ V}$	$T_j = 25\text{ °C}$		3	mA
		$T_j = 125\text{ °C}$			mA
C_{ies}	$V_{CE} = 25\text{ V}$		13.3		nF
C_{oes}	$V_{GE} = 0\text{ V}$		0.55		nF
C_{res}			0.44		nF
Q_G	$V_{GE} = -8\text{ V...} + 15\text{ V}$		1400		nC
R_{Gint}	$T_j = 25\text{ °C}$		4.25		Ω
$t_{d(on)}$	$V_{CC} = 1200\text{ V}$ $I_C = 150\text{ A}$	$T_j = 125\text{ °C}$	265		ns
t_r	$V_{GE} = \pm 15\text{ V}$	$T_j = 125\text{ °C}$	55		ns
E_{on}	$R_{G on} = 9\text{ }\Omega$	$T_j = 125\text{ °C}$	90		mJ
$t_{d(off)}$	$R_{G off} = 9\text{ }\Omega$	$T_j = 125\text{ °C}$	875		ns
t_f		$T_j = 125\text{ °C}$	125		ns
E_{off}		$T_j = 125\text{ °C}$	55		mJ
$R_{th(j-c)}$	per IGBT			0.12	K/W

SEMiX252GB176HDs



SEMiX[®] 2s

Trench IGBT Modules

SEMiX252GB176HDs


Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- UL recognised file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
Inverse diode						
$V_F = V_{EC}$	$I_F = 150 \text{ A}$ $V_{GE} = 0 \text{ V}$ chip	$T_j = 25 \text{ }^\circ\text{C}$		1.6	1.75	V
		$T_j = 125 \text{ }^\circ\text{C}$		1.5	1.7	V
V_{F0}		$T_j = 25 \text{ }^\circ\text{C}$	0.9	1.1	1.3	V
		$T_j = 125 \text{ }^\circ\text{C}$	0.7	0.9	1.1	V
r_F		$T_j = 25 \text{ }^\circ\text{C}$	3.0	3.0	3.0	m Ω
		$T_j = 125 \text{ }^\circ\text{C}$	4.0	4.0	4.0	m Ω
I_{RRM}	$I_F = 150 \text{ A}$	$T_j = 125 \text{ }^\circ\text{C}$		205		A
Q_{rr}	$di/dt_{off} = 3300 \text{ A}/\mu\text{s}$	$T_j = 125 \text{ }^\circ\text{C}$		55		μC
E_{rr}	$V_{GE} = -15 \text{ V}$ $V_{CC} = 1200 \text{ V}$	$T_j = 125 \text{ }^\circ\text{C}$		32		mJ
$R_{th(j-c)}$	per diode				0.19	K/W
Module						
L_{CE}				18		nH
R_{CC+EE}	res., terminal-chip	$T_C = 25 \text{ }^\circ\text{C}$		0.7		m Ω
		$T_C = 125 \text{ }^\circ\text{C}$		1		m Ω
$R_{th(c-s)}$	per module			0.045		K/W
M_s	to heat sink (M5)		3		5	Nm
M_t		to terminals (M6)	2.5		5	Nm
						Nm
w					250	g
Temperatur Sensor						
R_{100}	$T_c = 100^\circ\text{C}$ ($R_{25} = 5 \text{ k}\Omega$)			$493 \pm 5\%$		Ω
$B_{100/125}$	$R_{(T)} = R_{100} \exp[B_{100/125}(1/T - 1/T_{100})]$; T[K];			$3550 \pm 2\%$		K

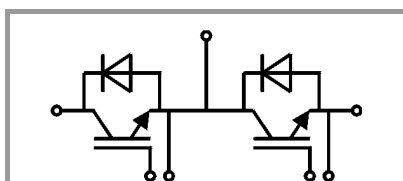

GB

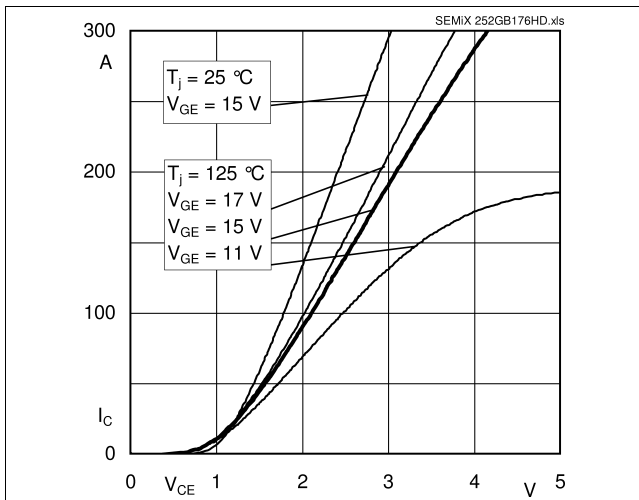


Fig. 1: Typ. output characteristic, inclusive $R_{CC}'+EE'$

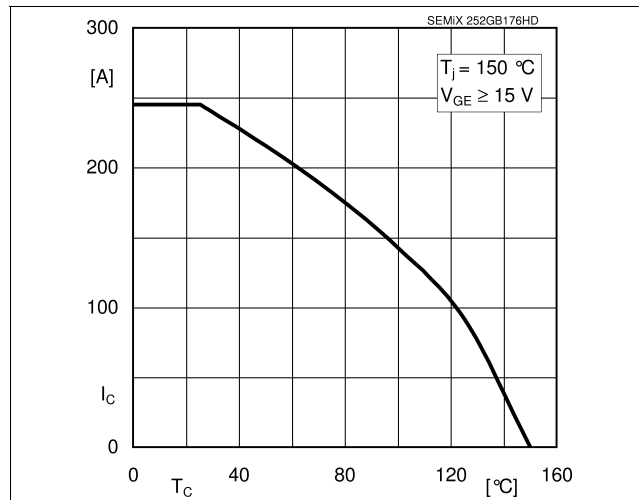


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

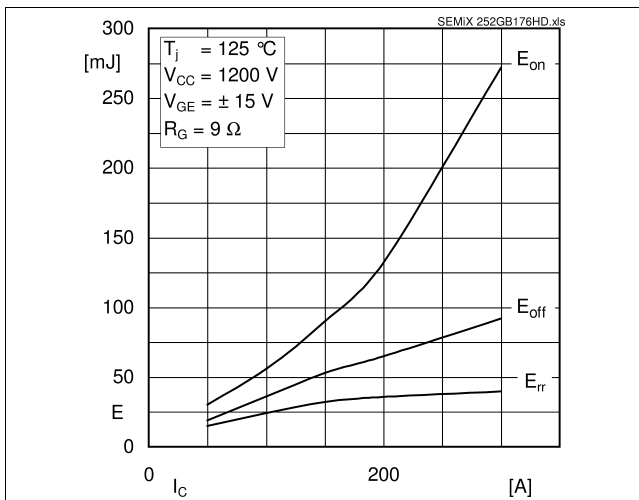


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

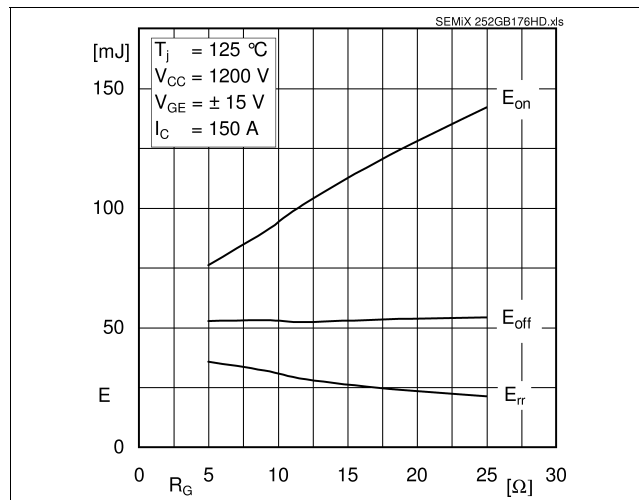


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

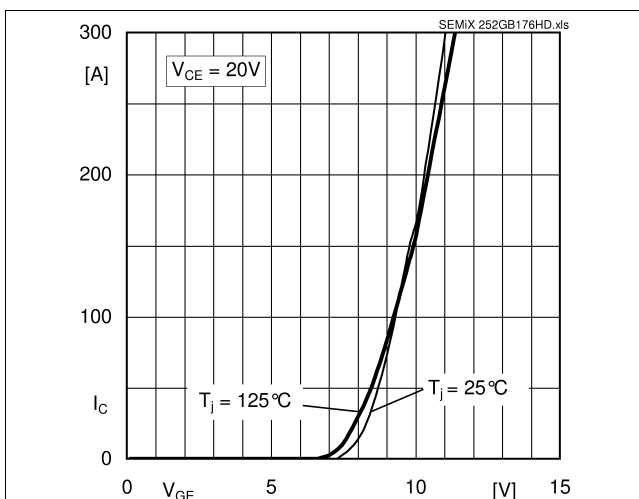


Fig. 5: Typ. transfer characteristic







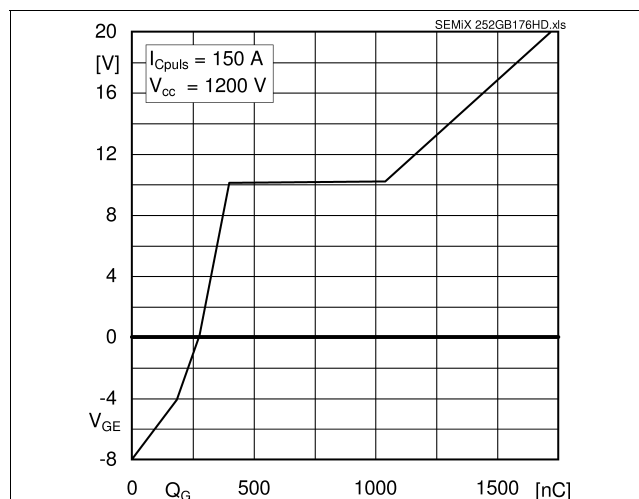


Fig. 6: Typ. gate charge characteristic

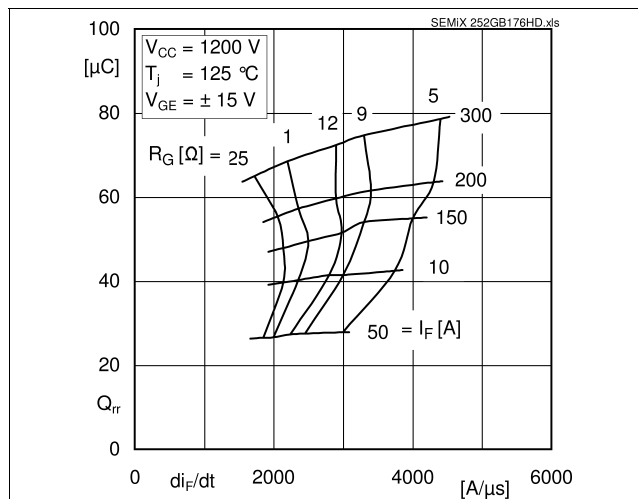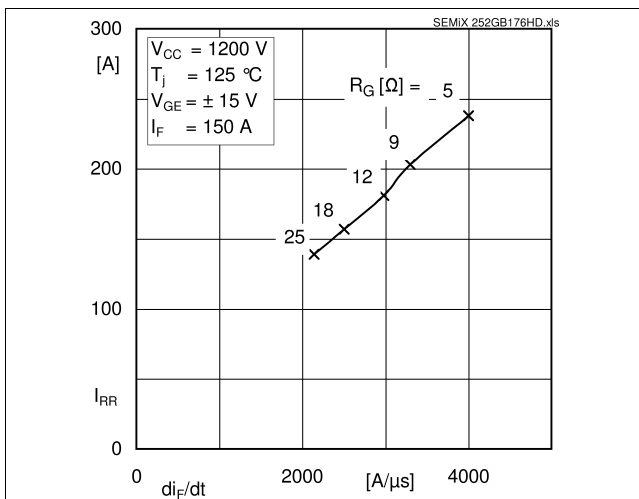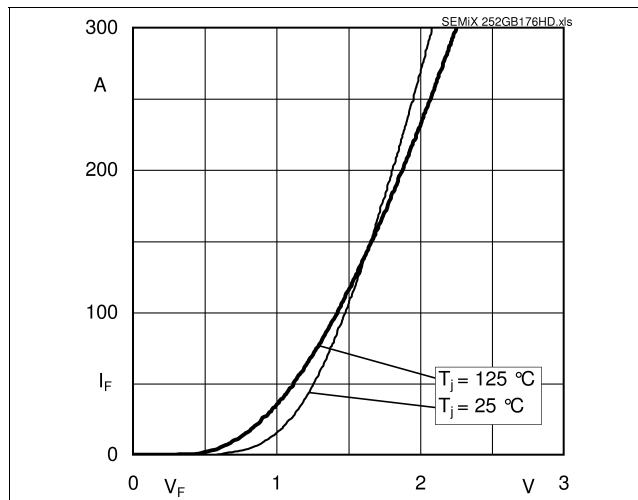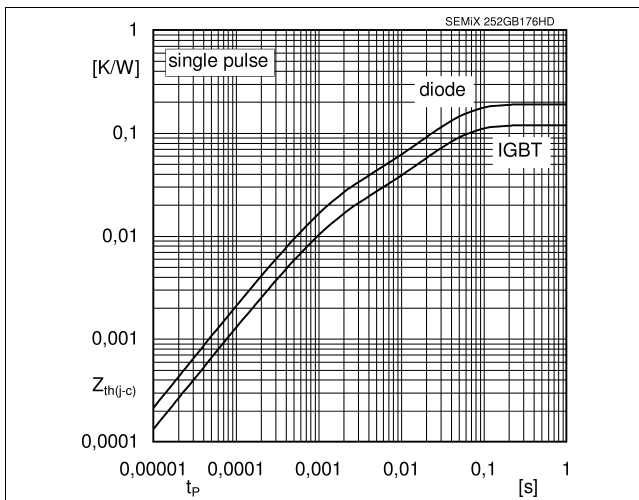
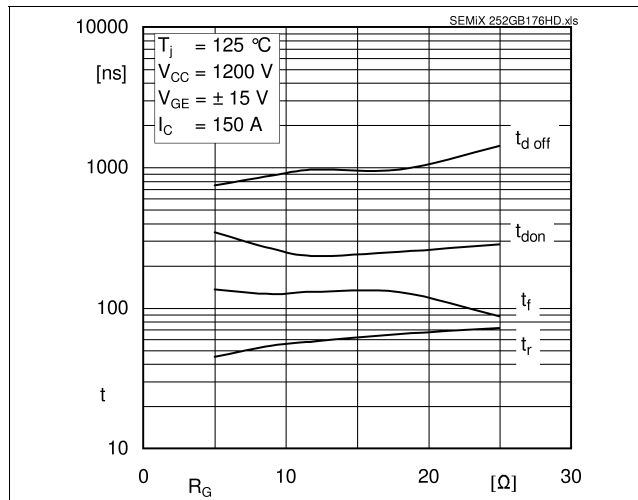
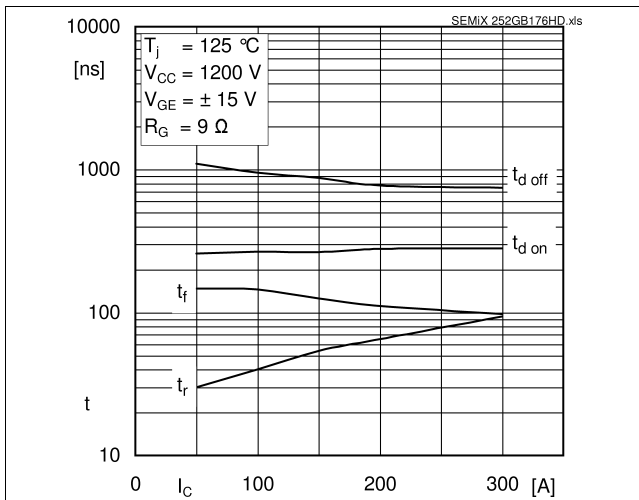


SEMIX252GB176HDs



Case: SEMiX 2s

	0,3	connector 1-2 / 3-4
	0,2	each connector A

general tolerance:
ISO 2768-m
ISO 8015

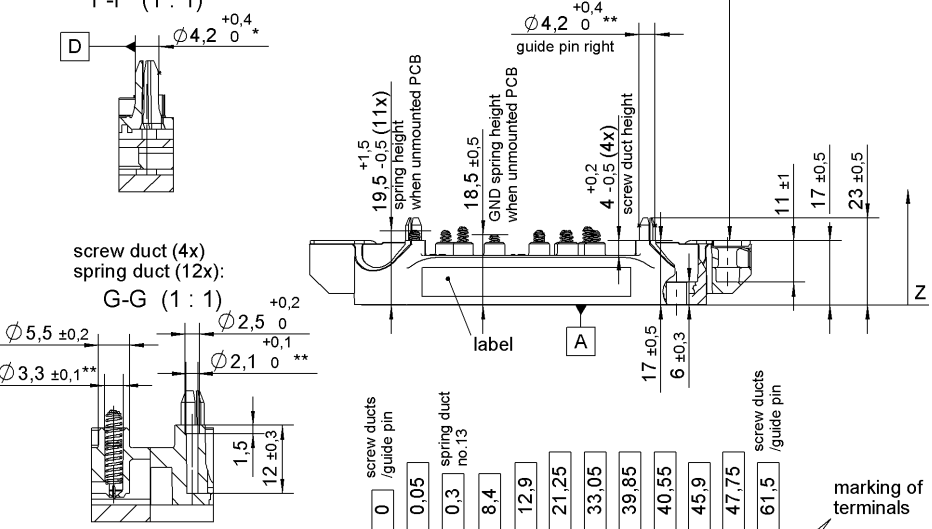

All measures in Z-direction
valid when mounted to heat sink

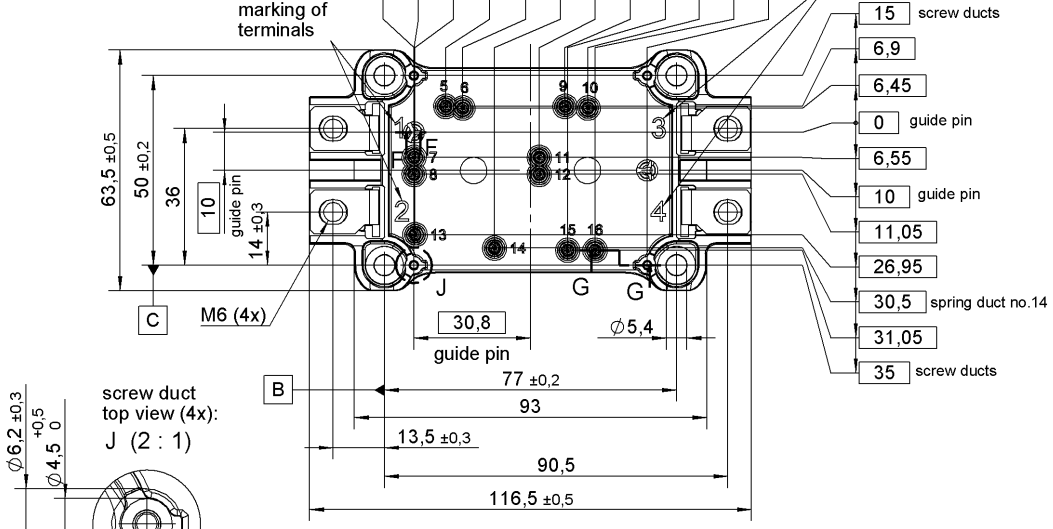


*guide pin left with $\phi 0,25$ A B C

**screw ducts / spring ducts / guide pin right with $\phi 0,5$ A D C

Rules for the contact PCB:
- holes guidepins = $\phi 4 \pm 0,1$ / position tolerance $\pm 0,1$
- holes for screws = $\phi 3,3 \pm 0,1$ / position tolerance $\pm 0,1$
- spring contact pad = $\phi 3,6 \pm 0,1$ / position tolerance $\pm 0,1$

SEMIX 2s

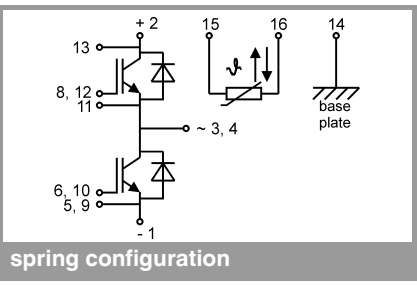

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.