

SEMiX202GB066HDs



SEMiX[®] 2s

Trench IGBT Modules

SEMiX202GB066HDs

Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- UL recognised file no. E63532

Typical Applications*

- Matrix Converter
- Resonant Inverter
- Current Source Inverter

Remarks

- Case temperature limited to $T_C=125^\circ\text{C}$ max.
- Product reliability results are valid for $T_J=150^\circ\text{C}$
- For short circuit: Soft R_{Goff} recommended
- Take care of over-voltage caused by stray inductance

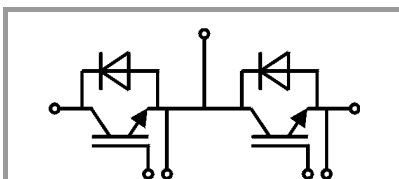

GB

Absolute Maximum Ratings

Symbol	Conditions	Values	Unit	
IGBT				
V_{CES}	$T_J = 25^\circ\text{C}$	600	V	
I_C	$T_J = 175^\circ\text{C}$	$T_C = 25^\circ\text{C}$	274	A
		$T_C = 80^\circ\text{C}$	207	A
I_{Cnom}		200	A	
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$	400	A	
V_{GES}		-20 ... 20	V	
t_{psc}	$V_{CC} = 360\text{ V}$ $V_{GE} \leq 15\text{ V}$ $V_{CES} \leq 600\text{ V}$	$T_J = 150^\circ\text{C}$	6	μs
			T_J	-40 ... 175
Inverse diode				
I_F	$T_J = 175^\circ\text{C}$	$T_C = 25^\circ\text{C}$	291	A
		$T_C = 80^\circ\text{C}$	214	A
I_{Fnom}		200	A	
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	400	A	
I_{FSM}	$t_p = 10\text{ ms, sin } 180^\circ, T_J = 25^\circ\text{C}$	1000	A	
T_J		-40 ... 175	$^\circ\text{C}$	
Module				
$I_{t(RMS)}$	$T_{terminal} = 80^\circ\text{C}$	600	A	
T_{stg}		-40 ... 125	$^\circ\text{C}$	
V_{isol}	AC sinus 50Hz, $t = 1\text{ min}$	4000	V	

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
IGBT					
$V_{CE(sat)}$	$I_C = 200\text{ A}$ $V_{GE} = 15\text{ V}$ chipllevel	$T_J = 25^\circ\text{C}$	1.45	1.85	V
		$T_J = 150^\circ\text{C}$	1.7	2.1	V
V_{CE0}		$T_J = 25^\circ\text{C}$	0.9	1	V
		$T_J = 150^\circ\text{C}$	0.85	0.9	V
r_{CE}	$V_{GE} = 15\text{ V}$	$T_J = 25^\circ\text{C}$	2.8	4.3	$\text{m}\Omega$
		$T_J = 150^\circ\text{C}$	4.3	6.0	$\text{m}\Omega$
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 3.2\text{ mA}$	5	5.8	6.5	V
I_{CES}	$V_{GE} = 0\text{ V}$ $V_{CE} = 600\text{ V}$	$T_J = 25^\circ\text{C}$	0.15	0.45	mA
		$T_J = 150^\circ\text{C}$			mA
C_{ies}	$V_{CE} = 25\text{ V}$		12.3		nF
C_{oes}	$V_{GE} = 0\text{ V}$		0.77		nF
C_{res}			0.37		nF
Q_G	$V_{GE} = -8\text{ V...} + 15\text{ V}$		1600		nC
R_{Gint}	$T_J = 25^\circ\text{C}$		1.00		Ω
$t_{d(on)}$	$V_{CC} = 300\text{ V}$ $I_C = 200\text{ A}$		65		ns
t_r	$V_{GE} = \pm 15\text{ V}$	$T_J = 150^\circ\text{C}$	80		ns
		$T_J = 150^\circ\text{C}$	6		mJ
E_{on}	$R_{G on} = 4.2\ \Omega$		6		mJ
$t_{d(off)}$	$R_{G off} = 4.2\ \Omega$		545		ns
t_f			95		ns
E_{off}			8		mJ
$R_{th(j-c)}$	per IGBT			0.21	K/W

SEMiX202GB066HDs



SEMiX[®] 2s

Trench IGBT Modules

SEMiX202GB066HDs

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- UL recognised file no. E63532


Typical Applications*

- Matrix Converter
- Resonant Inverter
- Current Source Inverter

Remarks

- Case temperature limited to $T_C=125^\circ\text{C}$ max.
- Product reliability results are valid for $T_J=150^\circ\text{C}$
- For short circuit: Soft R_{Goff} recommended
- Take care of over-voltage caused by stray inductance

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
Inverse diode						
$V_F = V_{EC}$	$I_F = 200\text{ A}$ $V_{GE} = 0\text{ V}$ chip	$T_J = 25^\circ\text{C}$		1.4	1.60	V
		$T_J = 150^\circ\text{C}$		1.4	1.6	V
V_{F0}		$T_J = 25^\circ\text{C}$	0.9	1	1.1	V
		$T_J = 150^\circ\text{C}$	0.75	0.85	0.95	V
r_F		$T_J = 25^\circ\text{C}$	1.5	2.0	2.5	m Ω
		$T_J = 150^\circ\text{C}$	2.3	2.8	3.3	m Ω
I_{RRM}	$I_F = 200\text{ A}$	$T_J = 150^\circ\text{C}$		205		A
Q_{rr}	$di/dt_{off} = 3900\text{ A}/\mu\text{s}$	$T_J = 150^\circ\text{C}$		28		μC
E_{rr}	$V_{GE} = -8\text{ V}$ $V_{CC} = 300\text{ V}$	$T_J = 150^\circ\text{C}$		6.5		mJ
$R_{th(j-c)}$	per diode				0.27	K/W
Module						
L_{CE}				18		nH
R_{CC+EE}	res., terminal-chip	$T_C = 25^\circ\text{C}$		0.7		m Ω
		$T_C = 125^\circ\text{C}$		1		m Ω
$R_{th(c-s)}$	per module			0.045		K/W
M_s	to heat sink (M5)		3		5	Nm
M_t		to terminals (M6)	2.5		5	Nm
						Nm
w					250	g
Temperatur Sensor						
R_{100}	$T_c=100^\circ\text{C}$ ($R_{25}=5\text{ k}\Omega$)			$493 \pm 5\%$		Ω
$B_{100/125}$	$R_{(T)}=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; T[K];			$3550 \pm 2\%$		K

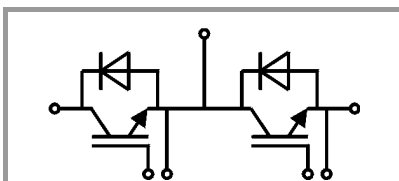

GB

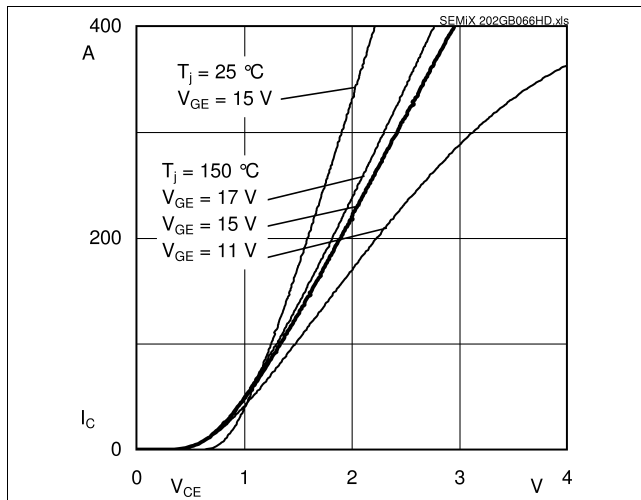


Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

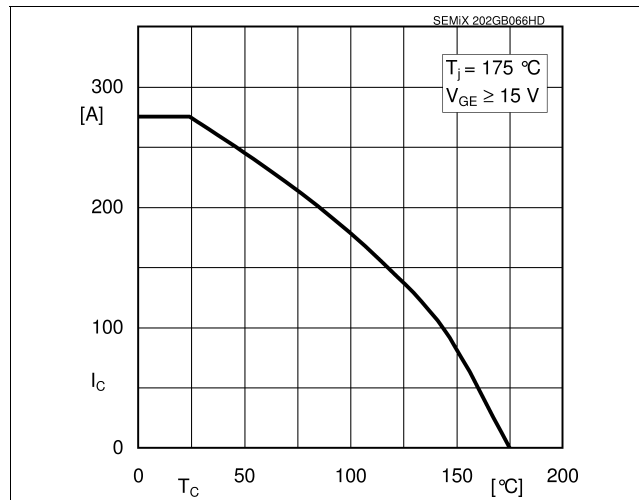


Fig. 2: Rated current vs. temperature $I_c = f(T_C)$

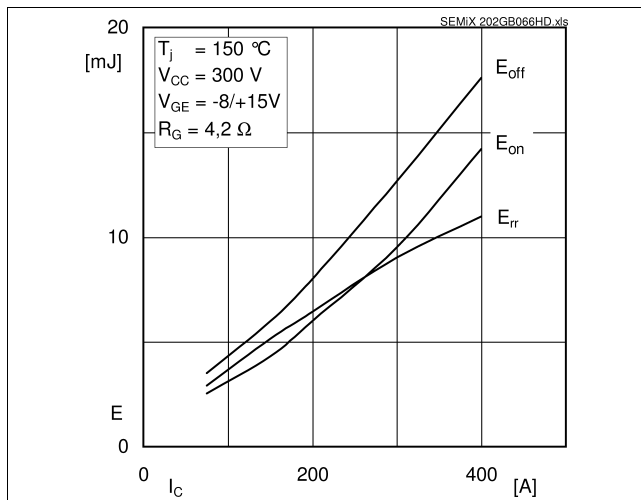


Fig. 3: Typ. turn-on /-off energy = $f(I_c)$

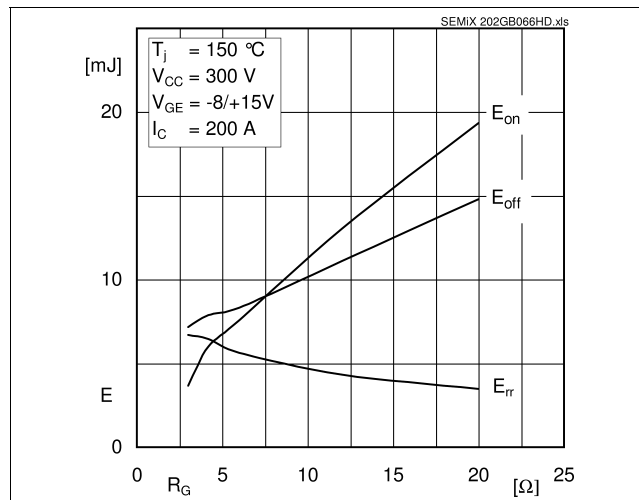


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

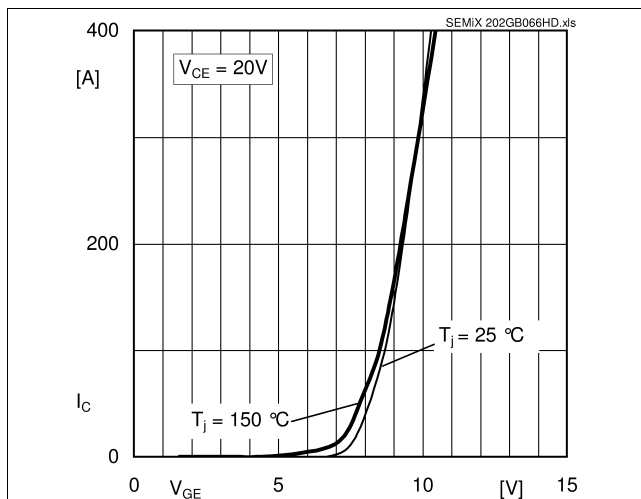


Fig. 5: Typ. transfer characteristic

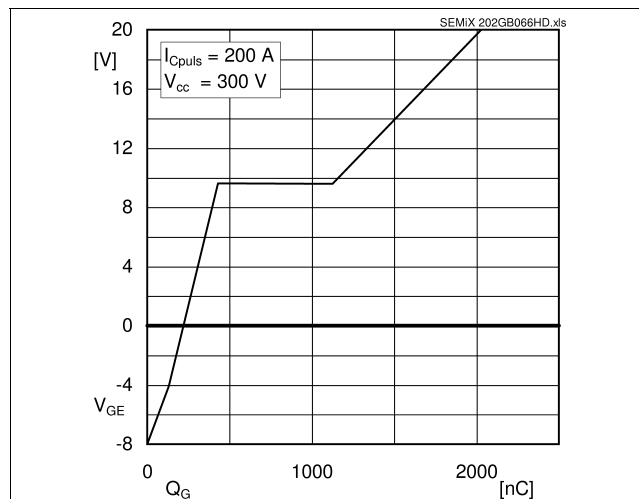


Fig. 6: Typ. gate charge characteristic

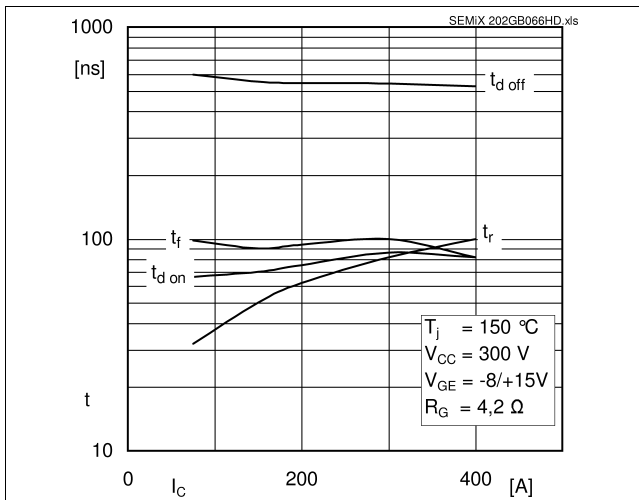


Fig. 7: Typ. switching times vs. I_C

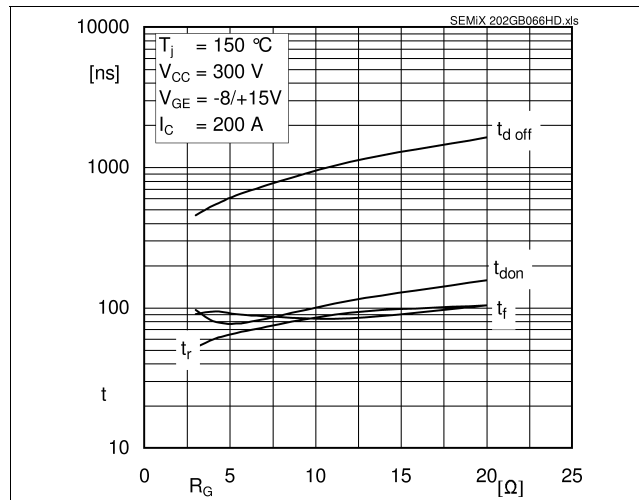


Fig. 8: Typ. switching times vs. gate resistor R_G

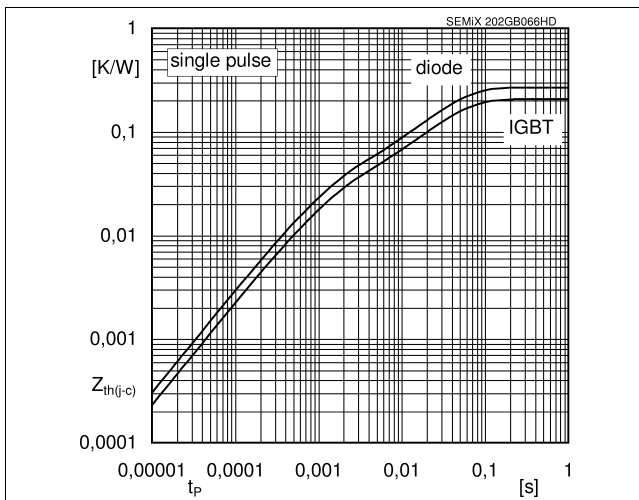


Fig. 9: Typ. transient thermal impedance

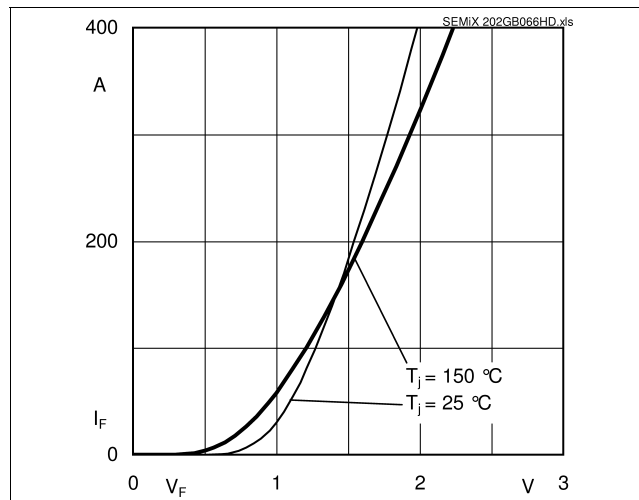


Fig. 10: Typ. CAL diode forward charact., incl. R_{CC+EE}

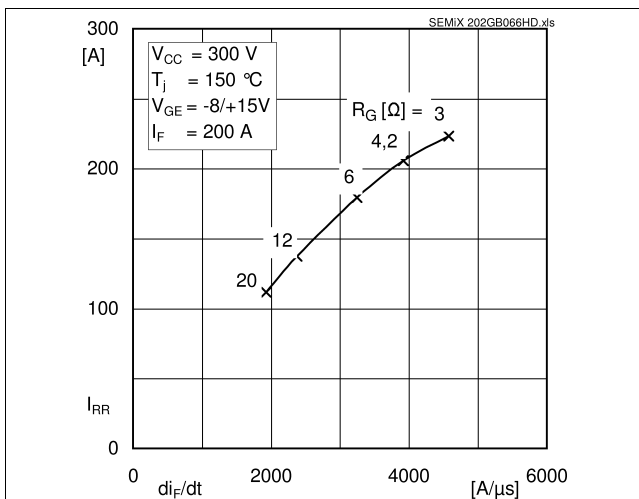


Fig. 11: Typ. CAL diode peak reverse recovery current

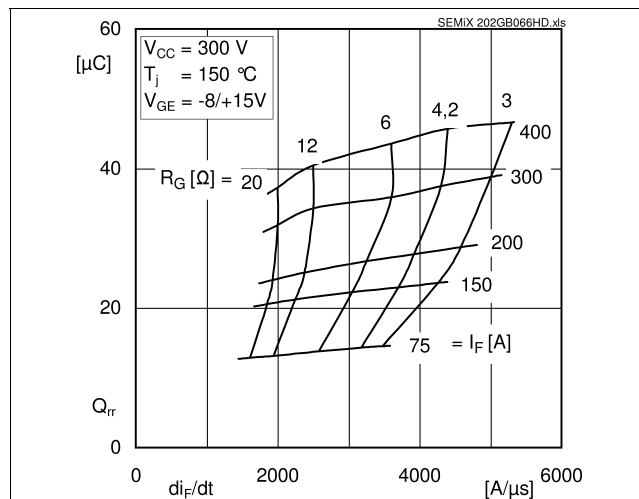


Fig. 12: Typ. CAL diode recovery charge

