SEMiX703GAR126HDs

SEMiX® 3s

Trench IGBT Modules

SEMiX703GAR126HDs

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognised file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperatur limited to T_C=125°C max.
- Not for new design

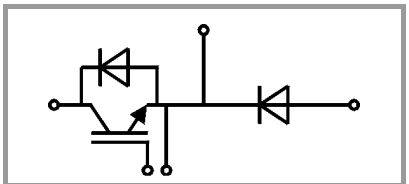

GAR

Absolute Maximum Ratings				
Symbol	**Conditions**		**Values**	**Unit**
IGBT				
V_{CES}	T_j = 25 °C		1200	V
I_C	T_j = 150 °C	T_c = 25 °C	642	A
		T_c = 80 °C	449	A
I_{Cnom}			450	A
I_{CRM}	I_{CRM} = 2xI_{Cnom}		900	A
V_{GES}			-20 ... 20	V
t_{psc}	V_{CC} = 600 V V_{GE} ≤ 20 V V_{CES} ≤ 1200 V	T_j = 125 °C	10	µs
T_j			-40 ... 150	°C
Inverse diode				
I_F	T_j = 150 °C	T_c = 25 °C	561	A
		T_c = 80 °C	384	A
I_{Fnom}			450	A
I_{FRM}	I_{FRM} = 2xI_{Fnom}		900	A
I_{FSM}	t_p = 10 ms, sin 180°, T_j = 25 °C		2900	A
T_j			-40 ... 150	°C
Freewheeling diode				
I_F	T_j = 150 °C	T_c = 25 °C	533	A
		T_c = 80 °C	367	A
I_{Fnom}			450	A
I_{FRM}	I_{FRM} = 2xI_{Fnom}		900	A
I_{FSM}	t_p = 10 ms, sin 180°, T_j = 25 °C		2900	A
T_j			-40 ... 150	°C
Module				
$I_{t(RMS)}$	$T_{terminal}$ = 80 °C		600	A
T_{stg}			-40 ... 125	°C
V_{isol}	AC sinus 50Hz, t = 1 min		4000	V

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
IGBT						
$V_{CE(sat)}$	I_C = 450 A V_{GE} = 15 V chiplevel	T_j = 25 °C		1.7	2.1	V
		T_j = 125 °C		2.0	2.45	V
V_{CE0}		T_j = 25 °C		1	1.2	V
		T_j = 125 °C		0.9	1.1	V
r_{CE}	V_{GE} = 15 V	T_j = 25 °C		1.6	2.0	mΩ
		T_j = 125 °C		2.4	3.0	mΩ
$V_{GE(th)}$	V_{GE}=V_{CE}, I_C = 18 mA		5	5.8	6.5	V
I_{CES}	V_{GE} = 0 V V_{CE} = 1200 V	T_j = 25 °C		0.1	0.3	mA
		T_j = 125 °C				mA
C_{ies}	V_{CE} = 25 V V_{GE} = 0 V	f = 1 MHz		32.3		nF
C_{oes}		f = 1 MHz		1.69		nF
C_{res}		f = 1 MHz		1.46		nF
Q_G	V_{GE} = - 8 V...+ 15 V			3600		nC
R_{Gint}	T_j = 25 °C			1.67		Ω

Downloaded from Elcodis.com electronic components distributor

SEMiX® 3s

Trench IGBT Modules

SEMiX703GAR126HDs

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognised file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperatur limited to T_C=125°C max.
- Not for new design

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
$t_{d(on)}$	V_{CC} = 600 V I_C = 450 A V_{GE} = ±15 V $R_{G\ on}$ = 1.6 Ω $R_{G\ off}$ = 1.6 Ω	T_j = 125 °C		310		ns
t_r		T_j = 125 °C		60		ns
E_{on}		T_j = 125 °C		32		mJ
$t_{d(off)}$		T_j = 125 °C		680		ns
t_f		T_j = 125 °C		135		ns
E_{off}		T_j = 125 °C		68		mJ
$R_{th(j-c)}$	per IGBT				0.061	K/W
Inverse diode						
$V_F = V_{EC}$	I_F = 450 A V_{GE} = 0 V chip	T_j = 25 °C		1.6	1.80	V
		T_j = 125 °C		1.6	1.8	V
V_{F0}		T_j = 25 °C	0.9	1	1.1	V
		T_j = 125 °C	0.7	0.8	0.9	V
r_F		T_j = 25 °C	1.1	1.3	1.6	mΩ
		T_j = 125 °C	1.6	1.8	2.0	mΩ
I_{RRM}	I_F = 450 A di/dt_{off} = 8500 A/µs V_{GE} = -15 V V_{CC} = 600 V	T_j = 125 °C		580		A
Q_{rr}		T_j = 125 °C		130		µC
E_{rr}		T_j = 125 °C		60		mJ
$R_{th(j-c)}$	per diode				0.11	K/W
Freewheeling diode						
$V_F = V_{EC}$	I_F = 450 A V_{GE} = 0 V chip	T_j = 25 °C		1.7	1.91	V
		T_j = 125 °C		1.7	1.9	V
V_{F0}		T_j = 25 °C	0.9	1	1.1	V
		T_j = 125 °C	0.7	0.8	0.9	V
r_F		T_j = 25 °C	1.3	1.5	1.8	mΩ
		T_j = 125 °C	1.8	2.1	2.3	mΩ
I_{RRM}	I_F = 450 A di/dt_{off} = 8500 A/µs V_{GE} = -15 V V_{CC} = 600 V	T_j = 125 °C		580		A
Q_{rr}		T_j = 125 °C		130		µC
E_{rr}		T_j = 125 °C		60		mJ
$R_{th(j-c)}$	per diode				0.11	K/W
Module						
L_{CE}				20		nH
$R_{CC'+EE'}$	res., terminal-chip	T_C = 25 °C		0.7		mΩ
		T_C = 125 °C		1		mΩ
$R_{th(c-s)}$	per module			0.04		K/W
M_s	to heat sink (M5)		3		5	Nm
M_t		to terminals (M6)	2.5		5	Nm
						Nm
w					300	g
Temperatur Sensor						
R_{100}	T_c=100°C (R_{25}=5 kΩ)			493 ± 5%		Ω
$B_{100/125}$	$R_{(T)}=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; T[K];			3550 ±2%		K

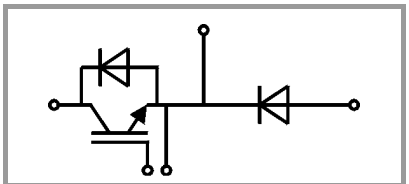

GAR

Downloaded from Elcodis.com electronic components distributor

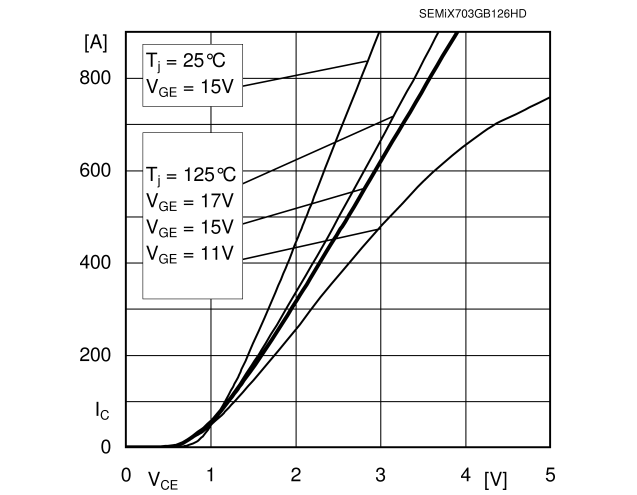

Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

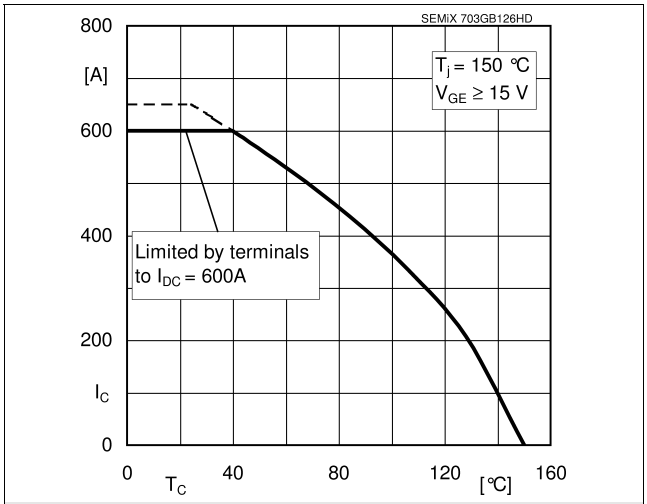

Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

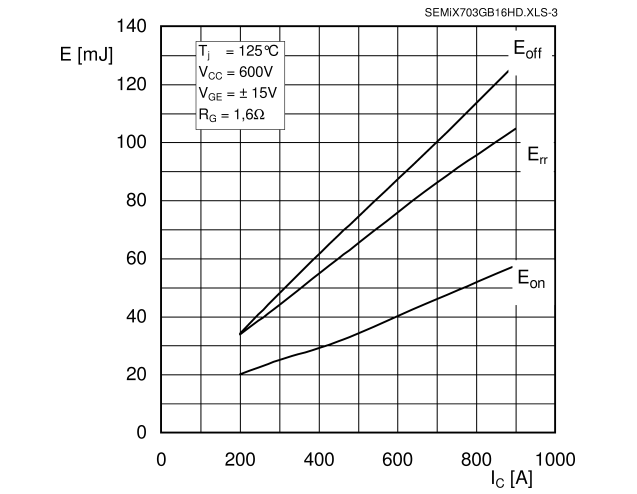

Fig. 3: Typ. turn-on /-off energy = f (I_C)

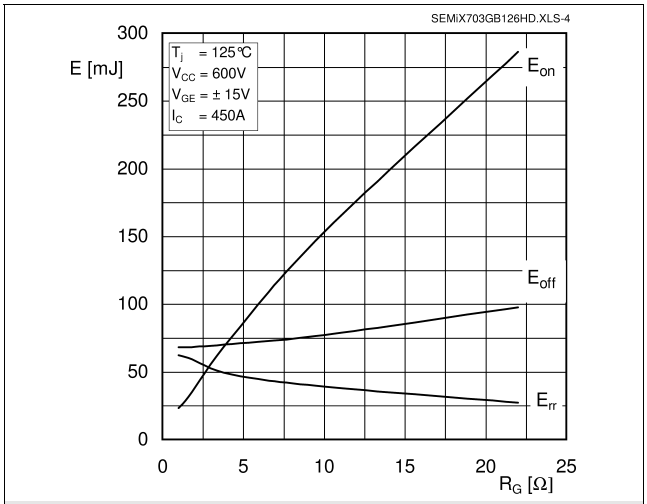

Fig. 4: Typ. turn-on /-off energy = f (R_G)

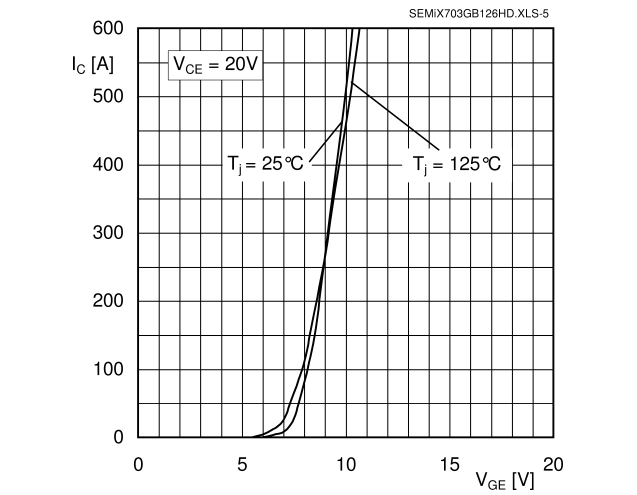

Fig. 5: Typ. transfer characteristic

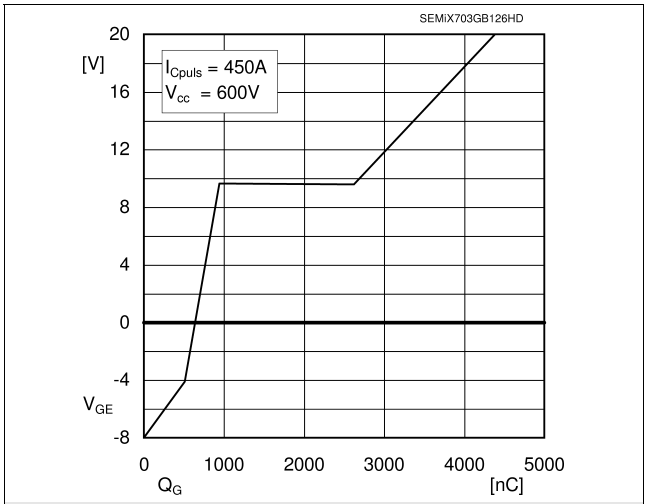

Fig. 6: Typ. gate charge characteristic

Downloaded from Elcodis.com electronic components distributor

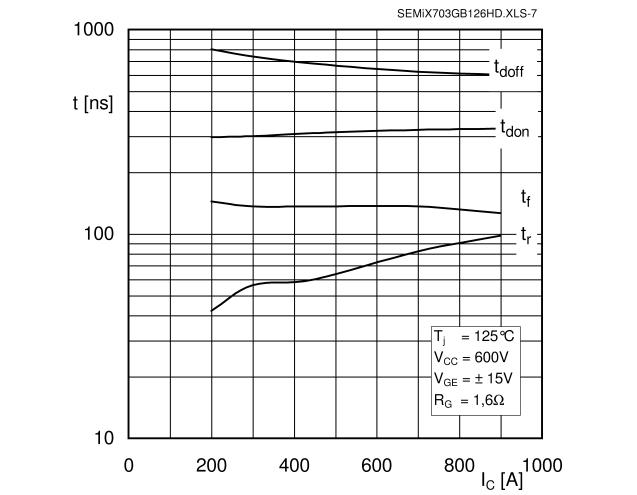

Fig. 7: Typ. switching times vs. I_C

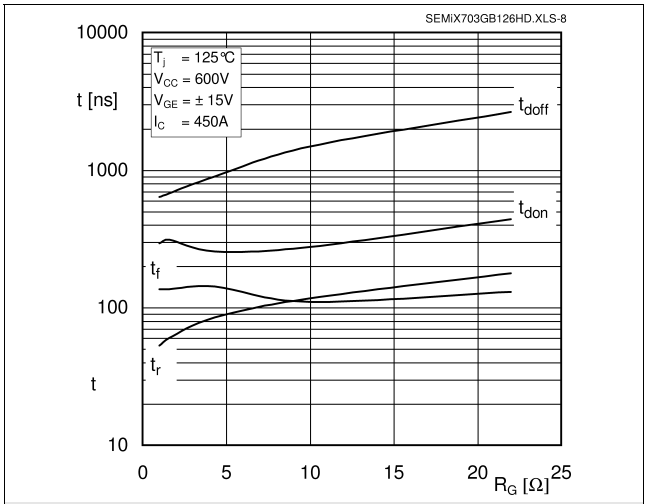

Fig. 8: Typ. switching times vs. gate resistor R_G

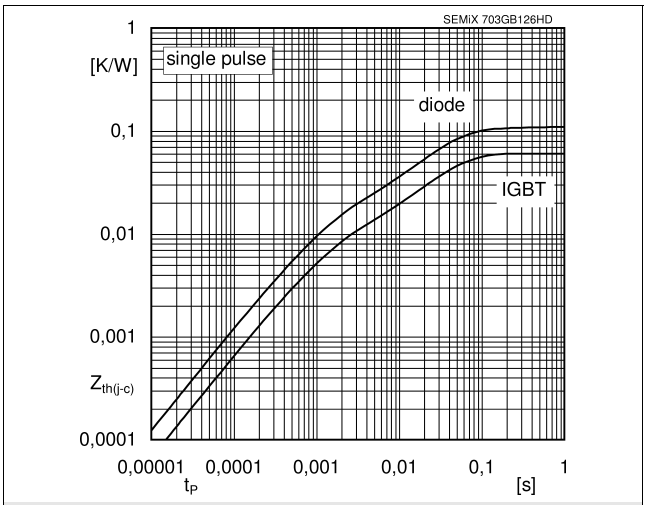

Fig. 9: Typ. transient thermal impedance

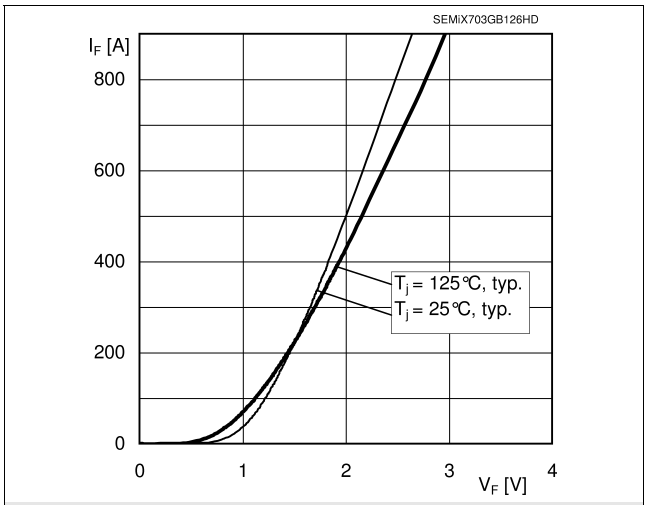

Fig. 10: Typ. CAL diode forward charact., incl. $R_{CC'+EE'}$

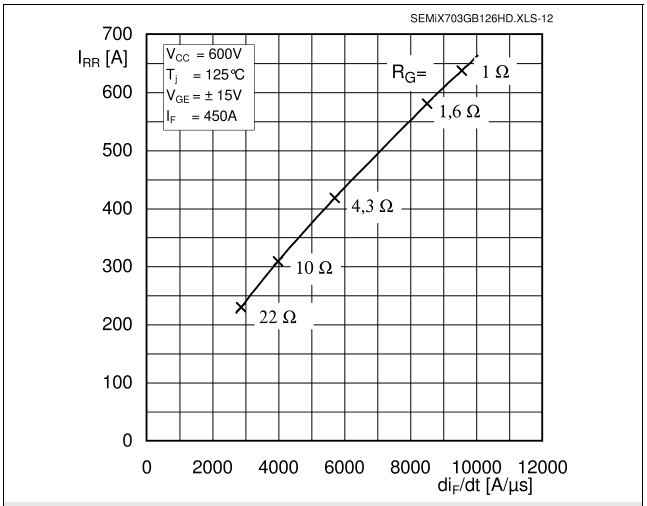

Fig. 11: Typ. CAL diode peak reverse recovery current

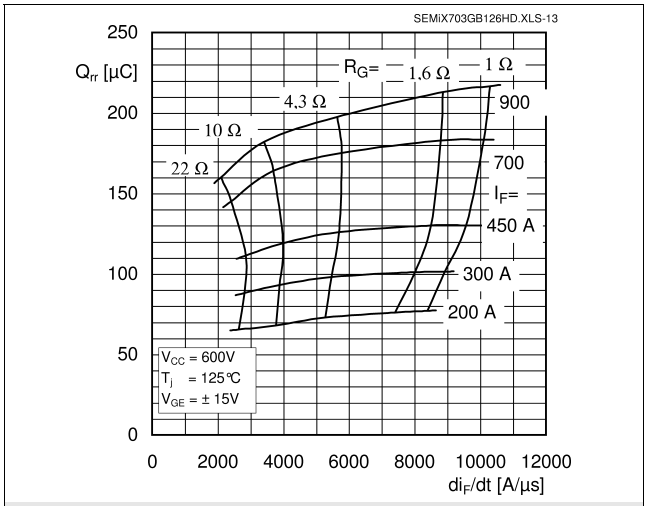

Fig. 12: Typ. CAL diode recovery charge

 © by SEMIKRON

Downloaded from Elcodis.com electronic components distributor

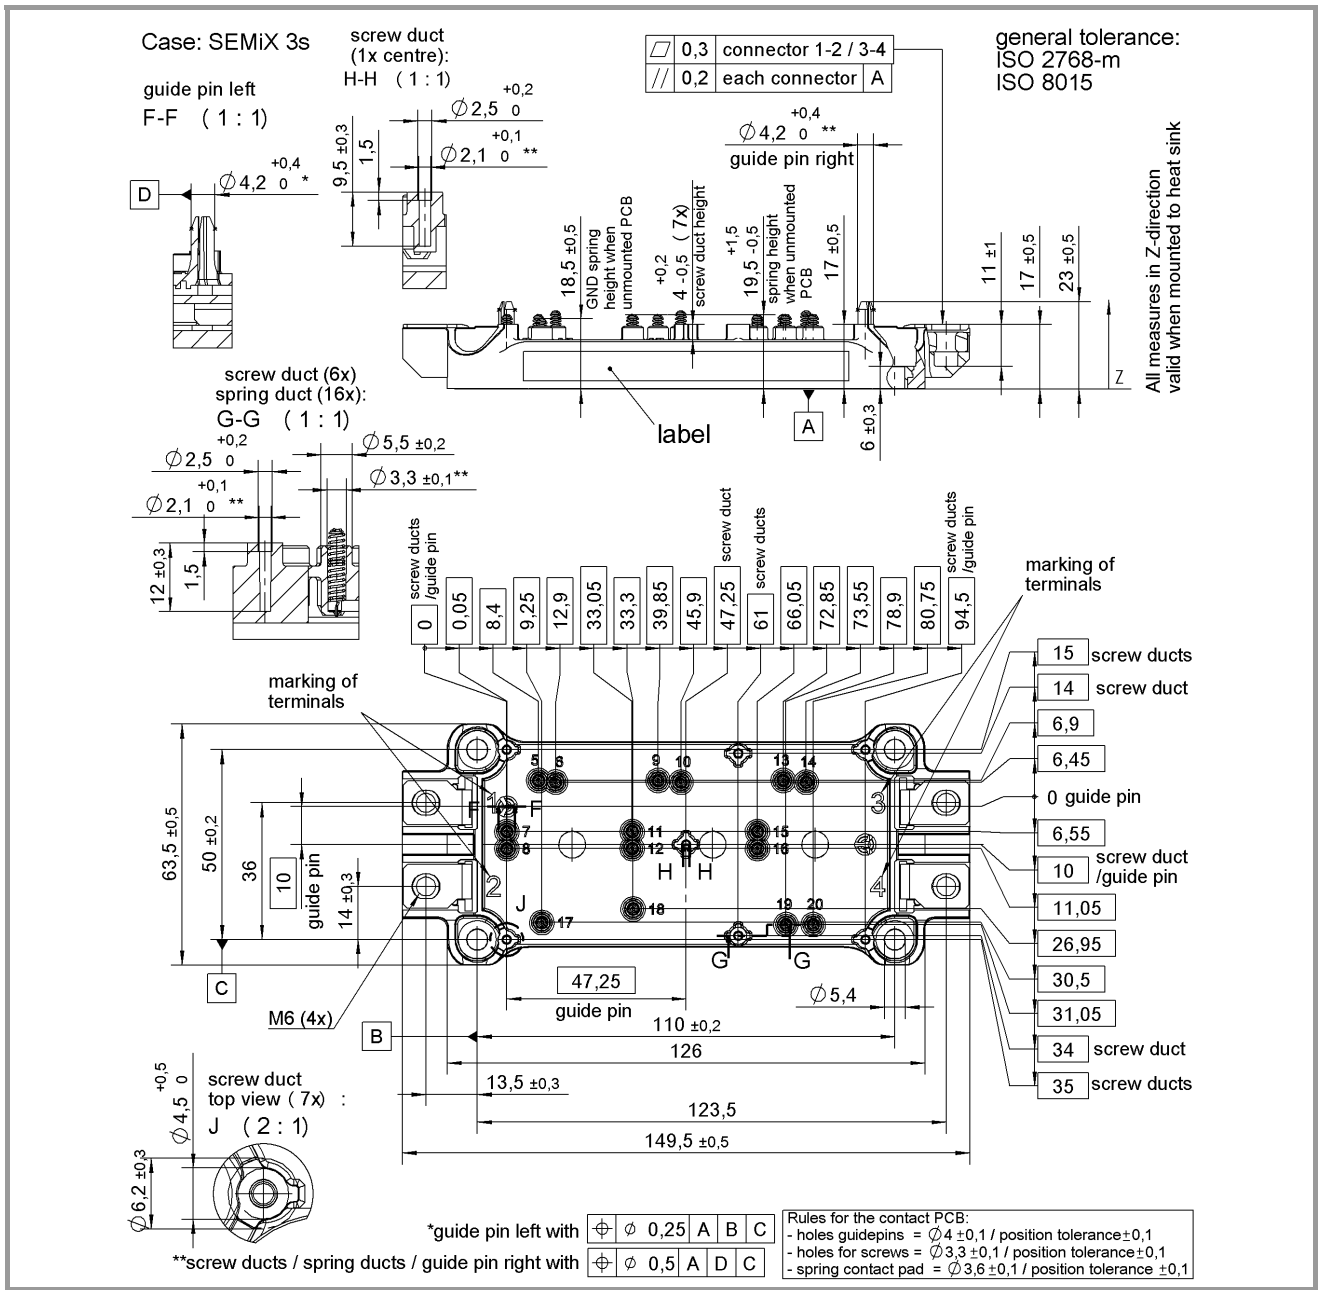

SEMiX 3s

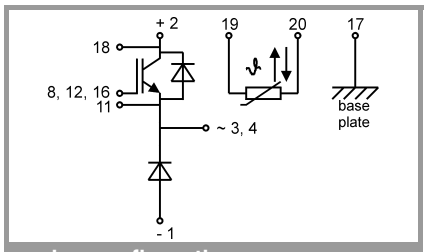

spring configuration

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.

Downloaded from Elcodis.com electronic components distributor