SEMiX202GB12E4s

SEMiX® 2s

Trench IGBT Modules

SEMiX202GB12E4s

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to T_C=125°C max.
- Product reliability results are valid for T_j=150°C
- Dynamic values apply to the following combination of resistors:
  $R_{Gon,main}$ = 1,0 Ω
  $R_{Goff,main}$ = 1,0 Ω
  $R_{G,X}$ = 2,2 Ω
  $R_{E,X}$ = 0,5 Ω

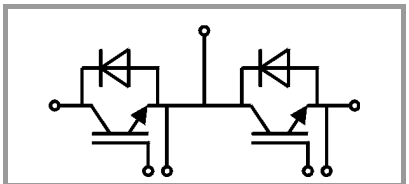

GB

Absolute Maximum Ratings				
Symbol	**Conditions**		**Values**	**Unit**
IGBT				
V_{CES}	T_j = 25 °C		1200	V
I_C	T_j = 175 °C	T_c = 25 °C	314	A
		T_c = 80 °C	242	A
I_{Cnom}			200	A
I_{CRM}	I_{CRM} = 3xI_{Cnom}		600	A
V_{GES}			-20 ... 20	V
t_{psc}	V_{CC} = 800 V V_{GE} ≤ 20 V V_{CES} ≤ 1200 V	T_j = 150 °C	10	µs
T_j			-40 ... 175	°C
Inverse diode				
I_F	T_j = 175 °C	T_c = 25 °C	229	A
		T_c = 80 °C	172	A
I_{Fnom}			200	A
I_{FRM}	I_{FRM} = 3xI_{Fnom}		600	A
I_{FSM}	t_p = 10 ms, sin 180°, T_j = 25 °C		990	A
T_j			-40 ... 175	°C
Module				
$I_{t(RMS)}$	$T_{terminal}$ = 80 °C		600	A
T_{stg}			-40 ... 125	°C
V_{isol}	AC sinus 50Hz, t = 1 min		4000	V

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
IGBT						
$V_{CE(sat)}$	I_C = 200 A V_{GE} = 15 V chiplevel	T_j = 25 °C		1.8	2.05	V
		T_j = 150 °C		2.2	2.4	V
V_{CE0}		T_j = 25 °C		0.8	0.9	V
		T_j = 150 °C		0.7	0.8	V
r_{CE}	V_{GE} = 15 V	T_j = 25 °C		5.0	5.8	mΩ
		T_j = 150 °C		7.5	8.0	mΩ
$V_{GE(th)}$	V_{GE}=V_{CE}, I_C = 7.6 mA		5	5.8	6.5	V
I_{CES}	V_{GE} = 0 V V_{CE} = 1200 V	T_j = 25 °C		0.1	0.3	mA
		T_j = 150 °C				mA
C_{ies}	V_{CE} = 25 V V_{GE} = 0 V	f = 1 MHz		12.3		nF
C_{oes}		f = 1 MHz		0.81		nF
C_{res}		f = 1 MHz		0.69		nF
Q_G	V_{GE} = - 8 V...+ 15 V			1130		nC
R_{Gint}	T_j = 25 °C			3.75		Ω
$t_{d(on)}$	V_{CC} = 600 V I_C = 200 A V_{GE} = ±15 V $R_{G\ on}$ = 2.4 Ω $R_{G\ off}$ = 2.4 Ω di/dt_{on} = 3600 A/µs di/dt_{off} = 2100 A/µs	T_j = 150 °C		253		ns
t_r		T_j = 150 °C		55		ns
E_{on}		T_j = 150 °C		22		mJ
$t_{d(off)}$		T_j = 150 °C		533		ns
t_f		T_j = 150 °C		113		ns
E_{off}		T_j = 150 °C		27.9		mJ
$R_{th(j-c)}$	per IGBT				0.14	K/W

Downloaded from Elcodis.com electronic components distributor

SEMiX® 2s

Trench IGBT Modules

SEMiX202GB12E4s

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to T_C=125°C max.
- Product reliability results are valid for T_j=150°C
- Dynamic values apply to the following combination of resistors:
  $R_{Gon,main}$ = 1,0 Ω
  $R_{Goff,main}$ = 1,0 Ω
  $R_{G,X}$ = 2,2 Ω
  $R_{E,X}$ = 0,5 Ω

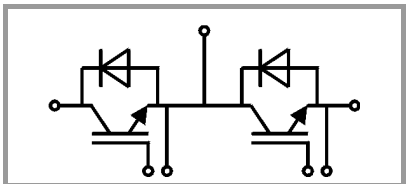

GB

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
Inverse diode						
$V_F = V_{EC}$	I_F = 200 A V_{GE} = 0 V chip	T_j = 25 °C		2.2	2.52	V
		T_j = 150 °C		2.1	2.5	V
V_{F0}		T_j = 25 °C	1.1	1.3	1.5	V
		T_j = 150 °C	0.7	0.9	1.1	V
r_F		T_j = 25 °C	4.0	4.5	5.1	mΩ
		T_j = 150 °C	5.3	6.3	6.8	mΩ
I_{RRM}	I_F = 200 A di/dt_{off} = 3400 A/µs V_{GE} = -15 V V_{CC} = 600 V	T_j = 150 °C		160		A
Q_{rr}		T_j = 150 °C		31.5		µC
E_{rr}		T_j = 150 °C		12		mJ
$R_{th(j-c)}$	per diode				0.26	K/W
Module						
L_{CE}				18		nH
$R_{CC'+EE'}$	res., terminal-chip	T_C = 25 °C		0.7		mΩ
		T_C = 125 °C		1		mΩ
$R_{th(c-s)}$	per module			0.045		K/W
M_s	to heat sink (M5)		3		5	Nm
M_t		to terminals (M6)	2.5		5	Nm
						Nm
w					250	g
Temperatur Sensor						
R_{100}	T_c=100°C (R_{25}=5 kΩ)			493 ± 5%		Ω
$B_{100/125}$	$R_{(T)}=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; T[K];			3550 ±2%		K

 © by SEMIKRON

Downloaded from Elcodis.com electronic components distributor

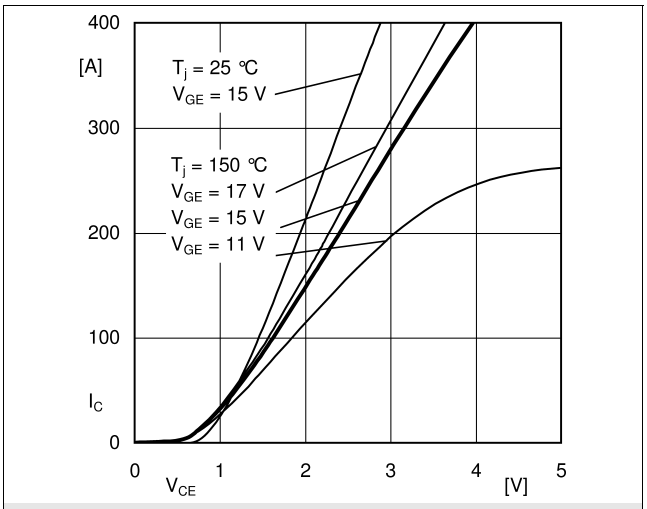

Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

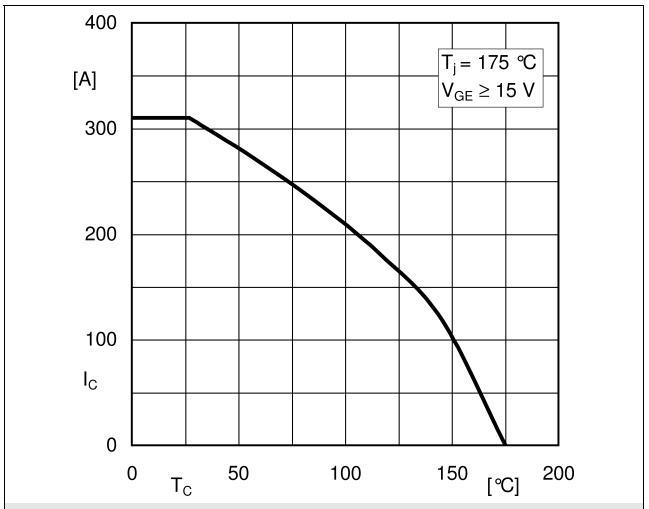

Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

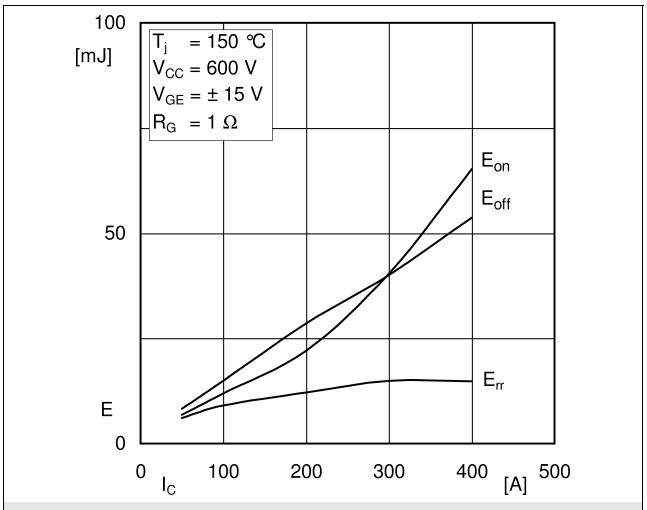

Fig. 3: Typ. turn-on /-off energy = f (I_C)

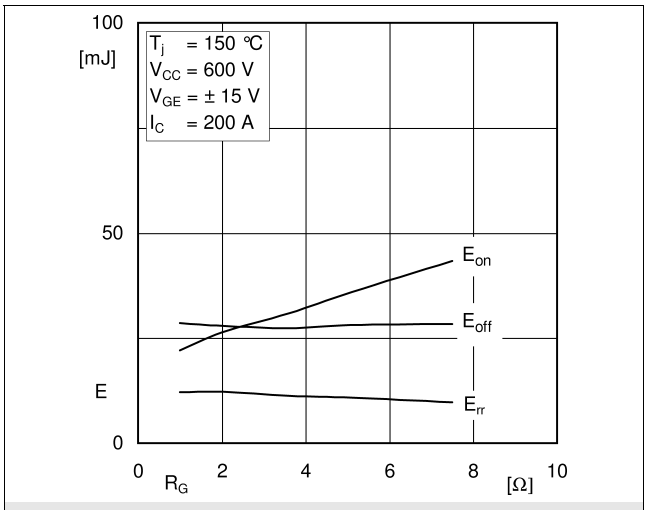

Fig. 4: Typ. turn-on /-off energy = f (R_G)

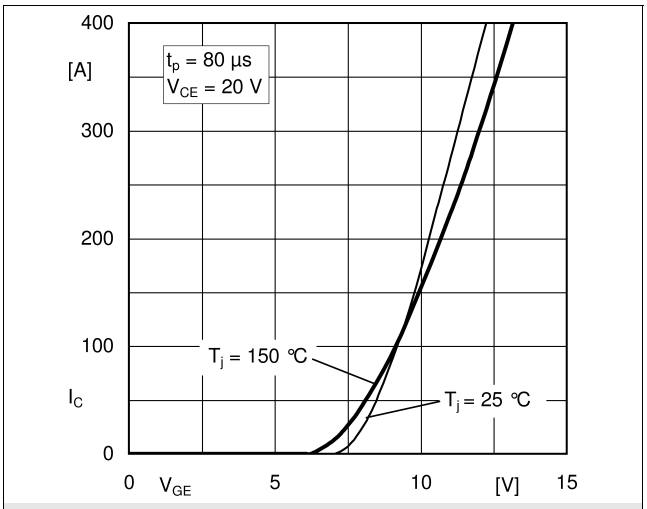

Fig. 5: Typ. transfer characteristic

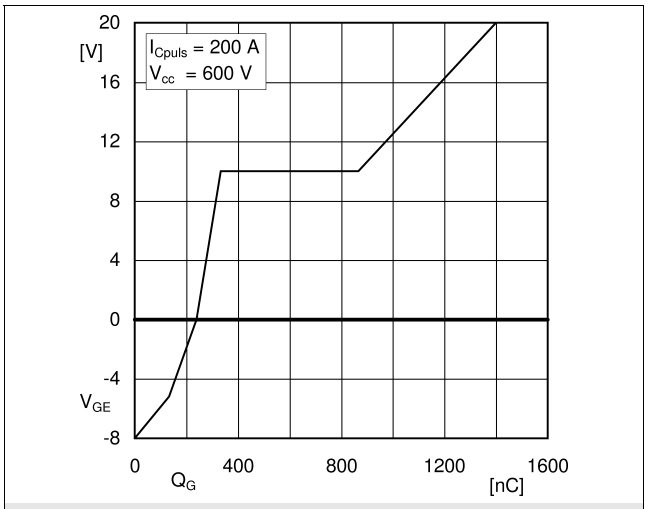

Fig. 6: Typ. gate charge characteristic

Downloaded from Elcodis.com electronic components distributor

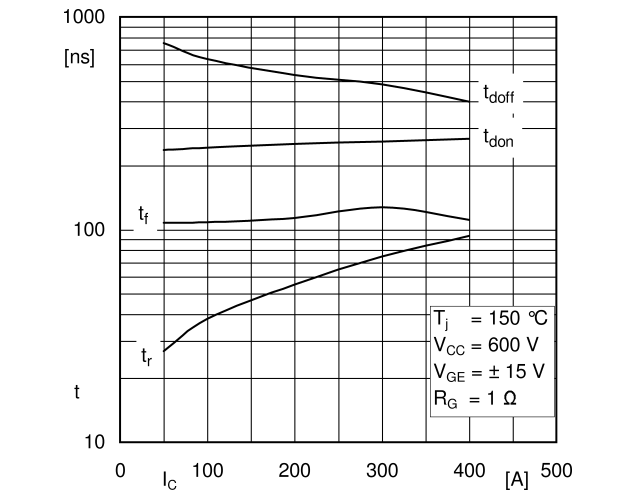

Fig. 7: Typ. switching times vs. I_C

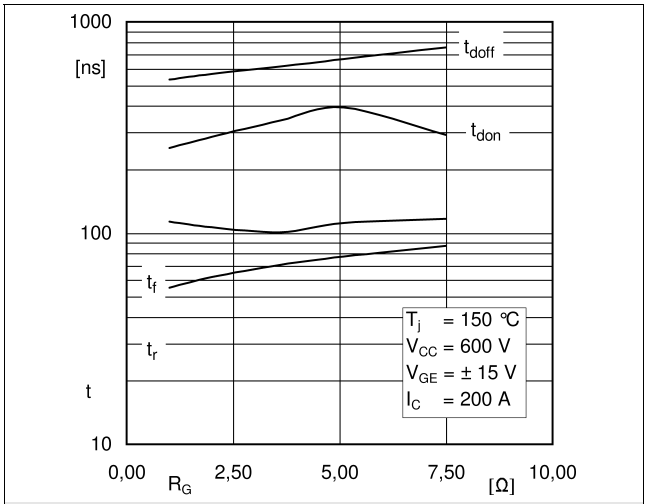

Fig. 8: Typ. switching times vs. gate resistor R_G

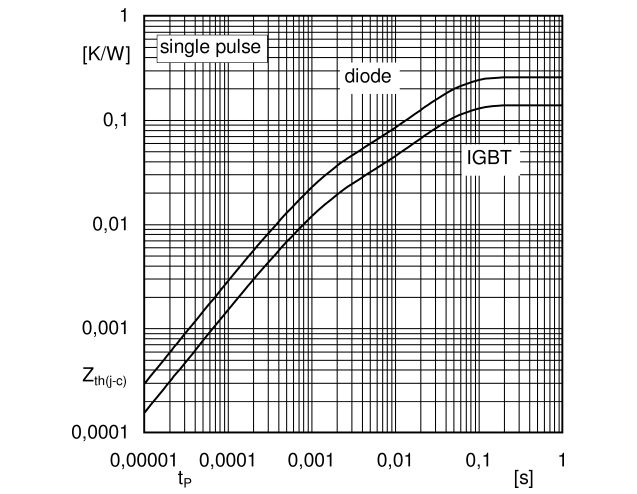

Fig. 9: Typ. transient thermal impedance

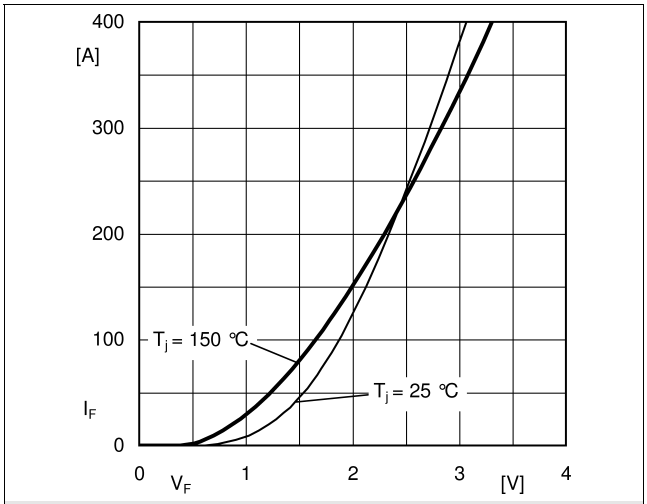

Fig. 10: Typ. CAL diode forward charact., incl. $R_{CC'+EE'}$

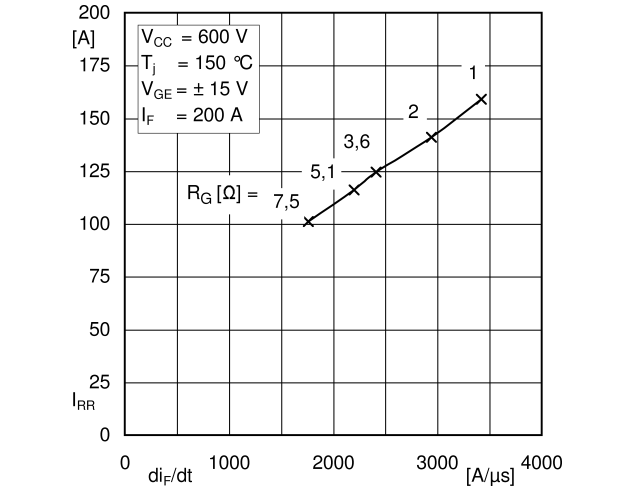

Fig. 11: Typ. CAL diode peak reverse recovery current

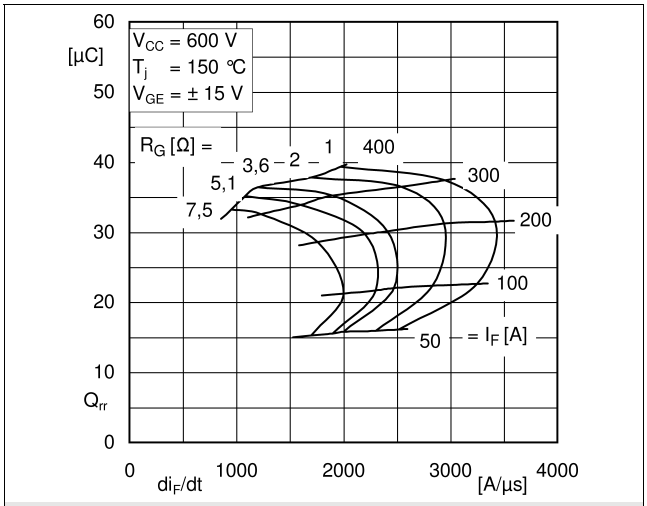

Fig. 12: Typ. CAL diode recovery charge

 © by SEMIKRON

Downloaded from Elcodis.com electronic components distributor

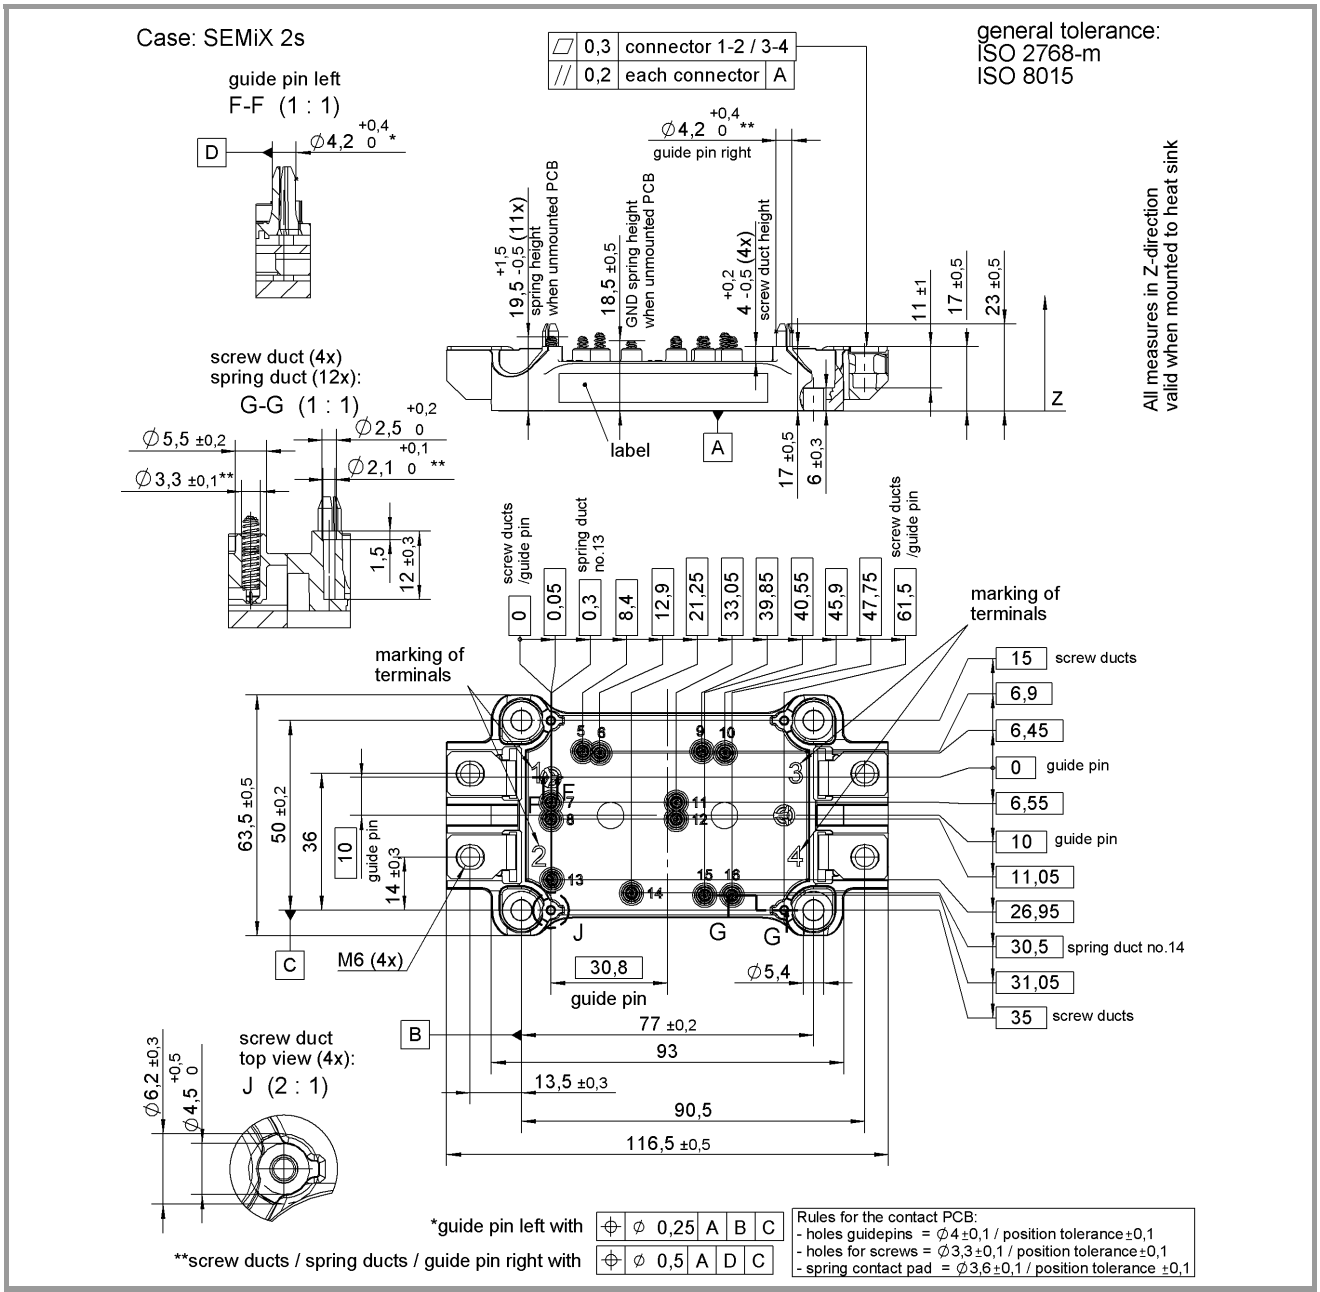

SEMiX 2s

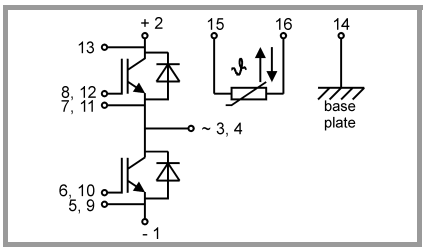

spring configuration

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.

Downloaded from Elcodis.com electronic components distributor