



Rectifier Diode Modules

SKKD 101/16

Features


- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- UL recognized, file no. E63532

Typical Applications*

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors

Absolute Maximum Ratings		Values		Unit	
Symbol	Conditions				
Rectifier Diode					
I_{FAV}	sin. 180°	$T_c = 85 \text{ °C}$	134	A	
		$T_c = 100 \text{ °C}$	101	A	
I_{FSM}	10 ms	$T_j = 25 \text{ °C}$	2500	A	
		$T_j = 130 \text{ °C}$	2000	A	
i^2t	10 ms	$T_j = 25 \text{ °C}$	31250	A^2s	
		$T_j = 130 \text{ °C}$	20000	A^2s	
V_{RSM}			1700	V	
V_{RRM}			1600	V	
T_j			-40 ... 130	$^{\circ}\text{C}$	
Module					
T_{stg}			-40 ... 125	$^{\circ}\text{C}$	
V_{isol}	a.c.; 50 Hz; r.m.s.	1 min	3000	V	
		1 s	3600	V	

Characteristics		min.	typ.	max.	Unit
Symbol	Conditions				
Diode					
V_F	$T_j = 25 \text{ °C}, I_F = 300 \text{ A}$		1.45	1.60	V
$V_{(TO)}$	$T_j = 130 \text{ °C}$		0.75	0.87	V
r_T	$T_j = 130 \text{ °C}$		2.20	2.45	$\text{m}\Omega$
I_{RD}	$T_j = 130 \text{ °C}, V_{RRM}$			3	mA
$R_{th(j-c)}$	cont.	per chip		0.19	K/W
		per module		0.095	K/W
$R_{th(j-c)}$	sin. 180°	per chip		0.2	K/W
		per module		0.1	K/W
Module					
$R_{th(c-s)}$	chip		0.22		K/W
	module		0.11		K/W
M_s	to heatsink M5		4.25	5.75	Nm
M_t	to terminals M5		2.55	3.45	Nm
a				5 * 9,81	m/s^2
w			75		g

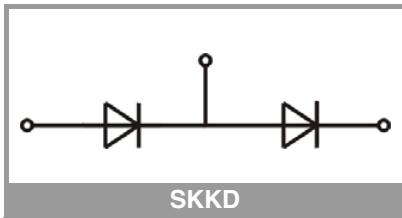

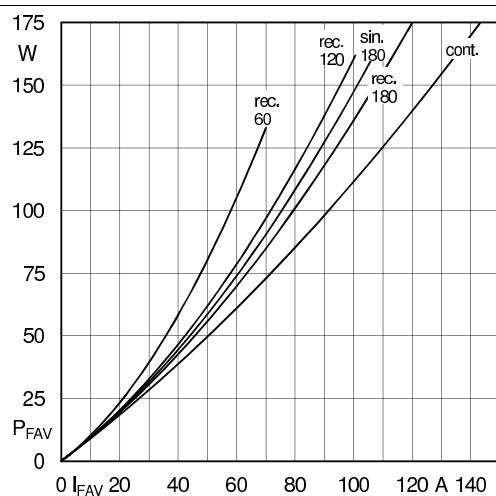


Fig. 11L: Power dissipation per diode vs. forward current

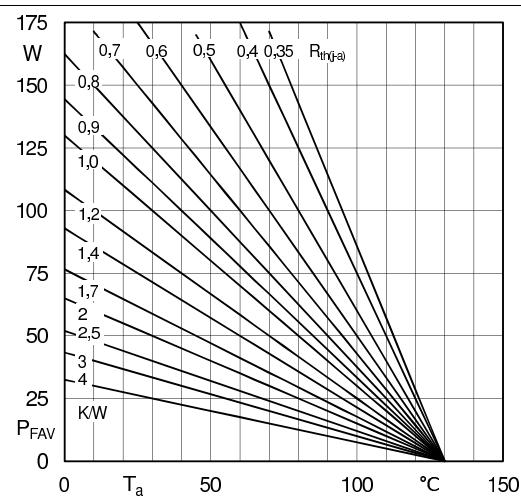


Fig. 11R: Power dissipation per diode vs. ambient temperature

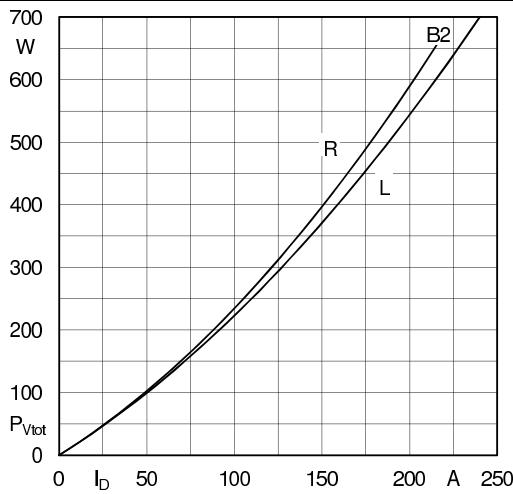


Fig. 12L: Power dissipation of two modules vs. direct current

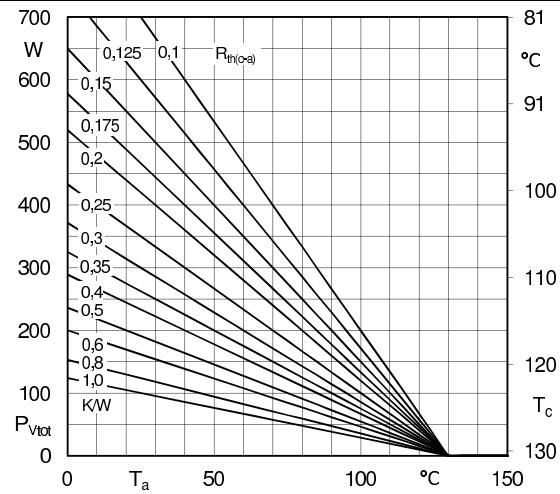


Fig. 12R: Power dissipation of two modules vs. case temperature

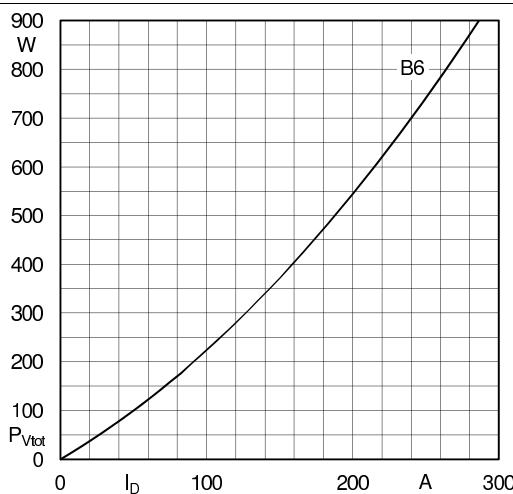


Fig. 13L: Power dissipation of three modules vs. direct current

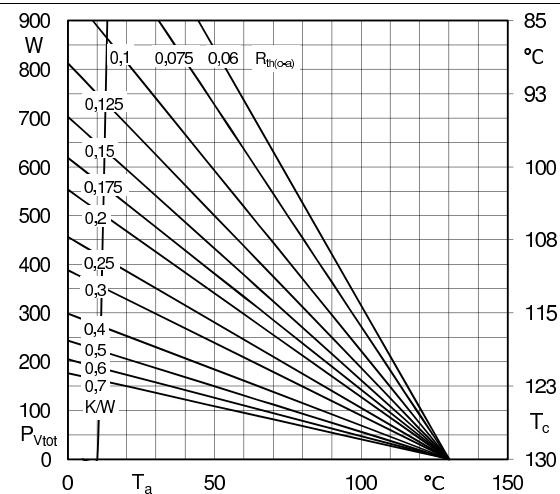


Fig. 13R: Power dissipation of three modules vs. case temperature

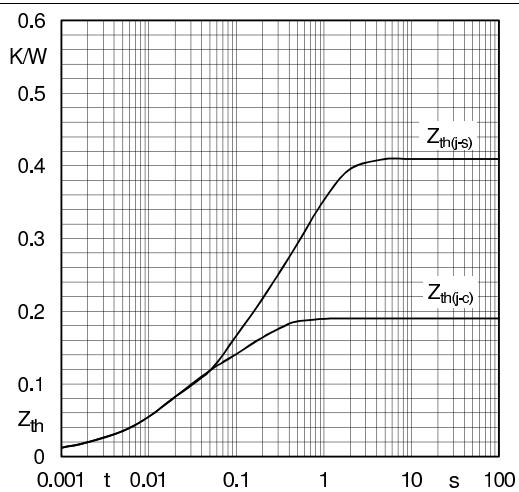


Fig. 14: Transient thermal impedance vs. time

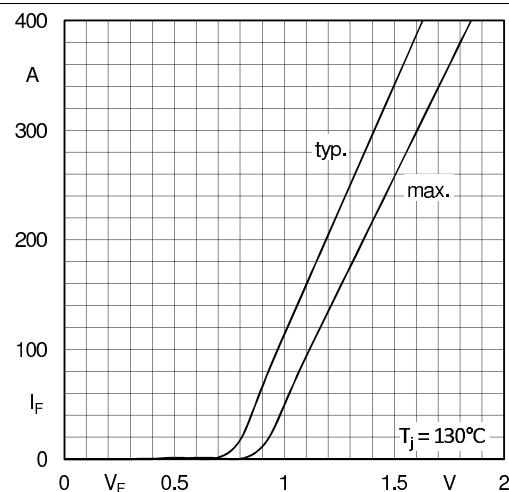


Fig. 15: Forward characteristics



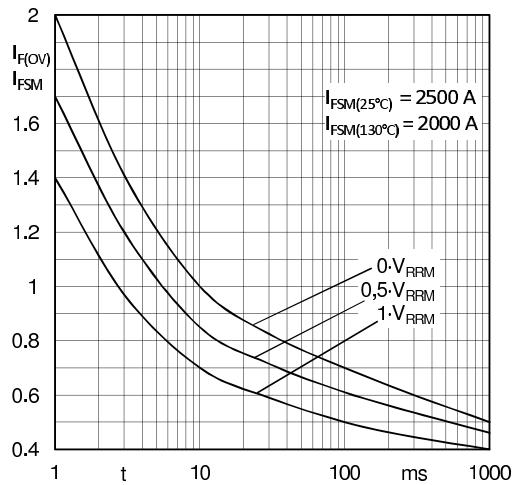


Fig. 16: Surge overload current vs. time

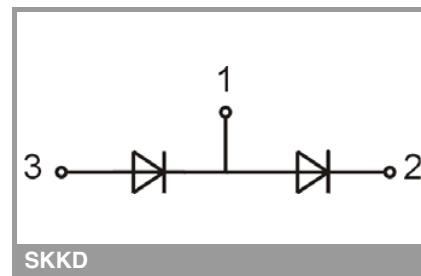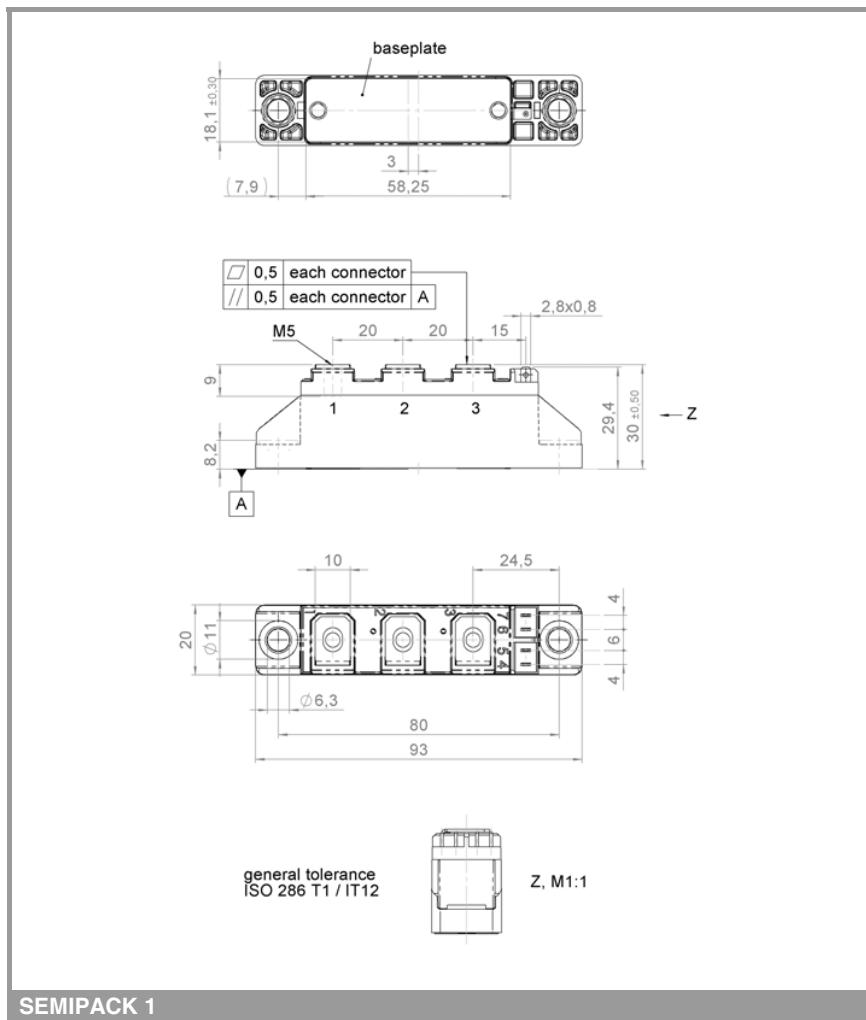

SKKD

SEMIPACK 1

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.