


240 Amp Schottky Rectifier

HS24380 – HS243100

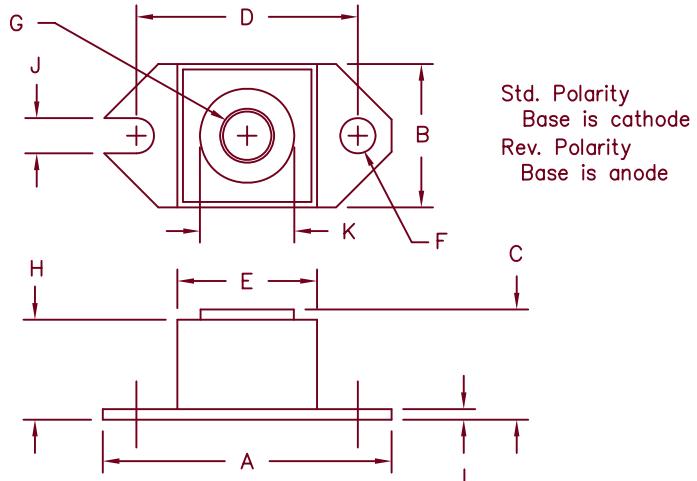

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.52	1.56	38.86	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.182	1.192	30.02	30.28	
E	.745	.755	18.92	19.18	
F	.152	.160	3.86	4.06	Sq. Dia.
G			1/4-20 UNC-2B		
H	.570	.580	14.49	14.73	
J	.156	.160	3.96	4.06	
K	.495	.505	12.57	12.83	Dia.
L	.120	.130	3.05	3.30	

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HS24380*	243NQ080	80V	80V	
HS24390*	MBR24080	90V	90V	
HS243100*	243NQ100 MBR240100	100V	100V	

*Add Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- Guard Ring Protection
- 240 Amperes/80 to 100 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

Average forward current	I _{F(AV)} 240 Amps	T _C = 122°C, Square wave, R _{θJC} = .24°C/W
Maximum surge current	I _{FSM} 3300 Amps	8.3ms, half sine, T _J = 175°C
Maximum repetitive reverse current	I _{R(OV)} 2 Amps	f = 1 KHZ, 25°C
Max peak forward voltage	V _{FM} 0.72 Volts	I _{FM} = 240A: T _J = 175°C*
Max peak forward voltage	V _{FM} 0.86 Volts	I _{FM} = 240A: T _J = 25°C*
Max peak reverse current	I _{RM} 200mA	V _{RRM} , T _J = 125°C*
Max peak reverse current	I _{RM} 8.0mA	V _{RRM} , T _J = 25°C
Typical junction capacitance	C _J 6400pF	V _R = 5.0V, T _C = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-55°C to 175°C
Operating junction temp range	T _J	-55°C to 175°C
Max thermal resistance	R _{θJC}	0.24°C/W Junction to case
Typical thermal resistance (greased)	R _{θCS}	0.12°C/W Case to sink
Terminal Torque		35–40 inch pounds
Mounting Base Torque		20–25 inch pounds
Weight		1.1 ounces (32 grams) typical

SCOTTSDALE
Microsemi

8700 East Thomas Road, P.O. Box 1390
Scottsdale, AZ 85252
PH: (480) 941-6300
FAX: (480) 947-1503
www.microsemi.com

05-11-07 Rev. 3

HS24380 - HS243100

Figure 1
Typical Forward Characteristics

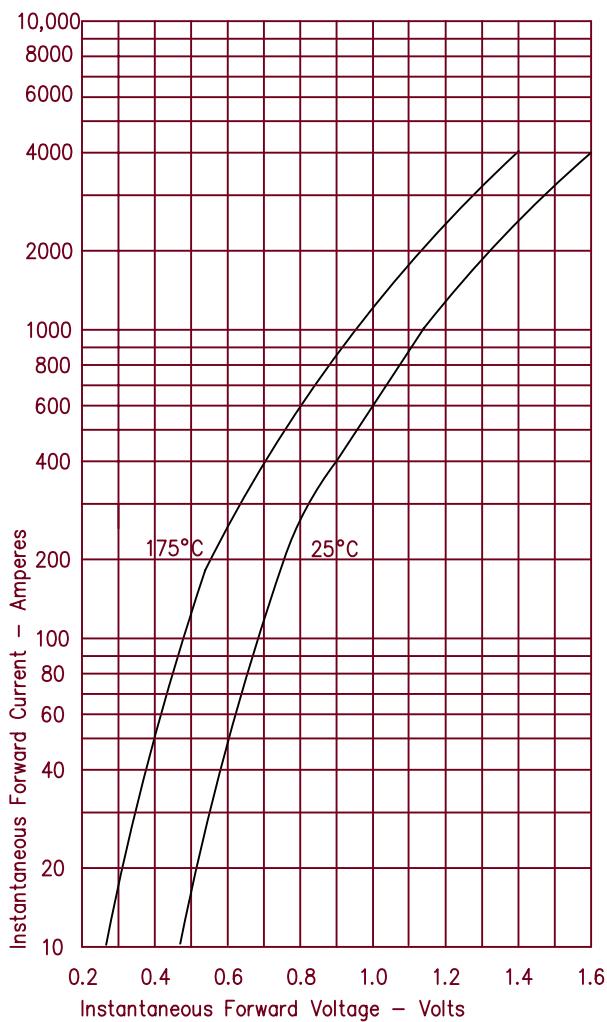


Figure 2
Typical Reverse Characteristics

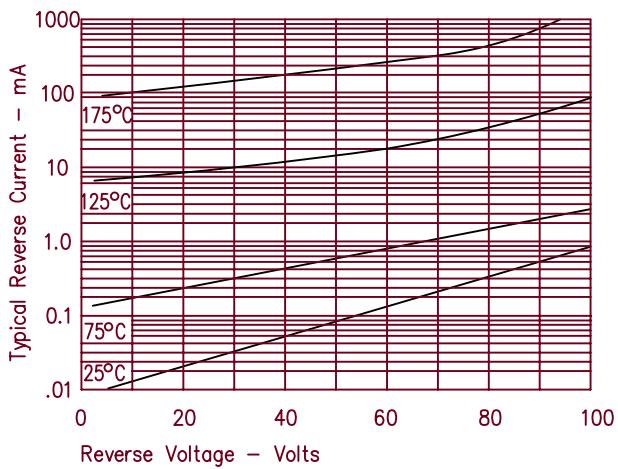


Figure 3
Typical Junction Capacitance

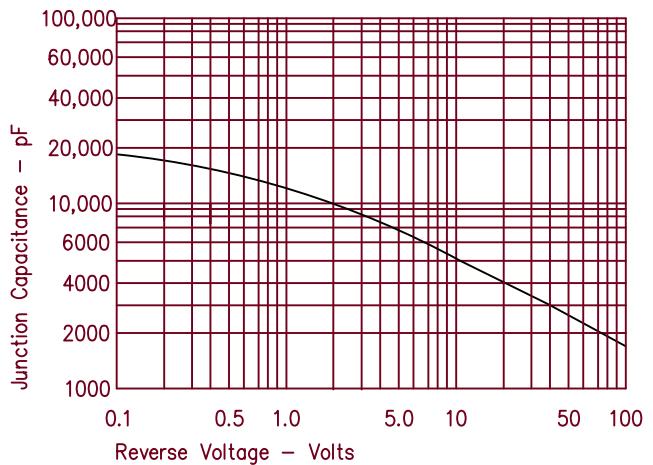


Figure 4
Forward Current Derating

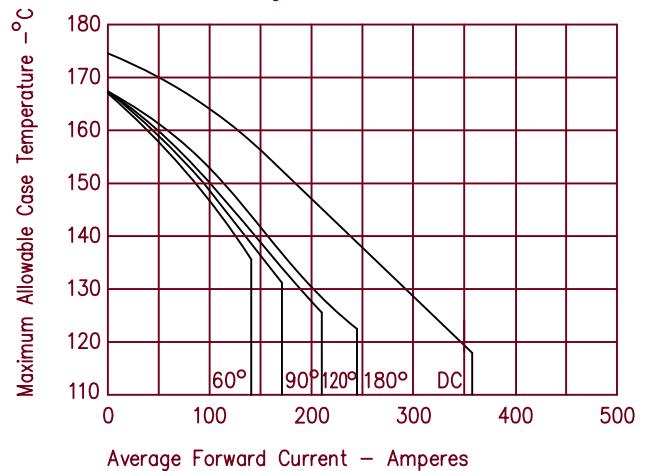


Figure 5
Maximum Forward Power Dissipation

