


Solid-Electrolyte TANTALEX[®] Capacitors, Axial-Leaded, Molded-Case

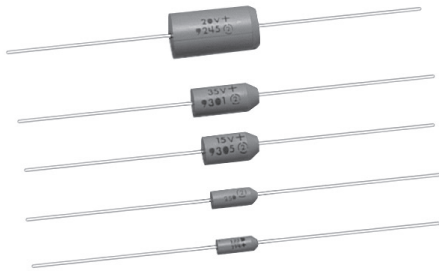

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55°C to + 85°C. (To + 125°C with voltage derating.)

Capacitance Tolerance: At 120 Hz, + 25°C. ± 20%, ±10% standard. ± 5% available as special.

Dissipation Factor: At 120 Hz, + 25°C. Dissipation factor, as determined from the expression $2\pi fRC$, shall not exceed the values listed in the Standard Ratings Tables.

DC Leakage Current (DCL Max.):

At + 25°C: Leakage current shall not exceed the values listed in the Standard Ratings Tables.

At + 85°C: Leakage current shall not exceed 10 times the values listed in the Standard Ratings Tables.

FEATURES

- Miniature axial-lead capacitors available in 5 sizes
- Precision molded in gold colored, flame retardant, thermo-setting epoxy resin
- Laser marked for improved legibility and tapered end of case provides easy identification of positive terminal
- Standard orders are lead taped and reeled; orders under 500 are taped only.

APPLICATIONS

- Designed for high performance automotive, industrial and commercial electronic equipment

At + 125°C: Leakage current shall not exceed 15 times the values listed in the Standard Ratings Tables.

Life Test: Capacitors shall withstand rated DC voltage applied at + 85°C for 2000 hours and for 1000 hours applied at + 125°C derated voltage.


Following the life test:

1. DCL shall not exceed 125% of the initial requirement.
2. Dissipation Factor shall meet the initial requirement.
3. Change in capacitance shall not exceed ± 10%.

ORDERING INFORMATION

| 173D MODEL | 335 CAPACITANCE | X9 CAPACITANCE TOLERANCE | 006 DC VOLTAGE RATING AT + 85°C | U CASE CODE | W PACKAGING |
|---------------|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------|--------------------|
| | This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow. | X0 = ± 20% X9 = ± 10% *X5 = ± 5% *Special order | This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. | See Ratings and Case Codes Table. | W = Tape and reel. |

DIMENSIONS in inches [millimeters]

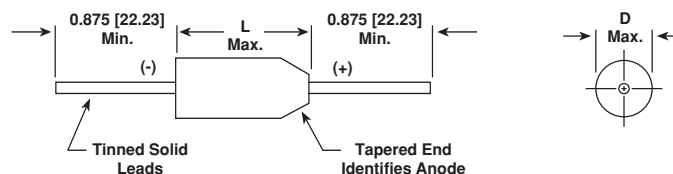

| CASE CODE | D (MAX.) | L (MAX.) | LEAD DIAMETER |
|-----------|--------------|---------------|---------------|
| U | 0.095 [2.41] | 0.260 [6.60] | 0.020 [0.51] |
| V | 0.110 [2.79] | 0.290 [7.37] | 0.020 [0.51] |
| W | 0.180 [4.57] | 0.345 [8.76] | 0.020 [0.51] |
| X | 0.180 [4.57] | 0.420 [10.67] | 0.020 [0.51] |
| Y | 0.280 [7.11] | 0.550 [13.97] | 0.025 [0.64] |

**STANDARD RATINGS**

| CAPACITANCE (μ F) | CASE CODE | PART NUMBER* CAP. TOL. \pm 20% | PART NUMBER* CAP. TOL. \pm 10% | MAX. DCL @ + 25°C (μ A) | MAX. DF @ + 25°C 120 Hz (%) |
|-------------------------------------------------------------------------------|--------------|-------------------------------------|-------------------------------------|------------------------------------|--------------------------------------|
| 2 WVDC @ + 85°C, SURGE = 2.5 V . . . 1.5 WVDC @ + 125°C, SURGE = 1.8 V | | | | | |
| 6.8 | U | 173D685X0002U | 173D685X9002U | 0.5 | 10 |
| 8.2 | U | — | 173D825X9002U | 0.5 | 10 |
| 10.0 | U | 173D106X0002U | 173D106X9002U | 0.5 | 10 |
| 12.0 | V | — | 173D126X9002V | 0.5 | 10 |
| 15.0 | V | 173D156X0002V | 173D156X9002V | 0.5 | 10 |
| 18.0 | V | — | 173D186X9002V | 0.5 | 10 |
| 22.0 | V | 173D226X0002V | 173D226X9002V | 0.5 | 10 |
| 27.0 | V | — | 173D276X9002V | 0.5 | 10 |
| 33.0 | V | 173D336X0002V | 173D336X9002V | 0.5 | 10 |
| 39.0 | W | — | 173D396X9002W | 0.6 | 10 |
| 47.0 | W | 173D476X0002W | 173D476X9002W | 0.8 | 10 |
| 56.0 | W | — | 173D566X9002W | 0.9 | 10 |
| 68.0 | W | 173D686X0002W | 173D686X9002W | 1.1 | 10 |
| 4 WVDC @ + 85°C, SURGE = 5 V . . . 2.5 WVDC @ + 125°C, SURGE = 3 V | | | | | |
| 4.7 | U | 173D475X0004U | 173D475X9004U | 0.5 | 8 |
| 5.6 | U | — | 173D565X9004U | 0.5 | 8 |
| 6.8 | U | 173D685X0004U | 173D685X9004U | 0.5 | 8 |
| 8.2 | V | — | 173D825X9004V | 0.5 | 8 |
| 10.0 | V | 173D106X0004V | 173D106X9004V | 0.5 | 8 |
| 12.0 | V | — | 173D126X9004V | 0.5 | 8 |
| 15.0 | V | 173D156X0004V | 173D156X9004V | 0.5 | 8 |
| 18.0 | V | — | 173D186X9004V | 0.6 | 8 |
| 22.0 | V | 173D226X0004V | 173D226X9004V | 0.7 | 8 |
| 27.0 | W | — | 173D276X9004W | 0.9 | 8 |
| 33.0 | W | 173D336X0004W | 173D336X9004W | 1.1 | 8 |
| 39.0 | W | — | 173D396X9004W | 1.2 | 8 |
| 47.0 | W | 173D476X0004W | 173D476X9004W | 1.5 | 8 |
| 56.0 | X | — | 173D566X9004X | 1.5 | 8 |
| 68.0 | X | 173D686X0004X | 173D686X9004X | 2.2 | 8 |
| 6 WVDC @ + 85°C, SURGE = 8 V . . . 4 WVDC @ + 125°C, SURGE = 5 V | | | | | |
| 3.3 | U | 173D335X0006U | 173D335X9006U | 0.5 | 4 |
| 3.9 | U | — | 173D395X9006U | 0.5 | 4 |
| 4.7 | U | 173D475X0006U | 173D475X9006U | 0.5 | 4 |
| 5.6 | V | — | 173D565X9006V | 0.5 | 4 |
| 6.8 | V | 173D685X0006V | 173D685X9006V | 0.5 | 6 |
| 8.2 | V | — | 173D825X9006V | 0.5 | 6 |
| 10.0 | V | 173D106X0006V | 173D106X9006V | 0.5 | 6 |
| 12.0 | V | — | 173D126X9006V | 0.6 | 6 |
| 15.0 | V | 173D156X0006V | 173D156X9006V | 0.7 | 6 |
| 18.0 | W | — | 173D186X9006W | 0.9 | 6 |
| 22.0 | W | 173D226X0006W | 173D226X9006W | 1.1 | 6 |
| 27.0 | W | — | 173D276X9006W | 1.3 | 6 |
| 33.0 | W | 173D336X0006W | 173D336X9006W | 1.5 | 6 |
| 39.0 | X | — | 173D396X9006X | 1.9 | 6 |
| 47.0 | X | 173D476X9006X | 173D476X9006X | 2.3 | 6 |
| 56.0 | X | — | 173D566X9006X | 2.7 | 6 |
| 68.0 | X | 173D686X0006X | 173D686X9006X | 3.3 | 6 |
| 82.0 | Y | — | 173D826X9006Y | 3.9 | 8 |
| 100.0 | Y | 173D107X0006Y | 173D107X9006Y | 4.8 | 8 |
| 120.0 | Y | — | 173D127X9006Y | 5.0 | 8 |
| 150.0 | Y | 173D157X0006Y | 173D157X9006Y | 5.0 | 8 |
| 180.0 | Y | — | 173D187X9006Y | 8.6 | 8 |
| 220.0 | Y | 173D227X0006Y | 173D227X9006Y | 10.0 | 8 |
| 270.0 | Y | — | 173D277X9006Y | 10.0 | 8 |
| 330.0 | Y | 173D337X0006Y | 173D337X9006Y | 10.0 | 8 |

*Part number should include "X5" for \pm 5% units (special order).



Solid-Electrolyte TANTALEX[®] Capacitors,
Axial-Leaded, Molded-Case

Vishay Sprague

| STANDARD RATINGS | | | | | |
|-----------------------------------------------------------------------------|--------------|-------------------------------------|-------------------------------------|------------------------------------|--------------------------------------|
| CAPACITANCE (μ F) | CASE CODE | PART NUMBER* CAP. TOL. \pm 20% | PART NUMBER* CAP. TOL. \pm 10% | MAX. DCL @ + 25°C (μ A) | MAX. DF @ + 25°C 120 Hz (%) |
| 10 WVDC @ + 85°C, SURGE = 13 V . . . 7 WVDC @ + 125°C, SURGE = 9 V | | | | | |
| 2.2 | U | 173D225X0010U | 173D225X9010U | 0.5 | 4 |
| 2.7 | U | — | 173D275X9010U | 0.5 | 4 |
| 3.3 | U | 173D335X0010U | 173D335X9010U | 0.5 | 4 |
| 3.9 | V | — | 173D395X9010V | 0.5 | 4 |
| 4.7 | V | 173D475X0010V | 173D475X9010V | 0.5 | 4 |
| 5.6 | V | — | 173D565X9010V | 0.5 | 4 |
| 6.8 | V | 173D685X0010V | 173D685X9010V | 0.5 | 6 |
| 8.2 | V | — | 173D825X9010V | 0.7 | 6 |
| 10.0 | V | 173D106X0010V | 173D106X9010V | 0.8 | 6 |
| 12.0 | W | — | 173D126X9010W | 1.0 | 6 |
| 15.0 | W | 173D156X0010W | 173D156X9010W | 1.2 | 6 |
| 18.0 | W | — | 173D186X9010W | 1.4 | 6 |
| 22.0 | W | 173D226X0010W | 173D226X9010W | 1.5 | 6 |
| 27.0 | X | — | 173D276X9010X | 2.2 | 6 |
| 33.0 | X | 173D336X0010X | 173D336X9010X | 2.6 | 6 |
| 39.0 | X | — | 173D396X9010X | 3.1 | 6 |
| 47.0 | X | 173D476X0010X | 173D476X9010X | 3.8 | 6 |
| 56.0 | Y | — | 173D566X9010Y | 4.4 | 6 |
| 68.0 | Y | 173D686X0010Y | 173D686X9010Y | 5.0 | 6 |
| 82.0 | Y | — | 173D826X9010Y | 5.0 | 8 |
| 100.0 | Y | 173D107X0010Y | 173D107X9010Y | 8.0 | 8 |
| 120.0 | Y | — | 173D127X9010Y | 9.6 | 8 |
| 150.0 | Y | 173D157X0010Y | 173D157X9010Y | 10.0 | 8 |
| 180.0 | Y | — | 173D187X9010Y | 10.0 | 8 |
| 220.0 | Y | 173D227X0010Y | 173D227X9010Y | 10.0 | 8 |
| 15 WVDC @ + 85°C, SURGE = 20 V . . . 10 WVDC @ + 125°C, SURGE = 12 V | | | | | |
| 1.5 | U | 173D155X0015U | 173D155X9015U | 0.5 | 4 |
| 1.8 | U | — | 173D185X9015U | 0.5 | 4 |
| 2.2 | U | 173D225X0015U | 173D225X9015U | 0.5 | 4 |
| 2.7 | V | — | 173D275X9015V | 0.5 | 4 |
| 3.3 | V | 173D335X0015V | 173D335X9015V | 0.5 | 4 |
| 3.9 | V | — | 173D395X9015V | 0.5 | 4 |
| 4.7 | V | 173D475X0015V | 173D475X9015V | 0.6 | 4 |
| 5.6 | V | — | 173D565X9015V | 0.7 | 4 |
| 6.8 | V | 173D685X0015V | 173D685X9015V | 0.8 | 6 |
| 8.2 | W | — | 173D825X9015W | 1.0 | 6 |
| 10.0 | W | 173D106X0015W | 173D106X9015W | 1.2 | 6 |
| 12.0 | W | — | 173D126X9015W | 1.4 | 6 |
| 15.0 | W | 173D156X0015W | 173D156X9015W | 1.5 | 6 |
| 18.0 | X | — | 173D186X9015X | 2.2 | 6 |
| 22.0 | X | 173D226X9015X | 173D226X9015X | 2.6 | 6 |
| 27.0 | X | — | 173D276X9015X | 3.2 | 6 |
| 33.0 | X | 173D336X0015X | 173D336X9015X | 4.0 | 6 |
| 39.0 | Y | — | 173D396X9015Y | 4.7 | 6 |
| 47.0 | Y | 173D476X0015Y | 173D476X9015Y | 5.0 | 6 |
| 56.0 | Y | — | 173D566X9015Y | 6.7 | 6 |
| 68.0 | Y | 173D686X0015Y | 173D686X9015Y | 8.2 | 6 |
| 82.0 | Y | — | 173D826X9015Y | 9.8 | 8 |
| 100.0 | Y | 173D107X0015Y | 173D107X9015Y | 10.0 | 8 |
| 120.0 | Y | — | 173D127X9015Y | 10.0 | 8 |
| 150.0 | Y | 173D157X0015Y | 173D157X9015Y | 10.0 | 8 |

*Part number should include "X5" for \pm 5% units (special order).

STANDARD RATINGS

| CAPACITANCE (μ F) | CASE CODE | PART NUMBER* CAP. TOL. \pm 20% | PART NUMBER* CAP. TOL. \pm 10% | MAX. DCL @ + 25°C (μ A) | MAX. DF @ + 25°C 120 Hz (%) |
|-----------------------------------------------------------------------------|--------------|-------------------------------------|-------------------------------------|------------------------------------|--------------------------------------|
| 20 WVDC @ + 85°C, SURGE = 26 V . . . 13 WVDC @ + 125°C, SURGE = 16 V | | | | | |
| 1.0 | U | 173D105X0020U | 173D105X9020U | 0.5 | 4 |
| 1.2 | U | — | 173D125X9020U | 0.5 | 4 |
| 1.5 | U | 173D155X0020U | 173D155X9020U | 0.5 | 4 |
| 1.8 | V | — | 173D185X9020V | 0.5 | 4 |
| 2.2 | V | 173D225X0020V | 173D225X9020V | 0.5 | 4 |
| 2.7 | V | — | 173D275X9020V | 0.5 | 4 |
| 3.3 | V | 173D335X0020V | 173D335X9020V | 0.5 | 4 |
| 3.9 | V | — | 173D395X9020V | 0.6 | 4 |
| 4.7 | V | 173D475X0020V | 173D475X9020V | 0.8 | 4 |
| 5.6 | W | — | 173D565X9020W | 0.9 | 4 |
| 6.8 | W | 173D685X0020W | 173D685X9020W | 1.1 | 6 |
| 8.2 | W | — | 173D825X9020W | 1.3 | 6 |
| 10.0 | W | 173D106X0020W | 173D106X9020W | 1.6 | 6 |
| 12.0 | X | — | 173D126X9020X | 1.9 | 6 |
| 15.0 | X | 173D156X0020X | 173D156X9020X | 2.4 | 6 |
| 18.0 | X | — | 173D186X9020X | 2.9 | 6 |
| 22.0 | X | 173D226X0020X | 173D226X9020X | 3.5 | 6 |
| 27.0 | Y | — | 173D276X9020Y | 4.3 | 6 |
| 33.0 | Y | 173D336X0020Y | 173D336X9020Y | 5.0 | 6 |
| 39.0 | Y | — | 173D396X9020Y | 6.2 | 6 |
| 47.0 | Y | 173D476X0020Y | 173D476X9020Y | 7.5 | 6 |
| 56.0 | Y | — | 173D566X9020Y | 8.9 | 6 |
| 68.0 | Y | 173D686X0020Y | 173D686X9020Y | 10.0 | 6 |
| 82.0 | Y | — | 173D826X9020Y | 10.0 | 6 |
| 100.0 | Y | 173D107X0020Y | 173D107X9020Y | 10.0 | 6 |
| 25 WVDC @ + 85°C, SURGE = 32 V . . . 17 WVDC @ + 125°C, SURGE = 21 V | | | | | |
| 0.47 | U | 173D474X0025U | 173D474X9025U | 0.5 | 3 |
| 0.56 | U | — | 173D564X9025U | 0.5 | 3 |
| 0.68 | U | 173D684X0025U | 173D684X9025U | 0.5 | 3 |
| 0.82 | U | — | 173D824X9025U | 0.5 | 3 |
| 1.0 | U | 173D105X0025U | 173D105X9025U | 0.5 | 3 |
| 1.2 | V | — | 173D125X9025V | 0.5 | 3 |
| 1.5 | V | 173D155X0025V | 173D155X9025V | 0.5 | 3 |
| 1.8 | V | — | 173D185X9025V | 0.5 | 3 |
| 2.2 | V | 173D225X0025V | 173D225X9025V | 0.5 | 3 |
| 2.7 | V | — | 173D275X9025V | 0.5 | 3 |
| 3.3 | V | 173D335X0025V | 173D335X9025V | 0.7 | 3 |
| 3.9 | W | — | 173D395X9025W | 0.8 | 3 |
| 4.7 | W | 173D475X0025W | 173D475X9025W | 0.9 | 4 |
| 5.6 | W | — | 173D565X9025W | 1.1 | 4 |
| 6.8 | W | 173D685X0025W | 173D685X9025W | 1.4 | 4 |
| 8.2 | W | — | 173D825X9025W | 1.5 | 4 |
| 10.0 | W | 173D106X0025W | 173D106X9025W | 1.5 | 4 |
| 12.0 | X | — | 173D126X9025X | 2.4 | 4 |
| 15.0 | X | 173D156X0025X | 173D156X9025X | 3.0 | 4 |
| 18.0 | Y | — | 173D186X9025Y | 3.6 | 6 |
| 22.0 | Y | 173D226X9025Y | 173D226X9025Y | 4.4 | 6 |
| 27.0 | Y | — | 173D276X9025Y | 5.4 | 6 |
| 33.0 | Y | 173D336X0025Y | 173D336X9025Y | 6.6 | 6 |
| 39.0 | Y | — | 173D396X9025Y | 7.8 | 6 |
| 47.0 | Y | 173D476X0025Y | 173D476X9025Y | 9.4 | 6 |

*Part number should include "X5" for \pm 5% units (special order).




Solid-Electrolyte TANTALEX[®] Capacitors,
Axial-Leaded, Molded-Case

Vishay Sprague

| STANDARD RATINGS | | | | | | |
|-----------------------------------------------------------------------------|--------------|-------------------------------------|-------------------------------------|------------------------------------|--------------------------------------|--|
| CAPACITANCE (μ F) | CASE CODE | PART NUMBER* CAP. TOL. \pm 20% | PART NUMBER* CAP. TOL. \pm 10% | MAX. DCL @ + 25°C (μ A) | MAX. DF @ + 25°C 120 Hz (%) | |
| 35 WVDC @ + 85°C, SURGE = 46 V . . . 23 WVDC @ + 125°C, SURGE = 28 V | | | | | | |
| 0.10 | U | 173D104X0035U | 173D104X9035U | 0.5 | 3 | |
| 0.12 | U | — | 173D124X9035U | 0.5 | 3 | |
| 0.15 | U | 173D154X0035U | 173D154X9035U | 0.5 | 3 | |
| 0.18 | U | — | 173D184X9035U | 0.5 | 3 | |
| 0.22 | U | 173D224X0035U | 173D224X9035U | 0.5 | 3 | |
| 0.27 | U | — | 173D274X9035U | 0.5 | 3 | |
| 0.33 | U | 173D334X0035U | 173D334X9035U | 0.5 | 3 | |
| 0.39 | U | — | 173D394X9035U | 0.5 | 3 | |
| 0.47 | U | 173D474X0035U | 173D474X9035U | 0.5 | 3 | |
| 0.56 | V | — | 173D564X9035V | 0.5 | 3 | |
| 0.68 | V | 173D684X0035V | 173D684X9035V | 0.5 | 3 | |
| 0.82 | V | — | 173D824X9035V | 0.5 | 3 | |
| 1.0 | V | 173D105X0035V | 173D105X9035V | 0.5 | 3 | |
| 1.2 | V | — | 173D125X9035V | 0.5 | 3 | |
| 1.5 | V | 173D155X0035V | 173D155X9035V | 0.5 | 3 | |
| 1.8 | W | — | 173D185X9035W | 0.5 | 3 | |
| 2.2 | W | 173D225X0035V | 173D225X9035V | 0.6 | 3 | |
| 2.7 | W | — | 173D275X9035W | 0.8 | 3 | |
| 3.3 | W | 173D335X0035W | 173D335X9035W | 0.9 | 4 | |
| 3.9 | W | — | 173D395X9035W | 1.1 | 4 | |
| 4.7 | W | 173D475X0035W | 173D475X9035W | 1.3 | 4 | |
| 5.6 | X | — | 173D565X9035X | 1.6 | 4 | |
| 6.8 | X | 173D685X0035X | 173D685X9035X | 1.9 | 4 | |
| 8.2 | X | — | 173D825X9035X | 2.3 | 4 | |
| 10.0 | X | 173D106X0035X | 173D106X9035X | 2.8 | 4 | |
| 35 WVDC @ + 85°C, SURGE = 46 V . . . 23 WVDC @ + 125°C, SURGE = 28 V | | | | | | |
| 12.0 | Y | — | 173D126X9035Y | 3.3 | 4 | |
| 15.0 | Y | 173D156X0035Y | 173D156X9035Y | 4.2 | 6 | |
| 18.0 | Y | — | 173D186X9035Y | 5.0 | 6 | |
| 22.0 | Y | 173D226X0035Y | 173D226X9035Y | 6.2 | 6 | |
| 27.0 | Y | — | 173D276X9035Y | 7.5 | 6 | |
| 33.0 | Y | 173D336X0035Y | 173D336X9035Y | 9.2 | 6 | |
| 39.0 | Y | — | 173D396X9035Y | 10.0 | 6 | |
| 47.0 | Y | 173D476X0035Y | 173D476X9035Y | 10.0 | 6 | |
| 50 WVDC @ + 85°C, SURGE = 65 V . . . 33 WVDC @ + 125°C, SURGE = 40 V | | | | | | |
| 0.10 | U | 173D104X0050U | 173D104X9050U | 0.5 | 3 | |
| 0.12 | U | — | 173D124X9050U | 0.5 | 3 | |
| 0.15 | U | 173D154X0050U | 173D154X9050U | 0.5 | 3 | |
| 0.18 | U | — | 173D184X9050U | 0.5 | 3 | |
| 0.22 | U | 173D224X0050U | 173D224X9050U | 0.5 | 3 | |
| 0.27 | U | — | 173D274X9050U | 0.5 | 3 | |
| 0.33 | V | 173D334X0050V | 173D334X9050V | 0.5 | 3 | |
| 0.39 | V | — | 173D394X9050V | 0.5 | 3 | |
| 0.47 | V | 173D474X0050V | 173D474X9050V | 0.5 | 3 | |
| 0.56 | V | — | 173D564X9050V | 0.5 | 3 | |
| 0.68 | V | 173D684X0050V | 173D684X9050V | 0.5 | 3 | |
| 0.82 | V | — | 173D824X9050V | 0.5 | 3 | |
| 1.0 | V | 173D105X0050V | 173D105X9050V | 0.5 | 3 | |
| 1.2 | W | — | 173D125X9050W | 0.5 | 3 | |
| 1.5 | W | 173D155X0050W | 173D155X9050W | 0.6 | 4 | |
| 1.8 | W | — | 173D185X9050W | 0.7 | 4 | |
| 2.2 | W | 173D225X0050W | 173D225X9050W | 0.9 | 4 | |
| 2.7 | X | — | 173D275X9050X | 1.1 | 4 | |
| 3.3 | X | 173D335X0050X | 173D335X9050X | 1.3 | 4 | |
| 3.9 | X | — | 173D395X9050X | 1.6 | 4 | |
| 4.7 | X | 173D475X0050X | 173D475X9050X | 1.9 | 4 | |
| 5.6 | Y | — | 173D565X9050Y | 2.2 | 4 | |
| 6.8 | Y | 173D685X0050Y | 173D685X9050Y | 2.7 | 4 | |
| 8.2 | Y | — | 173D825X9050Y | 3.2 | 4 | |
| 10.0 | Y | 173D106X0050Y | 173D106X9050Y | 4.0 | 6 | |
| 12.0 | Y | — | 173D126X9050Y | 5.0 | 6 | |
| 15.0 | Y | 173D156X0050Y | 173D156X9050Y | 6.0 | 6 | |
| 18.0 | Y | — | 173D186X9050Y | 6.0 | 6 | |

*Part number should include "X5" for \pm 5% units (special order).

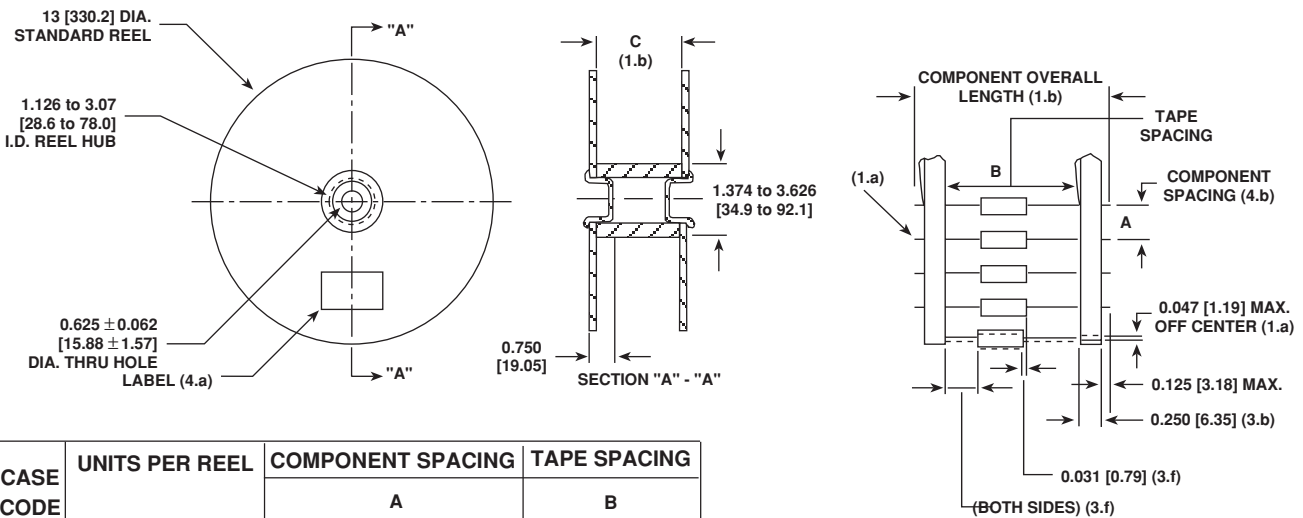TAPE AND REEL PACKAGING in inches [millimeters]**STANDARD REEL PACKAGING INFORMATION****1. Component Leads:**

- Component leads shall not be bent beyond 0.047" [1.19mm] maximum from their nominal position when measured from the leading edge of the component lead at the inside tape edge and at the lead egress from the component.
- The 'C' dimension shall be governed by the overall length of the reel packaged component. The distance between flanges shall be 0.125" to 0.250" [3.18mm to 6.35mm] greater than the overall component length.

2. Orientation:

- All polarized components must be oriented to one direction. The cathode lead tape shall be a color and the anode lead tape shall be white.

3. Reeling:

- Components on any reel shall not represent more than two date codes when date code identification is required.
- Component leads shall be positioned between pairs of 0.250" [6.35mm] tape.
- The disposable reels have hubs with corrugated fiber board flanges and core.
- A minimum of 12" [304.8mm] leader of tape shall be provided before the first and after the last component on the reel.
- 50 to 60 lb. Kraft paper must be wound between layers of components as far as necessary for component protection. Width of paper to be 0.062" to 0.250" [1.57mm to 6.35mm] less than the 'C' dimension of the reel.

- Row components must be centered between tapes ± 0.047" [1.19mm]. In addition, individual components may deviate from center of component row ± 0.031" [0.79].
- Staples shall not be used for splicing. Not more than 4 layers of tape shall be used in any splice area and no tape shall be offset from another by more than 0.031" [0.79mm] non-cumulative. Tape splices shall overlap at least 6" [152.4mm] for butt joints and at least 3" [76.2mm] for lap joints and shall not be weaker than unspliced tape. Universal splicing clips may also be used.
- Quantity per reel shall be controlled so that tape components and cover shall not extend beyond the smallest dimension of the flange (either across flats or diameter). Once the quantity per reel for each part number has been established, future orders for that part number shall be packaged in that quantity. When order release quantity is less than the established quantity, a standard commercial pack is to be used.
- A maximum of 0.25% of the components per reel quantity may be missing without consecutive missing components.
- Adequate protection must be provided to prevent physical damage to both reel and components during shipment and storage.

4. Marking:

- Minimum reel and carton marking shall consist of the following: Customer Part Number, Purchase Order No., Quantity, Package Date, Manufacturer's name, Electrical Value, Date Code, Vishay Sprague Part Number and Country of Origin.