

[查询"2743019447"供应商](#)


Products

▼ Technical

▼ About Us

▼ Contact Us

Catalog Part Search:

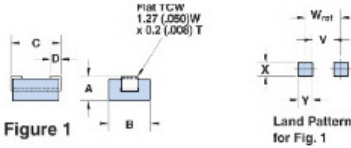

Part Number: 2743019447
 Frequency Range: Broadband Frequencies 25-300 MHz (43 & 44 materials)
 Description: BDS2.9/3.1/4.7-43-1 43 SM BEAD
 Application: Suppression Components
 Where Used: Board Component
 Part Type: SM Beads (Differential-Mode)
 Preferred Part: ✓

Part Type Information

Mechanical Specifications

Weight: 0.15 (g)

[View Chart Legend](#)

Dim	mm	mm tol	nominal inch	inch misc.
A	2.85	±0.20	0.112	-
B	3.05	±0.10	0.120	-
C	5.10	-0.85	0.184	-
D	1.50	±0.50	0.059	-
E	-	-	-	-
F	-	-	-	-
G	-	-	-	-
H	-	-	-	-
J	-	-	-	-
K	-	-	-	-

Land Patterns				
V	W (ref)	X	Y	Z
1.000 0.040	4.000 0.157	1.800 0.071	3.000 0.118	-

Winding Information			
Turns Tested	Wire Size	1st Wire Length	2
-	-	-	-

Reel Information				
Tape Width mm	Pitch mm	Parts 7" Reel	Parts 13" Reel	Parts 14" Reel
12	8	-	2800	-

Pkg Size	
-	-

Connector Plate	
# Holes	# Ro
-	-

Cable Information			
Max Diameter	Max Dimension	Solid Equivalent	Flat Ca Core
-	-	-	-

Electrical Specifications

Typical Impedance (Ω)	
10 MHz	18
25 MHz ⁺	29
100 MHz ⁺	47
250 MHz	49

Electrical Properties	
Max Rdc(mΩ)	.80

43 Material Specifications:

Property	Unit	Symbol	Value
Initial Permeability @ B < 10 gauss		μ _i	800
Flux Density @ Field Strength	gauss oersted	B H	2900 10
Residual Flux Density	gauss	B _r	1300
Coercive Force	oersted	H _c	0.45
Loss Factor @ Frequency	10 ⁻⁶ MHz	tan δ/μ _i	250 1.0
Temperature Coefficient of Initial Permeability (20 -70°C)	%/°C		1.25
Curie Temperature	°C	T _c	>130
Resistivity	Ω cm	ρ	1x10 ⁵

Ferrite Material Constants

Specific Heat	0.25 cal/g
Thermal Conductivity	10x10 ⁻³ ca
Coefficient of Linear Expansion	8 - 10x10 ⁻⁴
Tensile Strength	4.9 kgf/mm
Compressive Strength	42 kgf/mm
Young's Modulus	15x10 ³ kg
Hardness (Knoop)	650
Specific Gravity	≈ 4.7 g/cm

The above quoted properties are typical for Fair-Rite MnZn and I