

## Data Sheet


# Chip Monolithic Ceramic Capacitors

## Safety Standard Certified Type GC (UL, IEC60384-14 Class X1/Y2)

### GA355DR7GC472KY02L (2220, X7R, 4700pF, AC250V(r.m.s.))

● For your new designs, alternative parts should be used. These parts should be used only for existing design. Please consult with us for details.

RoHS regulation conformity parts

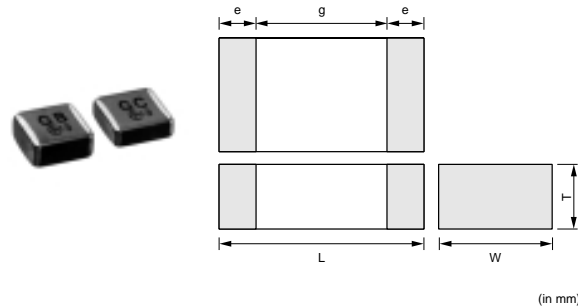

#### ■ Dimensions

|                    |             |
|--------------------|-------------|
| Length L           | 5.7mm±0.4mm |
| Width W            | 5.0mm±0.4mm |
| Thickness T        | 2.0mm±0.3mm |
| Electrode e        | 0.3mm min.  |
| Electrode g (min.) | 4.0mm       |

#### ■ Rated Value

|                   | Murata PN Code | Spec            |
|-------------------|----------------|-----------------|
| Temperature Char. | <b>R7</b>      | X7R (EIA), ±15% |
| Capacitance       | <b>472</b>     | 4700pF          |
| Capacitance Tol.  | <b>K</b>       | ±10%            |
| Rated Voltage     | <b>GC</b>      | AC250V(r.m.s.)  |

#### ■ Packaging

| Code     | Packaging           | Minimum Quantity |
|----------|---------------------|------------------|
| <b>L</b> | 180mm Embossed Tape | 1000             |

#### ■ Specifications

Please refer to  
'Safety Standard Certified Type GC/GD/GF/GB  
Specifications and Test Methods'  
PDF file.

#### ■ Standard Certification

|       | Standard No.                                   | Class        | Rated Voltage      |
|-------|--|--------------|--------------------|
| UL    | UL1414   | Line By-pass | AC250V<br>(r.m.s.) |
| VDE   | IEC 60384-14<br>EN 60384-14                    | X1, Y2       |                    |
| BSI   | EN 60065 (14.2)<br>IEC 60384-14<br>EN 60384-14 |              |                    |
| SEMKO | IEC 60384-14<br>EN 60384-14                    |              |                    |
| ESTI  | EN 60065<br>IEC 60384-14                       |              |                    |

● This data sheet is applied to SAFETY STANDARD CERTIFIED CHIP MONOLITHIC CERAMIC CAPACITOR Type GC for your design.

#### <Notice>

- Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.
- Please refer to 'Caution' and 'Notice' for the other details.

- The RoHS compliance means that we judge from EU Directive 2002/95/EC the products do not contain lead, cadmium, mercury, hexavalent chromium, PBB and PBDE, except exemptions stated in EU Directive 2002/95/EC annex and impurities existing in natural world.
- This statement does not insure the compliance of any of the listed parts with any laws or legal imperatives developed by any EU members individually with regards to the RoHS Directive.

#### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.