



PX Long Life Assurance
series

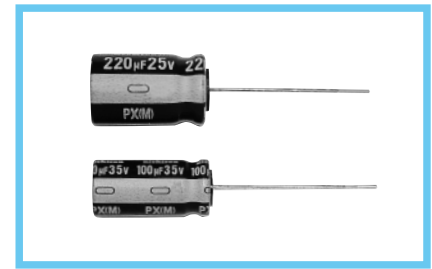


- Load life of 20000 hours at 105°C.
- Adapted to the RoHS directive (2002/95/EC).



Specifications


Item	Performance Characteristics						
Category Temperature Range	-55 ~ +105°C						
Rated Voltage Range	10 ~ 35V						
Rated Capacitance Range	1 ~ 4700μF						
Capacitance Tolerance	±20% (120Hz, 20°C)						
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.						
tan δ	Rated voltage (V)	10	16	25	35	Measurement frequency : 120Hz Temperature : 20°C	
	tan δ (MAX)	0.20	0.16	0.14	0.12		
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.						
Stability at Low Temperature	Rated voltage (V)	10	16	25	35	Measurement frequency : 120Hz	
	Impedance ratio (MAX.)	Z-25°C / Z+20°C	3	2	2		2
		Z-40°C / Z+20°C	4	4	4		4
Endurance	After an application of D.C. bias voltage plus the rated ripple current for 20000 hours at 105°C, the peak voltage shall not exceed the rated D.C. voltage, capacitor meet the characteristic requirements listed below.						
	Capacitance change	Within ±30% of initial value					
	tan δ	300% or less of initial specified value					
	Leakage current	Initial specified value or less					
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.						
Marking	Printed with white color letter on dark brown sleeve.						

Radial Lead Type

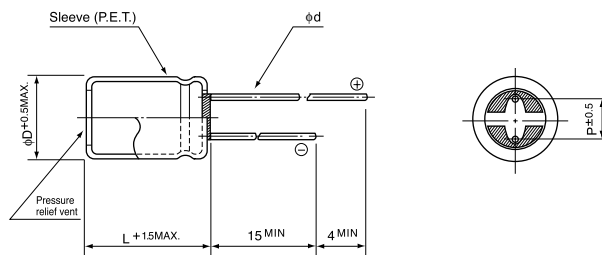

	(mm)			
φD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.8	0.8

Type numbering system (Example : 16V 220μF)

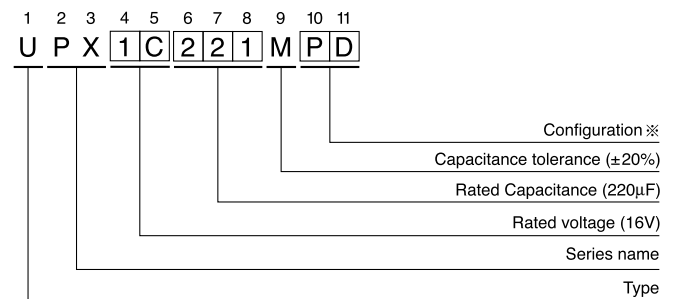

※Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
10	PD
12.5 ~ 18	HD

- Please refer to page 21 about the end seal configuration.

Please refer to page 21, 22, 23 about the formed or taped product spec.
Please refer to page 3 for the minimum order quantity.

- Dimension table in next page.

■ Dimensions

Cap. (μ F)	V (Code)	Item Code	10 (1A)		16 (1C)		25 (1E)		35 (1V)	
			Case size ϕ D \times L (mm)	Rated Ripple (mA _{RMS}) 105°C / 100kHz	Case size ϕ D \times L (mm)	Rated Ripple (mA _{RMS}) 105°C / 100kHz	Case size ϕ D \times L (mm)	Rated Ripple (mA _{RMS}) 105°C / 100kHz	Case size ϕ D \times L (mm)	Rated Ripple (mA _{RMS}) 105°C / 100kHz
1	010								10 \times 12.5	59
2.2	2R2								10 \times 12.5	84
3.3	3R3								10 \times 12.5	101
4.7	4R7								10 \times 12.5	143
10	100								10 \times 12.5	294
22	220								10 \times 12.5	336
33	330								10 \times 12.5	378
47	470								10 \times 12.5	420
100	101					10 \times 12.5	420		10 \times 20	672
220	221			10 \times 16	504	12.5 \times 20	840		12.5 \times 25	1008
330	331	10 \times 16	504	10 \times 20	672	12.5 \times 25	1008		16 \times 25	1344
470	471	10 \times 20	672	12.5 \times 20	1008	16 \times 25	1344		16 \times 31.5	1680
1000	102	12.5 \times 25	1008	16 \times 25	1344	16 \times 31.5	1680		18 \times 40	2184
2200	222	16 \times 31.5	1680	18 \times 35.5	2016					
3300	332	18 \times 35.5	2016	18 \times 40	2184					
4700	472	18 \times 40	2184							

• Frequency coefficient of rated ripple current

Frequency	120Hz	1kHz	10kHz	100kHz ~
Coefficient	0.75	0.8	0.9	1.0