

## Metal Film Resistors, Military, MIL-R-10509 Qualified, Precision, Type RN and MIL-PRF-22684 Qualified, Type RL



### FEATURES

- Very low noise (- 40 dB)
- Very low voltage coefficient (5 ppm/V)
- Controlled temperature coefficient
- Flame retardant epoxy coating
- Commercial alternatives to military styles are available with higher power ratings. See appropriate catalog or web page.

STANDARD ELECTRICAL SPECIFICATIONS											
VISHAY DALE MODEL	MIL STYLE	MIL SPEC. SHEET	POWER RATING		TOLERANCE ± %	MAX. WORKING VOLTAGE <sup>(1)</sup> V	RESISTANCE RANGE Ω				DIELECTRIC STRENGTH V <sub>Ac</sub>
			P <sub>70 °C</sub> W	P <sub>125 °C</sub> W			MIL-R-10509			MIL-PRF-22684	
							± 100 ppm/°C (D)	± 50 ppm/°C (C)	± 25 ppm/°C (E)		
CMF50	RN50	08	-	0.05	0.1, 0.25, 0.5, 1	200	-	10 to 100K	10 to 100K	-	450
CMF55	RN55	07	0.125	0.10	0.1, 0.25, 0.5, 1	200	10 to 301K	49.9 to 100K	49.9 to 100K	-	450
CMF60	RN60	01	0.25	0.125	0.1, 0.25, 0.5, 1	300	10 to 1M	49.9 to 499K	49.9 to 499K	-	500
CMF65	RN65	02	0.50	0.25	0.1, 0.25, 0.5, 1	350	10 to 2M	49.9 to 1M	49.9 to 1M	-	900
CMF70	RN70	03	0.75 <sup>(2)</sup>	0.50	0.1, 0.25, 0.5, 1	500	10 to 2.49M	24.9 to 1M	24.9 to 1M	-	900
CMF07	RL07	01	0.25	-	2, 5	250	-	-	-	51 to 150K	450
CMF20	RL20	02	0.50	-	2, 5	350	-	-	-	4.3 to 470K	700

### Notes

<sup>(1)</sup> Continuous working voltage shall be  $\sqrt{P \times R}$  or maximum working voltage, whichever is less.

<sup>(2)</sup> Formerly rated at 1 W and is the direct replacement for RN70 of MIL-R-10509 Rev. D.

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	CONDITION
Voltage Coefficient	ppm/V	5 when measured between 10 % and full rated voltage
Insulation Resistance	Ω	≥ 10 <sup>10</sup> min. dry; ≥ 10 <sup>8</sup> min. after moisture test
Operating Temperature Range	°C	- 65/+ 175 (see derating curves for military range)
Terminal Strength	lb	5 pound pull test for RL07/RL20; 2 pound pull test for all others
Solderability		Continuous satisfactory coverage when tested in accordance with MIL-R-10509 and MIL-PRF-22684




# CMF (Military RN and RL)

Metal Film Resistors, Military, MIL-R-10509 Qualified,  
Precision, Type RN and MIL-PRF-22684 Qualified, Type RL


Vishay Dale

## GLOBAL PART NUMBER INFORMATION


New Global Part Numbering: RN60D3483FR36 (preferred part numbering format)

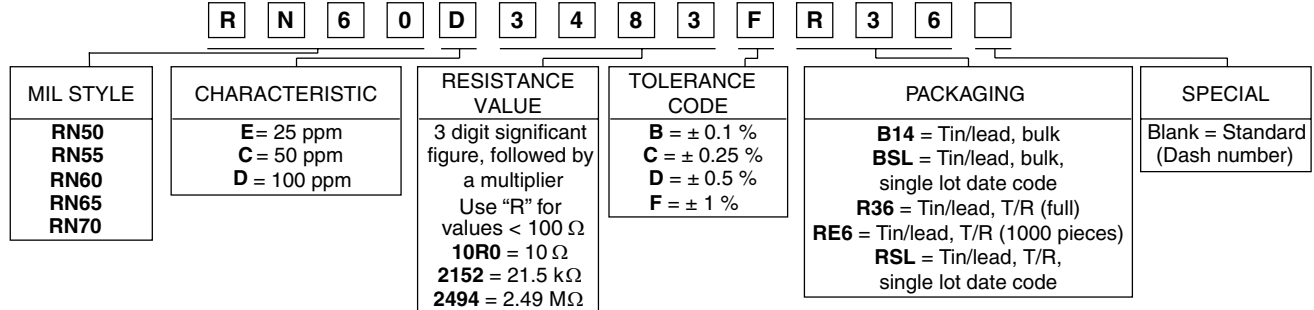


Historical Part Number example: RN60D3483F (will continue to be accepted)



New Global Part Numbering: RL07S471JR36 (preferred part numbering format)

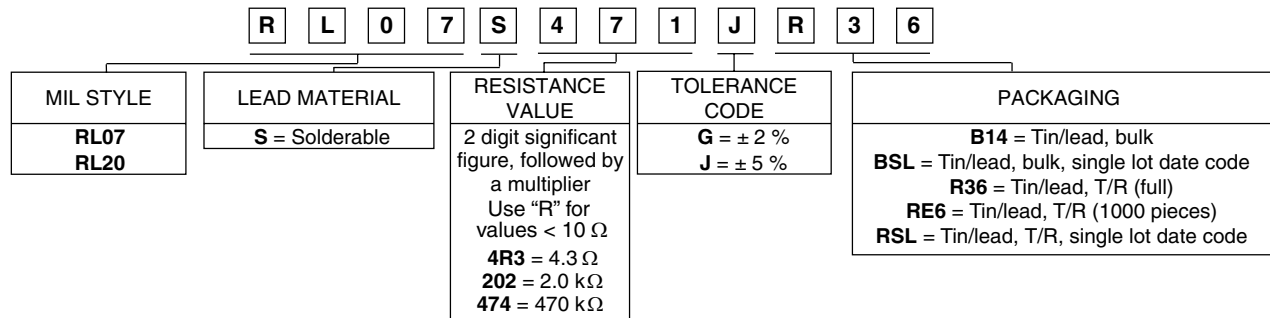

Historical Part Number example: RL07S471J (will continue to be accepted)



## MATERIAL SPECIFICATIONS

<b>Element</b>	Nickel-chrome alloy
<b>Coating</b>	Flame retardant epoxy, formulated for superior moisture protection
<b>Core</b>	Fire-cleaned high purity ceramic
<b>Termination</b>	Standard lead material is solder-coated copper. Solderable and weldable.

## APPLICABLE MIL-SPECS

**MIL-R-10509 and MIL-PRF-22684:** The CMF models meet or exceed the electrical, environmental and dimensional requirements of MIL-R-10509 and MIL-PRF-22684.

**Noise:** Vishay Dale metal film resistors have exceptionally low noise level. Average for standard resistance range is 0.10 μV per V over a decade of frequency, with low and intermediate resistance values typically below 0.05 μV per V.

**CAGE CODE: 91637**

## ENVIRONMENTAL SPECIFICATIONS

<b>General</b>	Environmental performance is shown in the Environmental Performance table. Test methods are those specified in MIL-R-10509 and MIL-PRF-22684.
<b>Shelf Life</b>	Resistance shifts due to storage at room temperature are negligible.


# CMF (Military RN and RL)




Vishay Dale

Metal Film Resistors, Military, MIL-R-10509 Qualified,  
Precision, Type RN and MIL-PRF-22684 Qualified, Type RL

Vishay Dale CMF resistors have an operating temperature range of - 65 °C to + 175 °C. They must be derated according to the following curves:

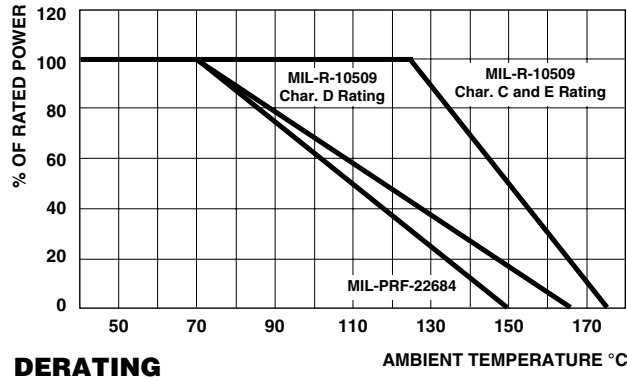

## DIMENSIONS in inches (millimeters)

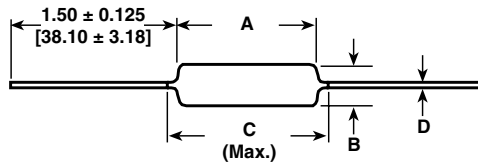

VISHAY DALE MODEL	A	B	C (Max.)	D
CMF50	0.150 ± 0.020 (3.81 ± 0.51)	0.065 ± 0.015 (1.65 ± 0.38)	0.244 (6.20)	0.016 ± 0.002 (0.41 ± 0.05)
CMF55	0.240 ± 0.020 (6.10 ± 0.51)	0.090 ± 0.008 (2.29 ± 0.20)	0.278 (7.06) <sup>(1)</sup>	0.025 ± 0.002 (0.64 ± 0.05)
CMF60	0.344 ± 0.031 (8.74 ± 0.79)	0.145 ± 0.015 (3.68 ± 0.38)	0.425 (10.80)	0.025 ± 0.002 (0.64 ± 0.05)
CMF65	0.562 ± 0.031 (14.27 ± 0.79)	0.180 ± 0.015 (4.57 ± 0.38)	0.687 (17.45)	0.025 ± 0.002 (0.64 ± 0.05)
CMF70	0.562 ± 0.031 (14.27 ± 0.79)	0.180 ± 0.015 (4.57 ± 0.38)	0.687 (17.45)	0.032 ± 0.002 (0.81 ± 0.05)
CMF07	0.240 ± 0.020 (6.10 ± 0.51)	0.090 ± 0.008 (2.29 ± 0.20)	0.278 (7.06)	0.025 ± 0.002 (0.64 ± 0.05)
CMF20	0.375 ± 0.040 (9.53 ± 1.02)	0.145 ± 0.015 (3.68 ± 0.38)	0.425 (10.80)	0.032 ± 0.002 (0.81 ± 0.05)

### Note

<sup>(1)</sup> 0.290" (7.37) for ± 0.25 % and ± 0.1 % resistance tolerances

MILITARY POWER RATING			
WATTAGE	MILITARY QUALIFIED		
	MIL-R-10509		MIL-PRF-22684
	AT + 70 °C (D)	AT + 125 °C (C and E)	AT + 70 °C
0.05	-	RN50	-
0.10	-	RN55	-
0.125	RN55	RN60	-
0.25	RN60	RN65	RL07
0.50	RN65	RN70	RL20
0.75 <sup>(1)</sup>	RN70	-	-

### Notes

• Commercial equivalents of military styles are available with higher power ratings. Consult factory.


<sup>(1)</sup> Formerly rated at 1 W and is the direct replacement for RN70 of MIL-R-10509 Rev. D.



# CMF (Military RN and RL)

Metal Film Resistors, Military, MIL-R-10509 Qualified,  
Precision, Type RN and MIL-PRF-22684 Qualified, Type RL

Vishay Dale

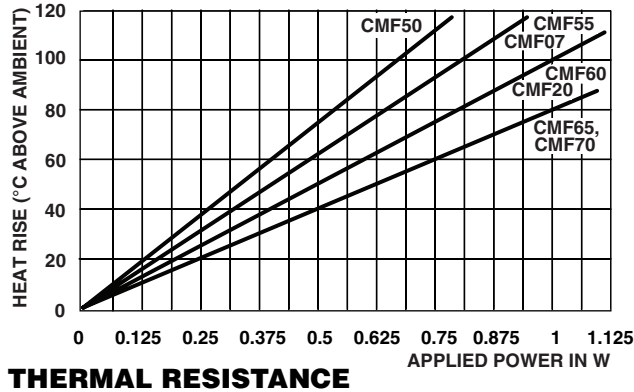

MARKING	
RN50: (3 lines) J50D JAN, type, characteristic 1211 Value F137 Tolerance and 3 digit date code	Characteristics: D = 100 ppm, C = 50 ppm, E = 25 ppm Tolerance: F = 1 %, D = 0.5 %, C = 0.25 %, B = 0.1 % Value = three significant figures and multiplier J = JAN (joint Army - Navy) brand RN55, RN60, RN65, RN70 (4 lines) DALE Company logo 0137J 4 digit date code and JAN brand RN55D Type and characteristic 1211F Value and Tolerance

**Note**

- RL series are color banded per MIL-PRF-22684

PERFORMANCE				
REQUIREMENT	MIL-R-10509			MIL-PRF-22684
	CHARACTERISTIC D	CHARACTERISTIC C	CHARACTERISTIC E	
MIL Temperature Coefficient	+ 200 ppm/°C - 500 ppm/°C	± 50 ppm/°C	± 25 ppm/°C	± 200 ppm/°C
Applicable Vishay Dale Temperature Coefficient	± 100 ppm/°C	± 50 ppm/°C	± 25 ppm/°C	± 200 ppm/°C
<b>TEST</b>	<b>MIL<sub>max.</sub></b>	<b>MIL<sub>max.</sub></b>	<b>MIL<sub>max.</sub></b>	<b>MIL<sub>max.</sub></b>
Thermal Shock	± 0.50 % ΔR	± 0.25 % ΔR	± 0.25 % ΔR	± 1.00 % ΔR
Short Time Overload	± 0.50 % ΔR	± 0.25 % ΔR	± 0.25 % ΔR	± 0.50 % ΔR
Low Temperature Operation	± 0.50 % ΔR	± 0.25 % ΔR	± 0.25 % ΔR	± 0.50 % ΔR
Moisture Resistance	± 1.50 % ΔR	± 0.50 % ΔR	± 0.50 % ΔR	± 1.50 % ΔR
Shock	± 0.50 % ΔR	± 0.25 % ΔR	± 0.25 % ΔR	± 0.50 % ΔR
Vibration	± 0.50 % ΔR	± 0.25 % ΔR	± 0.25 % ΔR	± 0.50 % ΔR
Load Life	± 1.00 % ΔR	± 0.50 % ΔR	± 0.50 % ΔR	± 2.00 % ΔR
Dielectric Withstanding Voltage	± 0.50 % ΔR	± 0.25 % ΔR	± 0.25 % ΔR	± 0.50 % ΔR
Effect of Solder	± 0.50 % ΔR	± 0.10 % ΔR	± 0.10 % ΔR	± 0.50 % ΔR



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.