


**Surface Mount Power Inductors**

POWER INDUCTORS

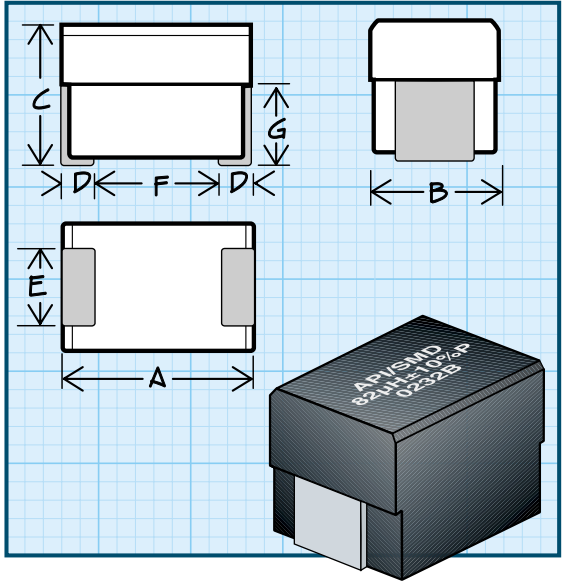

**Physical Parameters**

	Inches	Millimeters
A	0.166 to 0.190	4.22 to 4.83
B	0.118 to 0.134	3.00 to 3.40
C	0.118 to 0.134	3.00 to 3.40
D	0.015 Min.	0.38 Min.
E	0.054 to 0.078	1.37 to 1.98
F	0.118 (Ref. only)	3.00 (Ref. only)
G	0.066 (Ref. only)	1.68 (Ref. only)

Dimensions "A" and "C" are over terminals

**Operating Temperature Range** -55°C to +125°C

**Current Rating at 90°C Ambient** 35°C Rise

**Maximum Power Dissipation at 90°C** 0.278 W

**Inductance** Measured at 1V with no DC current

**Incremental Current** The current at which the inductance will be decreased by a maximum of 5% from its initial zero DC value.

**Packaging** Tape & reel (12mm): 7" reel, 650 pieces max.; 13" reel, 2500 pieces max.

*Made In the U.S.A. Patent Protected*

DASH NUMBER*	INDUCTANCE (µH) ±10% @ 1 KHz	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAX. (mA DC)	INCREMENTAL CURRENT (mA DC)
<b>SERIES P1812</b>				
-102K	1.0	0.113	1050	2400
-122K	1.2	0.199	1000	2158
-152K	1.5	0.222	950	1980
-182K	1.8	0.240	900	1828
-222K	2.2	0.268	850	1697
-272K	2.7	0.288	800	1513
-332K	3.3	0.323	750	1397
-392K	3.9	0.347	700	1250
-472K	4.7	0.401	650	1131
-562K	5.6	0.437	650	1060
-682K	6.8	0.472	600	990
-822K	8.2	0.548	600	871
-103K	10	0.608	550	772
-123K	12	0.670	550	752
-153K	15	0.780	450	693
-183K	18	0.875	400	614
-223K	22	1.200	370	515
-273K	27	1.404	330	465
-333K	33	1.578	300	425
-393K	39	1.848	280	376
-473K	47	2.064	260	366
-563K	56	2.268	240	336
-683K	68	3.408	220	297
-823K	82	3.648	200	267
-104K	100	4.320	180	238
-124K	120	6.000	160	208
-154K	150	6.432	140	183
-184K	180	8.400	120	158
-224K	220	9.680	120	143
-274K	270	12.720	100	129
-334K	330	15.240	90	118

**OPTIONAL TOLERANCES: J=5% H=3% G=2%**

**\*Complete part # must include series # PLUS the dash #**

**For further surface finish information, refer to TECHNICAL section of this catalog.**