

Device Number : DLE-100-002 REV: 2.0

3.68*6.22mm Rectangular Legend LED Lamps

MODEL NO : 1003GD ECN : Page: 1/4

■ Features :

- Choice of various viewing angles
- Available on table and reel
- Reliable and robust
- Pb free
- The product itself will remain within RoHS compliant version.


■ Descriptions :

- The series is specially designed for applications requiring higher brightness.
- The LED lamps are available with different colors, light intensities, epoxy colors, etc.

■ Applications :

- TV set
- Monitor
- Telephone
- Computer

■ Package Dimensions:

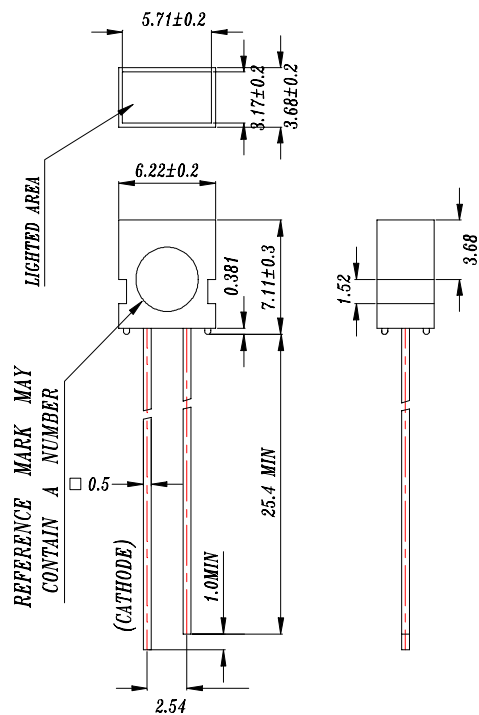

■ Notes :

1. All dimensions are in millimeters.
2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.

PART NO	Chip		Lens Color
	Material	Emitted Color	
1003GD	GaP	Green	Green Diffused

OFFICE : NO. 25, Lane 76, Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000, 2267-9936

FAX : 886-2-2267-6244, 22676189, 22676306

http://www.everlight.com



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-100-002 REV: 2.0

3.68*6.22mm Rectangular Legend LED Lamps

MODEL NO : 1003GD ECN : _____ Page: 2/4

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	If	30	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA
Reverse Voltage	Vr	5	V

Electronic Optical Characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	1.0	4.0	/	mcd	If= 10 mA
Viewing Angle	2θ 1/2	/	100	/	deg	If= 20 mA
Peak Wavelength	λp	/	565	/	nm	If= 20 mA
Dominant Wavelength	λd	/	570	/	nm	If= 20 mA
Spectrum Radiation Bandwidth	Δλ	/	30	/	nm	If= 20 mA
Forward Voltage	Vf	1.7	2.1	2.4	V	If= 20 mA
Reverse Current	Ir	/	/	10	μA	Vr= 5 V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-100-002

REV: 2.0







3.68*6.22mm Rectangular Legend LED Lamps

MODEL NO : 1003GD

ECN : _____

Page: 3/4

■ Typical Electro-Optical Characteristic Curves

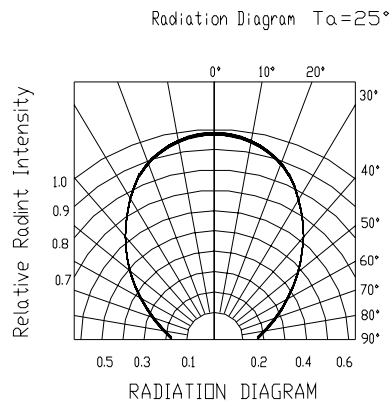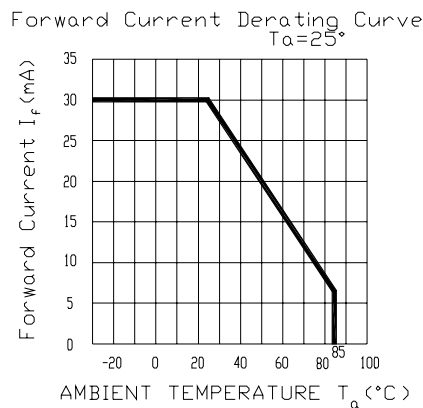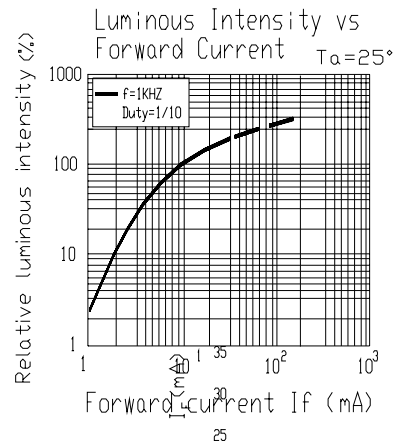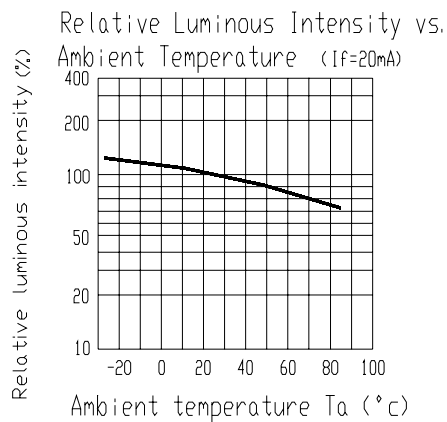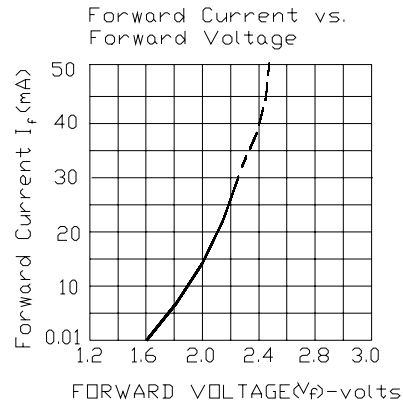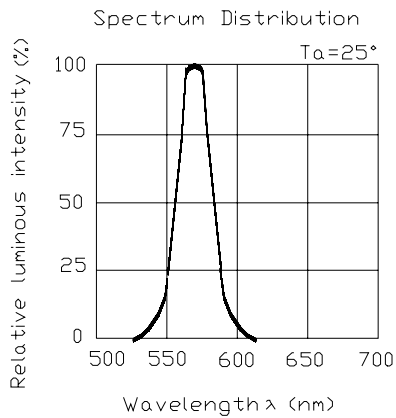



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-100-002 REV: 2.0

3.68*6.22mm Rectangular Legend LED Lamps

MODEL NO : 1003GD ECN : Page: 4/4

■ Reliability test item and condition

No	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1