



### Main

Range of product	Harmony XVE Optimum
Product or component type	Complete illuminated beacon
Beacon/Indicator bk unit type	1 base unit 1 illuminated unit 1 screw fixing cover 1 short fixing base
Signalling type	Steady
Component name	XVE
Light source	Red bulb not included
Bulb type	Incandescent with BA 15d base
[Us] rated supply voltage	<= 240 V AC/DC

### Complementary

Mounting diameter	70 mm
Power dissipation in W	<= 5 W
Connections - terminals	Screw clamp terminals: <= 1 x 1.5 mm <sup>2</sup> with cable end
Marking	CE
[Ui] rated insulation voltage	250 V conforming to IEC 60947-1
Nominal voltage limit	0.85...1.1 Un conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
Luminance	640 cd/m <sup>2</sup>
CAD overall width	70 mm
CAD overall height	129 mm
CAD overall depth	70 mm
Terminals description ISO n°1	(COM-1)PW (GND)GROUND
Product weight	0.245 kg

### Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-5-1
Product certifications	CCC CSA UL
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...55 °C
Class of protection against electric shock	Class I aluminium tube mounting conforming to IEC 61140 Class I plastic tube mounting conforming to IEC 61140
Protective treatment	TC
IP degree of protection	IP40 in any position except vertical position conforming to IEC 60529 IP42 in vertical position conforming to IEC 60529
RoHS EUR status	Compliant
RoHS EUR conformity date	0914


The information provided in this document contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

---

Illuminated Beacon

---


Dimensions

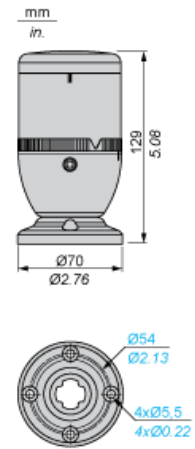

Illuminated Beacon

Panel Cut-out for Mounting Directly on Fixing Base

mm  
in.



---

Illuminated Beacon

---

Wiring Diagram

