

Main

Range of product	Modicon Quantum automation platform
Product or component type	DIO drop interface

Complementary

Number of port	1 single
[Us] rated supply voltage	115/230 V AC
Supply voltage limits	85...276 V
Supply frequency	47...63 Hz
Supply current	0.4 A 230 V 0.2 A 115 V
Inrush current	20 A 230 V 10 A 115 V
Rated power in VA	50 VA
Associated fuse rating	1.5 A
Output voltage	5.1 V
Nominal output current	3 A
Load current	>= 0 A
Short-circuit protection	With
Output overvoltage protection	With
I/O words	30 I/32 O
Typical backplanes	2 positions 3 positions 4 positions 6 positions 10 positions 16 positions
Diagnostics startup	Checksum RAM RAM address
Diagnostics run time	Checksum RAM RAM address
Power dissipation in W	11 W
Connections - terminals	Terminal block, 7 poles
Module format	Standard


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Resistance to electrostatic discharge	8 kV on air conforming to IEC 801-2 4 kV contact conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m
Protective treatment	Conformal coating Humiseal 1A33 TC
Standards	UL 508
Product certifications	CSA Class 1 Division 2 C-Tick DNV GOST UL

Racks for Modules Mounting

Dimensions of Modules and Racks

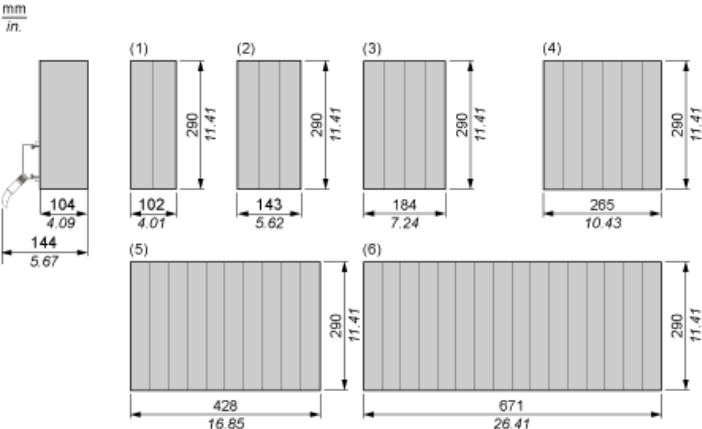

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

---

AC Powered Distributed I/O (DIO) Module

---

Wiring Diagram

