



Main

Range of product	Modicon Quantum automation platform
Product or component type	Ethernet/IP network module

Complementary

Communication port protocol	Ethernet/IP
Maximum number of connections	128
Transmission rate	10/100 Mbit/s
Communication service	CIP Explicit messaging (client messaging) CIP implicit messaging (I/O communication) SNMP agent DHCP/BootP server
Transmission support medium	Twisted pair
Port Ethernet	10BASE-T/100BASE-TX RJ45
Marking	CE
Supply	Via the power supply of the rack
Local signalling	1 LED green transmission activity (TxActive) 1 LED green reception activity (RxActive) 1 LED green/red network communication status (Net Status) 1 LED green/red module status (Mod Status) 1 LED green/red full duplex/collision detection (Fdplex/Col) 1 LED green Ethernet network status (link) 1 LED green connection speed (100MB) 1 LED green configuration status (Ready) 1 LED green communication on the bus (Active)
Current consumption	500 mA at 5 V DC
Module format	Standard
Product weight	0.345 kg


Environment

Standards	CSA 22.2 No 142 FM Class 1 Division 2 UL 508
Product certifications	C-Tick CUL ODVA
IP degree of protection	IP20
Ambient air temperature for operation	0...60 °C
Relative humidity	10...95 % at 60 °C without condensation

The information provided in this document contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Racks for Modules Mounting

Dimensions of Modules and Racks

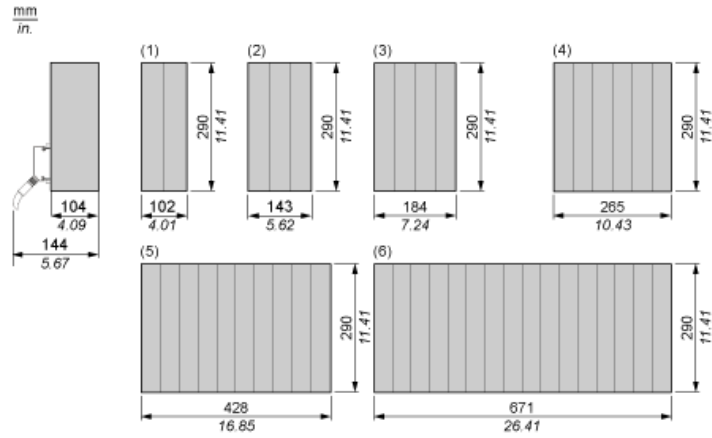

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots