



Main

Range of product	Modicon Quantum automation platform
Product or component type	Ethernet network TCP/IP module
Concept	Transparent Ready
Web server	Class B30
Web services	Data Editor (via PC terminal) Diagnostics via predefined web pages Rack viewer
Communication service	Bandwidth management FDR server Global Data I/O scanning Modbus TCP messaging SNMP network management
Communication port protocol	Ethernet Modbus TCP/IP
Physical interface	RJ45 10BASE-T/100BASE-TX twisted pair MT/RJ 100BASE-FX fiber optic
Transmission rate	10/100 Mbit/s

Complementary

Redundancy	Yes hot standby redundant architecture
Supply	Via the power supply of the rack
Marking	CE
Local signalling	1 LED transmission/reception activity (TxAct/RxAct) 1 LED rack operational (Active) 1 LED network active (Link) 1 LED module ready (Ready) 1 LED full-duplex mode (Fduplex) 1 LED Ethernet network status (RUN) 1 LED Ethernet module fault (Fault) 1 LED download mode (Kernel) 1 LED collision detection (Coll) 1 LED 10 Mbps or 100 Mbps data rate (10 MB/100 MB)
Current consumption	750 mA 5 V DC
Module format	Standard
Product weight	0.345 kg


Environment

IP degree of protection	IP20
Product certifications	CUL UL 508
Standards	CSA 22-2 No 142 FM Class 1 Division 2
Protective treatment	Conformal coating Humiseal 1A33
Resistance to electrostatic discharge	8 kV on air IEC 801-2 4 kV contact IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 4500 m

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Racks for Modules Mounting

Dimensions of Modules and Racks

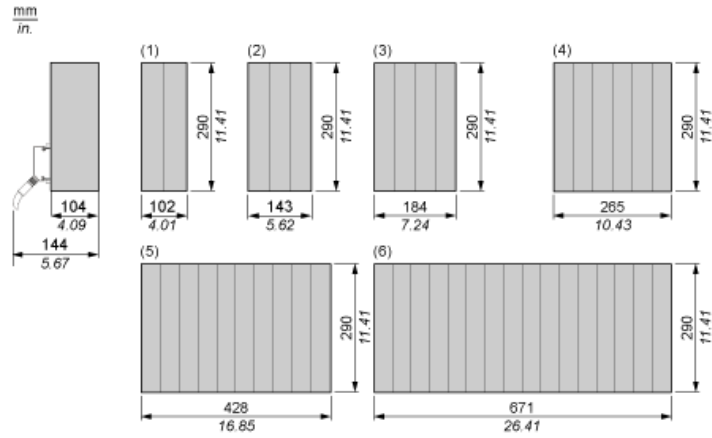

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots