



FEATURES

- Tested for TO-116 Equipment
- Up to 10 Positions
- High Pressure, Reliable Contacts
- Molded (Sealed) Base and Optional Top Seal



DIMENSIONS In inches (and millimeters)

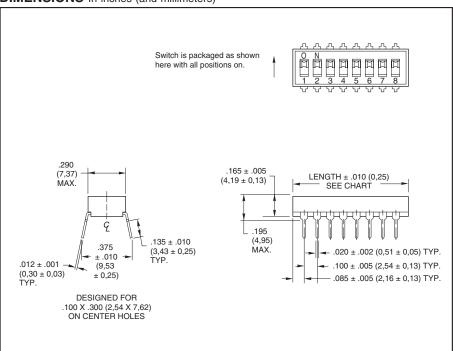

CIRCUITRY

As viewed from the top of the switch in the positions shown in the drawing.



ORDERING INFORMATION: Tube Packaging (Each tube is 19.5 inches long)

No. of	Length	Length	Number	Part
Positions	Inches	Metric	Per Tube	Number*
2 3 4 5 6 7	.270" .370" .470" .570" .670"	6,9 mm 9,4 mm 11,9 mm 14,5 mm 17,0 mm 19,6 mm	60 47 37 31 26 23	90B02PT 90B03PT 90B04PT 90B05PT 90B06PT 90B07PT
8	.870"	22,1 mm	20	90B08PT
9	.970"	24,6 mm	18	90B09PT
10	1.070"	27,2 mm	16	90B10PT

*The "P"in the part number denotes top tape seal versions. To order without top tape seal, leave the "P" off the part number when ordering.

For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.