






ROCKER


Panel Cutout



Actuator Options




Illumination Options



Full

Water Protection Options



PVC Cap

FEATURES:

- High Rating with UL and VDE Approvals
- Curved and Paddle Actuator Options
- PVC Cap for Dust and Water Protection

SPECIFICATIONS:

RATING: RATING OPTION C:

- 16A 125VAC [UL, cUL]
- 10A 250VAC [UL, cUL]
- 1/3HP 125/250VAC 105°C [UL, cUL]
- 10(4)A 250V~ T125 1E4 [VDE]
- 10(2)A 250V~ T85 5E4 [VDE]

RATING OPTION 3:

- 10A 125VAC [UL, cUL]
- 6(2)A 250V~ T125 1E4 [VDE]

TEMPERATURE: -20°C to 105°C [UL, cUL]
-20°C to 125°C [VDE]

ELECTRICAL LIFE: 10,000 Cycles

CONTACT RESISTANCE: 35mΩ Max.

INSULATION RESISTANCE: 100MΩ Min. at 500VDC

DIELECTRIC STRENGTH: 1,500VAC for 1 Minute

INGRESS PROTECTION: IP54 with PVC Cap



MATERIALS:

Body: Polyamide 6/6, UL94 V-2





ACTUATOR: Polyamide 6/6, UL94 V-2

CONTACTS: Silver Alloy

TERMINALS: Silver Plated Copper

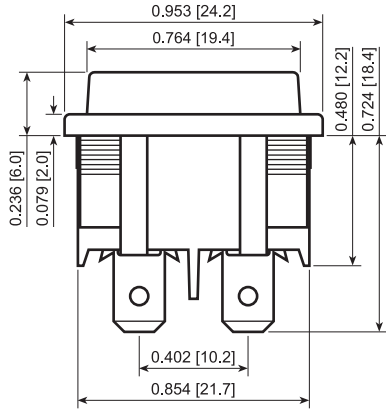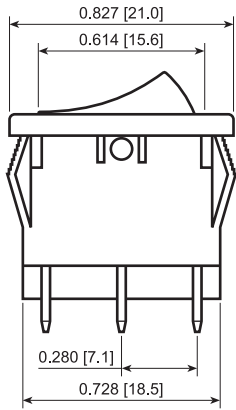

Terminal Options



RAP41232200



RA41231121



RA42631100



RA41231188

Series	Terminal	Function	Rating	Body Color	Actuator Color	Marking Color	Marking Type	Lens Style	Lens Color	Lamp Voltage
<input type="checkbox"/> RA4 - Curved Actuator <input type="checkbox"/> RA4P - Paddle Actuator	<input type="checkbox"/> 1 - 4.8mm Tab (Small Hole) <input type="checkbox"/> 3 - PCB <input type="checkbox"/> 5 - Solder <input type="checkbox"/> 8 - 4.8mm Tab (Large Hole)	1 Pole: <input type="checkbox"/> 1 - Off-On <input type="checkbox"/> 3 - On-On <input type="checkbox"/> 4 - Off-(On) <input type="checkbox"/> 5 - On-Off-On <input type="checkbox"/> A - On-(Off) <input type="checkbox"/> B - On-(On) 2 Pole: <input type="checkbox"/> 2 - Off-On (*) <input type="checkbox"/> G - On-On <input type="checkbox"/> E - Off-(On) <input type="checkbox"/> 6 - On-Off-On <input type="checkbox"/> F - On-(Off) <input type="checkbox"/> H - On-(On)	<input type="checkbox"/> 3 - 10A 125VAC <input type="checkbox"/> C - 16A 125VAC	<input type="checkbox"/> 1 - Black <input type="checkbox"/> 2 - White <input type="checkbox"/> 3 - Almond <input type="checkbox"/> 4 - Grey	<input type="checkbox"/> 1 - Black <input type="checkbox"/> 2 - White <input type="checkbox"/> 3 - Almond <input type="checkbox"/> 4 - Grey <input type="checkbox"/> 5 - Orange <input type="checkbox"/> 7 - Blue <input type="checkbox"/> 8 - Green <input type="checkbox"/> 9 - Red	<input type="checkbox"/> 0 - None <input type="checkbox"/> 1 - Black <input type="checkbox"/> 2 - White <input type="checkbox"/> 8 - Red	<input type="checkbox"/> 0 - None <input type="checkbox"/> 1 - I/O Vert. <input type="checkbox"/> 2 - ON/OFF/ON Vert. <input type="checkbox"/> 3 - ON/OFF Vert. <input type="checkbox"/> 4 - ON/OFF Horiz. <input type="checkbox"/> 9 - I/O/II Horiz. <input type="checkbox"/> S - I/O/II Vert. <input type="checkbox"/> R - I/O Horiz.	<input type="checkbox"/> 1 - Full	<input type="checkbox"/> 0 - Clear <input type="checkbox"/> 1 - Red <input type="checkbox"/> 2 - Amber <input type="checkbox"/> 3 - Green <input type="checkbox"/> 4 - Blue	<input type="checkbox"/> 3 - 6V <input type="checkbox"/> 4 - 12V <input type="checkbox"/> 6 - 125V <input type="checkbox"/> 7 - 250V

Note:
* = Option Available with Illumination

Custom Colors and Markings Available Upon Request For Illuminated Switches Only

EXAMPLE PART NUMBERS:

RA412C1100 2P Off-On
Black Body/Actuator, 4.8mm Tab, No Marking

RA412C1121 2P Off-On
Black Body/Actuator, 4.8mm Tab, I/O Vert.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE