



SRJ / SRK / SRM / SRT Series




SRJ-SERIES


Suggested PCB Layout



Position Options





Actuator Options




SRK-SERIES


Suggested PCB Layout



Position Options



Actuator Options



FEATURES:

- 3x2, 3x3, and 4x1 Pin Layouts
- Through Hole and Surface Mount Versions
- Washable
- Superior Quality

SPECIFICATIONS:



RATING: 100mA 5VDC (Switching)
100mA 50VDC (Non-Switching)
TEMPERATURE: -10°C to 60°C (Operating)
-40°C to 85°C (Storage)
OPERATING FORCE: 400gf*cm
ELECTRICAL LIFE: 15,000 Cycles
CONTACT RESISTANCE: 100mΩ Max.
INSULATION RESISTANCE: 100MΩ at 250VDC
DIELECTRIC STRENGTH: 250VAC for 1 Minute

MATERIALS:



BASE: Polyphenylene Sulfide (PPS)
HOUSING: Polyphenylene Sulfide (PPS)
ACTUATOR: Polyacetal
O-RING: NBR
CONTACT: Glass Fabric Epoxy Resin
Gold Over Nickel Plated
TERMINALS: Gold Over Nickel Plated Bronze
Tin Over Nickel Plated Bronze

SRM-SERIES

Suggested PCB Layout


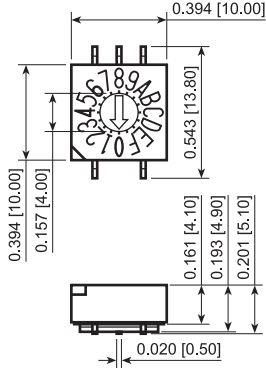


Position Options




SRT-SERIES



Suggested PCB Layout

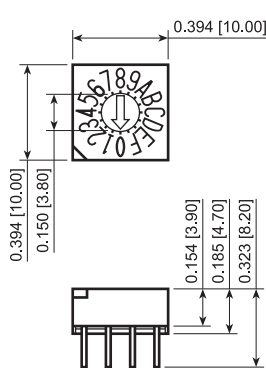

Position Options




Right Angle Option




SRJ-8
SRJ-10HC



SRT-10



SRK-10H



SRM-10T

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Series	Number of Positions	Actuator Options	Right Angle Option	Encoding Options	Tape Sealing	Packaging Options
SRJ - 2x3, Through Hole	8	For SRJ and SRK Series: None - Flush	For SRJ, SRK, and SRM Series: None - Vertical	None - Real	For SRJ, SRK, and SRT Series: None - No Tape	For SRJ, SRK, and SRT Series: None - Tube
SRK - 3x3, Through Hole	10	None - Flush	None - Vertical	C - Complementary	None - No Tape	None - Tube
SRM - 2x3, SMT	16	H - Extended	For SRT Series: None - Vertical		For SRM Series: None - No Tape	For SRJ, SRK, and SRT Series: None - Tube
SRT - 4x1, Through Hole	16		R - Right Angle		T - Taped	For SRM Series: None - Tube
						TR - Tape and Reel

EXAMPLE PART NUMBERS:

- SRJ-10 10 Position
2x3, Through Hole, Flush, Real Code
- SRJ-16 16 Position
2x3, Through Hole, Flush, Real Code
- SRK-10 10 Position
3x3, Through Hole, Flush, Real Code
- SRK-10C 10 Position
3x3, Through Hole, Flush, Comp. Code
- SRK-10H 10 Position
3x3, Through Hole, Raised, Real Code
- SRK-16 16 Position
3x3, Through Hole, Flush, Real Code
- SRK-16C 16 Position
3x3, Through Hole, Flush, Comp. Code
- SRK-16H 16 Position
3x3, Through Hole, Raised, Real Code
- SRK-16HC 16 Position
3x3, Through Hole, Raised, Comp. Code
- SRM-10 10 Position
3x3, SMT, Flush Actuator, Real Code
- SRM-10C 10 Position
3x3, SMT, Flush Actuator, Comp. Code
- SRM-16 16 Position
3x3, SMT, Flush Actuator, Real Code
- SRM-16C 16 Position
3x3, SMT, Flush Actuator, Comp. Code
- SRT-10 10 Position
4x1, Through Hole, Flush, Real Code

