

mm inch

RoHS Directive compatibility information
<http://www.nais-e.com/>

FEATURES

- Low profile 4 mm .157 inch height
- High contact capacity: 2 A
- Surge withstand voltage between contact and coil: 2,500 V (Telcordia)

SPECIFICATIONS

Contact

| | | |
|---|---|--|
| Arrangement | 1 Form C | |
| Initial contact resistance, max. (By voltage drop 6 V DC 1 A) | 50 mΩ | |
| Contact material | Gold-clad silver | |
| Rating | Nominal switching capacity (resistive load) | 2 A 30 V DC |
| | Max. Switching power (resistive load) | 60 W |
| | Max. switching voltage | 220 V DC |
| | Max. switching current | 2 A |
| | Min. switching capacity (Reference value) ^{#1} | 10 μA 10 mV DC |
| Nominal operating power | Single side stable | 140 mW (1.5 to 12 V DC) 270 mW (24 V DC) |
| | 1 coil latching | 100 mW (1.5 to 12 V DC) 150 mW (24 V DC) |
| | 2 coil latching | 200 mW (1.5 to 9 V DC) 250 mW (12 V DC) 400 mW (24 V DC) |
| Expected life (min. operations) | Mechanical (at 180 cpm) | 10 ⁸ (Single side stable) |
| | | 5 × 10 ⁷ (1 or 2 coil latching) |
| | Electrical (at 20 cpm) | 2 A 30 V DC resistive |
| | | 10 ⁵ |

Note:

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load. (SX relays are available for low level load switching [10V DC, 10mA max. level])

Remarks

- * Specifications will vary with foreign standards certification ratings.
- *¹ Measurement at same location as "Initial breakdown voltage" section.
- *² By resistive method, nominal voltage applied to the coil; contact carrying current: 2 A.
- *³ Nominal voltage applied to the coil, excluding contact bounce time.
- *⁴ Nominal voltage applied to the coil, excluding contact bounce time without diode.
- *⁵ Half-wave pulse of sine wave: 6 ms; detection time: 10 μs.
- *⁶ Half-wave pulse of sine wave: 6 ms.

Characteristics

| | | |
|---|-----------------------------------|---|
| Initial insulation resistance ^{*1} | | Min. 1,000 MΩ (at 500 V DC) |
| Initial breakdown voltage | Between open contacts | 750 Vrms for 1 min. (Detection current: 10 mA) |
| | Between contact and coil | 1,500 Vrms for 1 min. (Detection current: 10 mA) |
| FCC surge voltage between open contacts (10×160 μs) | | 1,500 V |
| Surge voltage between contacts and coil (2×10 μs) [Telcordia] | | 2,500 V |
| Temperature rise ^{*2} (at 20°C) | | Max. 50°C |
| Operate time [Set time] ^{*3} (at 20°C) | | Max. 3 ms [Max. 3 ms] |
| Release time [Reset time] ^{*4} (at 20°C) | | Max. 2 ms [Max. 3 ms] |
| Shock resistance | Functional ^{*5} | Min. 750 m/s ² {75 G} |
| | Destructive ^{*6} | Min. 1,000 m/s ² {100 G} |
| Vibration resistance | Functional ^{*7} | 196 m/s ² {20G}, 10 to 55 Hz at double amplitude of 3.3 mm |
| | Destructive | 294 m/s ² {30G}, 10 to 55 Hz at double amplitude of 5 mm |
| Conditions for operation, transport and storage ^{*8} (Not freezing and condensing at low | Ambient temperature ^{*9} | -40°C to +85°C -40°F to +185°F |
| | Humidity | 5 to 85% R.H. |
| Unit weight | | Approx. 1 g .035 oz. |

- *⁷ Detection time: 10 μs.
- *⁸ Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT.
- *⁹ The maximum ambient temperature allows for coil temperature rise at maximum allowable coil voltage. As for the applicable range of continuous carrying current against temperature, please refer to "Maximum value of continuous carrying current" chart.

ORDERING INFORMATION

EX. TK 1 — L2 — H — 12V

| Contact arrangement | Operating function | Terminal shape | Coil voltage (DC) |
|---------------------|--|---|-------------------------------|
| 1: 1 Form C | Nil: Single side stable L: 1 coil latching L2: 2 coil latching | Nil: Standard PC board terminal H: Self-clinching terminal | 1.5, 3, 4.5, 5, 6, 9, 12, 24V |

TYPES AND COIL DATA (at 20°C 68°F)

1. Single side stable

| Part No. | | Nominal voltage, V DC | Pick-up voltage, V DC (max.) | Drop-out voltage, V DC (min.) | Nominal operating current, mA (±10%) | Coil resistance, Ω (±10%) | Nominal operating power, mW | Max. allowable voltage, V DC |
|----------------------------|-------------------------|-----------------------|------------------------------|-------------------------------|--------------------------------------|---------------------------|-----------------------------|------------------------------|
| Standard PC board terminal | Self-clinching terminal | | | | | | | |
| TK1-1.5 V | TK1-H-1.5 V | 1.5 | 1.125 | 0.15 | 93.8 | 16 | 140 | 2.25 |
| TK1-3 V | TK1-H-3 V | 3 | 2.25 | 0.3 | 46.7 | 64.3 | 140 | 4.5 |
| TK1-4.5 V | TK1-H-4.5 V | 4.5 | 3.38 | 0.45 | 31.1 | 145 | 140 | 6.7 |
| TK1-5 V | TK1-H-5 V | 5 | 3.75 | 0.5 | 28.1 | 178 | 140 | 7.5 |
| TK1-6 V | TK1-H-6 V | 6 | 4.5 | 0.6 | 23.3 | 257 | 140 | 9 |
| TK1-9 V | TK1-H-9 V | 9 | 6.75 | 0.9 | 15.5 | 579 | 140 | 13.5 |
| TK1-12 V | TK1-H-12 V | 12 | 9 | 1.2 | 11.7 | 1,028 | 140 | 18 |
| TK1-24 V | TK1-H-24 V | 24 | 18 | 2.4 | 11.3 | 2,133 | 270 | 28.8 |

2. 1 Coil latching

| Part No. | | Nominal voltage, V DC | Set voltage, V DC (max.) | Reset voltage, V DC (max.) | Nominal operating current, mA (±10%) | Coil resistance, Ω (±10%) | Nominal operating power, mW | Max. allowable voltage, V DC |
|----------------------------|-------------------------|-----------------------|--------------------------|----------------------------|--------------------------------------|---------------------------|-----------------------------|------------------------------|
| Standard PC board terminal | Self-clinching terminal | | | | | | | |
| TK1-L-1.5 V | TK1-L-H-1.5 V | 1.5 | 1.125 | 1.125 | 66.7 | 22.5 | 100 | 2.25 |
| TK1-L-3 V | TK1-L-H-3 V | 3 | 2.25 | 2.25 | 33.3 | 90 | 100 | 4.5 |
| TK1-L-4.5 V | TK1-L-H-4.5 V | 4.5 | 3.38 | 3.38 | 22.2 | 202.5 | 100 | 6.7 |
| TK1-L-5 V | TK1-L-H-5 V | 5 | 3.75 | 3.75 | 20 | 250 | 100 | 7.5 |
| TK1-L-6 V | TK1-L-H-6 V | 6 | 4.5 | 4.5 | 16.7 | 360 | 100 | 9 |
| TK1-L-9 V | TK1-L-H-9 V | 9 | 6.75 | 6.75 | 11.1 | 810 | 100 | 13.5 |
| TK1-L-12 V | TK1-L-H-12 V | 12 | 9 | 9 | 8.3 | 1,440 | 100 | 18 |
| TK1-L-24 V | TK1-L-H-24 V | 24 | 18 | 18 | 6.3 | 3,840 | 150 | 28.8 |

3. 2 Coil latching

| Part No. | | Nominal voltage, V DC | Set voltage, V DC (max.) | Reset voltage, V DC (max.) | Nominal operating current, mA (±10%) | Coil resistance, Ω (±10%) | Nominal operating power, mW | Max. allowable voltage, V DC |
|----------------------------|-------------------------|-----------------------|--------------------------|----------------------------|--------------------------------------|---------------------------|-----------------------------|------------------------------|
| Standard PC board terminal | Self-clinching terminal | | | | | | | |
| TK1-L2-1.5 V | TK1-L2-H-1.5 V | 1.5 | 1.125 | 1.125 | 133.9 | 11.2 | 200 | 2.25 |
| TK1-L2-3 V | TK1-L2-H-3 V | 3 | 2.25 | 2.25 | 66.7 | 45 | 200 | 4.5 |
| TK1-L2-4.5 V | TK1-L2-H-4.5 V | 4.5 | 3.38 | 3.38 | 44.5 | 101.2 | 200 | 6.7 |
| TK1-L2-5 V | TK1-L2-H-5 V | 5 | 3.75 | 3.75 | 40 | 125 | 200 | 7.5 |
| TK1-L2-6 V | TK1-L2-H-6 V | 6 | 4.5 | 4.5 | 33.3 | 180 | 200 | 9 |
| TK1-L2-9 V | TK1-L2-H-9 V | 9 | 6.75 | 6.75 | 22.2 | 405 | 200 | 13.5 |
| TK1-L2-12 V | TK1-L2-H-12 V | 12 | 9 | 9 | 20.8 | 576 | 250 | 14.4 |
| TK1-L2-24 V | TK1-L2-H-24 V | 24 | 18 | 18 | 16.7 | 1,440 | 400 | 26.4 |

Notes:


1. Specified value of the pick-up, drop-out, set and reset voltage is with the condition of square wave coil pulse.
2. Standard packing: Tube: 50 pcs.; Case: 1,000 pcs.
3. In case of 5 V transistor drive circuit, it is recommended to use 4.5 V type relay.

DIMENSIONS


mm inch



Standard PC board terminal

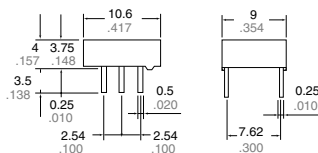


PC board pattern (Copper-side view)




Tolerance: ±0.1 ±0.004

Self-clinching terminal

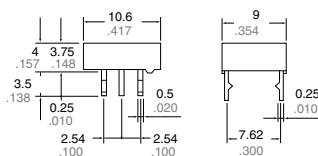

Schematic (Bottom view)

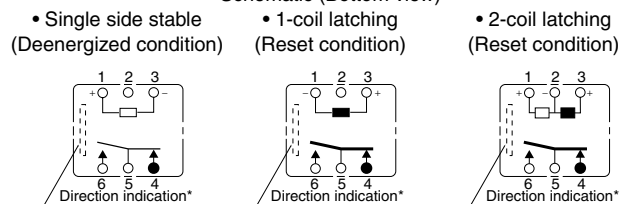


General tolerance: ±0.3 ±0.012

*Orientation stripe located on top of relay.


REFERENCE DATA

1. Maximum value of continuous carrying current


Test conditions:
Coil applied voltage: 110% of rated voltage
Continuous carrying current: 1,000 hours

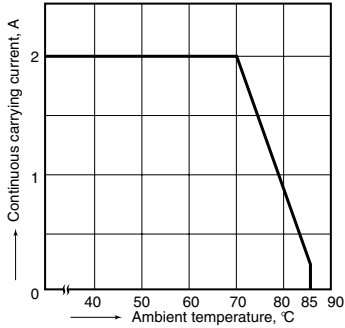

2. Maximum switching capacity

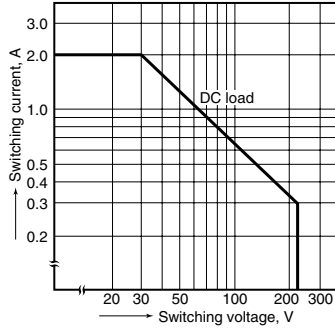


3. Life curve

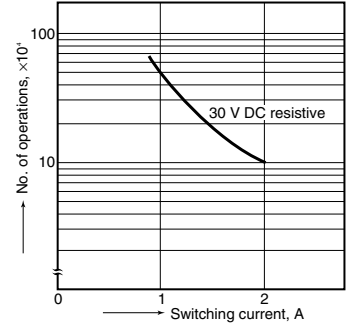

4. Mechanical life


Tested sample: TK1-12V, 8 pcs.
Switching frequency: 30 Hz

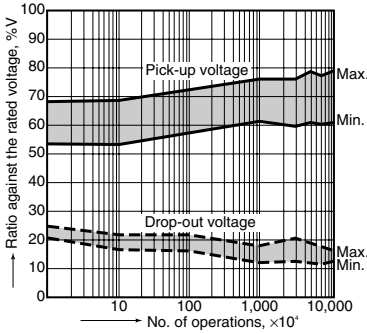


5. Electrical life (DC load)

Tested sample: TK1-12V, 10 pcs.
Condition: 2 A 30 V DC resistive load, 20 cpm


Circuit

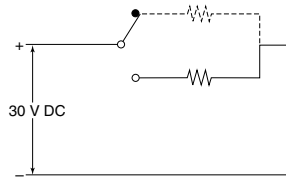

Change of pick-up and drop-out voltage

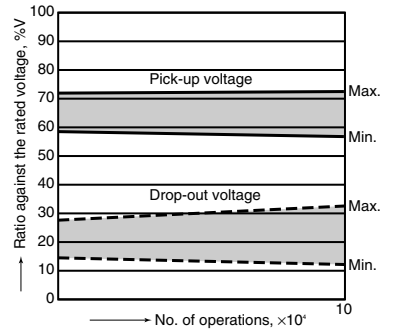


Change of contact resistance

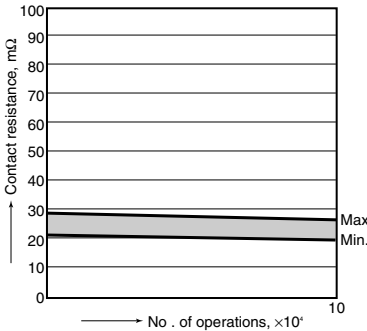


6. Coil temperature rise

Tested sample: TK1-12V, 6 pcs.
Measured portion: Inside the coil
Carrying current: 0 A, 1 A, 2 A
Ambient temperature: 25°C 77°F

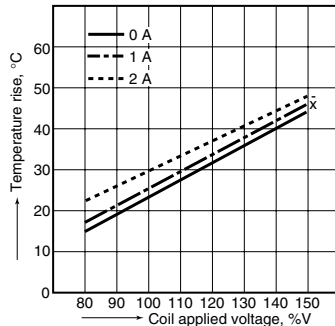


Ambient temperature: 70°C 158°F

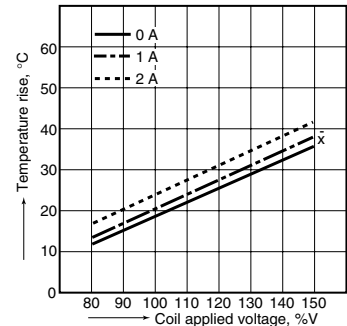


7. Operate/release time characteristics

Tested sample: TK1-5 V, 50 pcs.

<With diode>

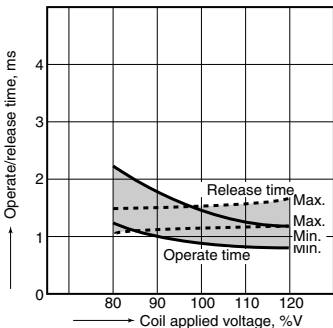


<Without diode>

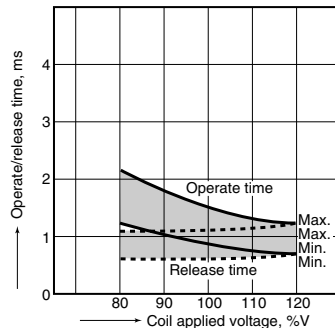


8. Distribution of pick-up and drop-out voltage


Tested sample: TK1-5V, 50 pcs.

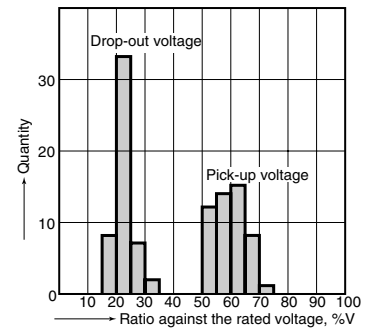


9. Distribution of set and reset voltage
Tested sample: TK1-L2-12V, 50 pcs.

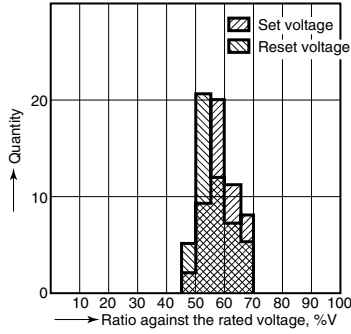

10. Ambient temperature characteristics
Tested sample: TK1-12V, 5 pcs.

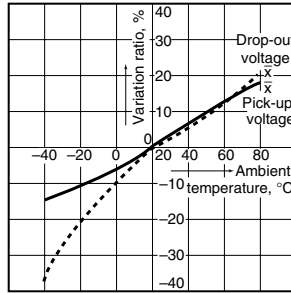


11. Distribution of contact resistance
Tested sample TK1-5V, 50 pcs. (50x2 contacts)

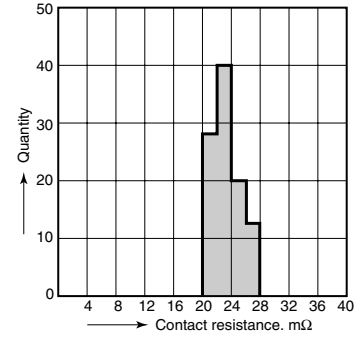


12. Distribution of operate/release bounce time
Tested sample: TK1-5V, 50 pcs.


<Operate bounce time>

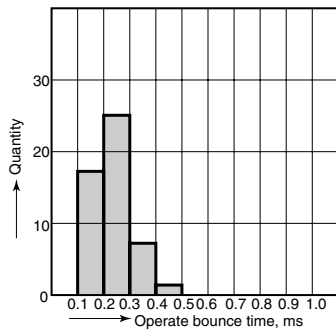


<Release bounce time>

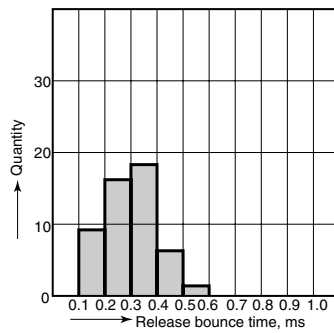


13.-(1) High-frequency characteristics
Isolation characteristics

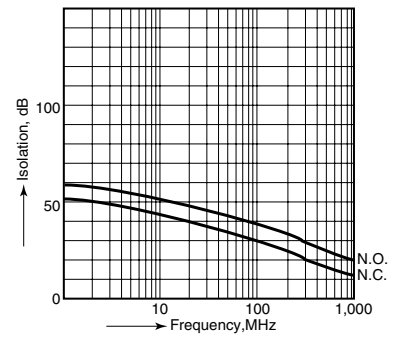


13.-(2) High-frequency characteristics
Insertion loss characteristics

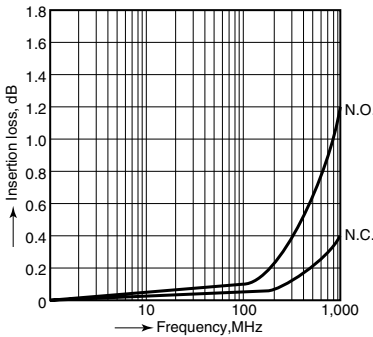


13.-(3) High-frequency characteristics
V.S.W.R.

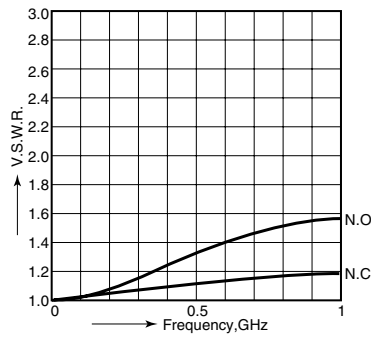


14. Malfunctional shock
Tested sample: TK1-12V, 6 pcs. (single side stable);
TK1-L2-12V, 6 pcs. (latching)

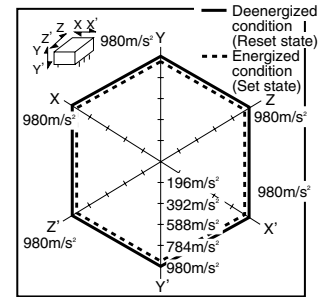


15.-(1) Influence of adjacent mounting

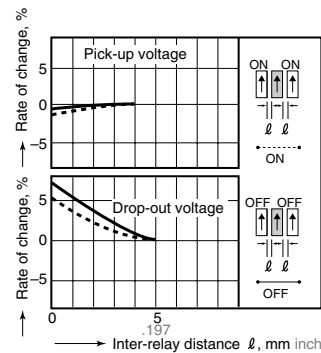

15.-(2) Influence of adjacent mounting

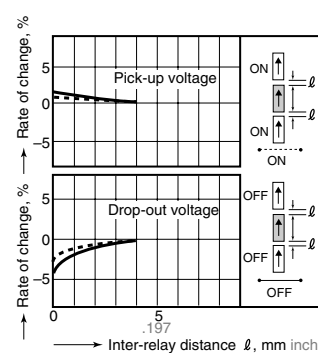

15.-(3) Influence of adjacent mounting



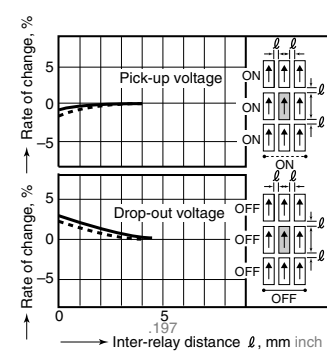


16. Actual load test (35 mA 48 V DC wire spring relay load)

Change of pick-up and drop-out voltage

Change of contact resistance

Circuit

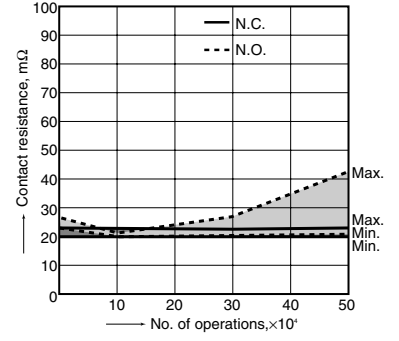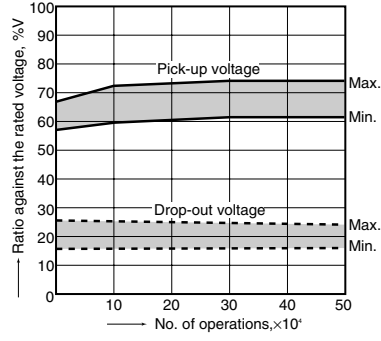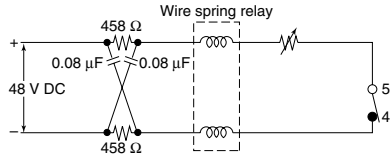

For Cautions for Use, see Relay Technical Information .