


Multi Control Devices sidejog Encoder and Push Operation Type Switch

SRBE Series



A compact multifunctional operating device that can utilize the side of the set.

Multi Control Devices

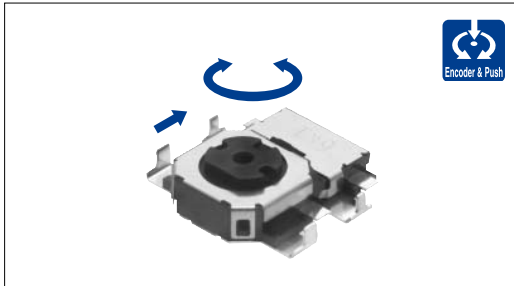

Typical Specifications

Items		Specifications
Ratings(max.)(min.) (Resistive load)		1mA 5V DC / 50 μ A 3V DC
Output voltage	Jog portion	1V max. at 1mA 5V DC (Resistive load)
	Push portion	
Operating force(Push portion)		3.5 \pm 1.5N
Travel(Push operation)		0.2mm
Operating life	Jog portion	100,000cycles
	Push portion	

Product Line


Number of detent	Number of pulse	Operating direction	Mounting method	Rotational torque (Jog portion)	Minimum order unit(pcs.)	製品番号	Product No.
12	6	Horizontal	Standard	3 \pm 2mN · m	6,000	SRBE110300	1
			Low-profile		5,200	SRBE210200	2

Variable Resistor Type

Switch Type

Taping Specification (Taping Packaging)

Reel Size Unit:mm

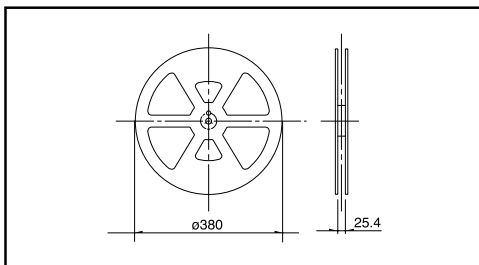

Product No.	Number of packages(pcs.)			Tape width (mm)
	1 reel	1 case / Japan	1 case / export packing	
SRBE110300	1,500	3,000	6,000	24
SRBE210200	1,300	2,600	5,200	

Note

Please place purchase orders per minimum order unit (integer).

Dimensions


Unit:mm

No	Style	PC board mounting hole dimensions (Viewed from direction A)
1		
2		


Multi Control Devices

Variable Resistor Type
Switch Type





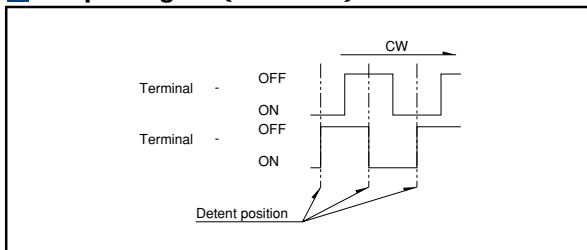

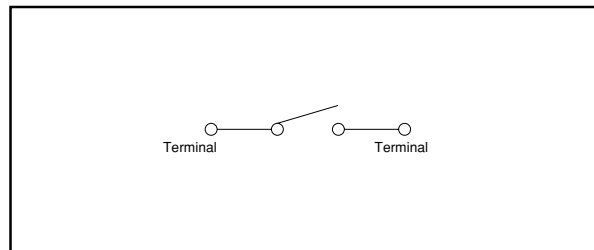



Output Signal (Encoder)



Circuit Diagram



List of Varieties

Series	Switch type								
	SKQU			SSAF	SRBE	SLLB	SLLB5 Small type		
Items	SKQUAA/SKQUBA	SKQUCA	SKQUDB						
Photo									
Function									
Dimensions (typical value) (mm)	W	10			10.85	12	11.8	9.5	
	D					11	11.4	8.8	
	H	7.1	10	8.6	3	3.8	3	2.2	
Outlined specifications	Number of operating shafts	Single-shaft							
	Shaft material	Resin							
	Directional resolution	4-direction			8-direction	-	2-direction		
	Directional operating feeling	With			Without	With	Without		
	Lever return mechanism	With				Without	With		
	Center-push switch	With/Without			With		With/Without	With	
	Encoder	Without				With	Without		
Operating temperature range	-30 to +85			-10 to +60					
Rating(max.)(Resistive load)	50mA 12V DC			20mA 5V DC	1mA 5V DC	10mA 5V DC			
Electrical performance	Output voltage	_____			1V max. at 1mA 5V DC (Resistive load)				
	Directional resolution	4-direction			8-direction	-	2-direction		
	Insulation resistance	100M min. 100V DC			10M min. 100V DC	50M min. 50V DC	100M min. 100V DC		
	Voltage proof	250V AC for 1min.			100V AC for 1min.	50V AC for 1min.	100V AC for 1min.		
	Directional operating force	1.57 ^{+0.49} _{-0.59} N	1.57 ^{+0.39} _{-0.69} N		0.5N ^{+0.5} _{-0.35} N	_____	0.65 ± 0.3N		
	Mechanical performance	Push operating force	_____	3.14 ± 0.59N		2.5 ^{+0.7} _{-0.5} N	3.5 ± 1.5N	2 ± 1N	2.5 ± 1N
Encoder detent torque		_____			3 ± 2mN·m		_____		
Terminal strength		_____			_____		3N for 1min.		
Actuator strength		Pushing direction	_____			50N			
		Operating direction	_____			50N	_____	10N	
Endurance	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively							
	Operating life without load	_____			100,000cycles				
	Operating life with load (at rated load)	_____			100,000cycles				
Environmental performance	Cold	-30 ± 2 for 96h			-40 ± 2 for 96h		-20 ± 2 for 96h		
	Dry heat	80 ± 2 for 96h			85 ± 2 for 96h				
	Damp heat	60 ± 2, 90 to 95%RH for 96h			40 ± 2, 90 to 95%RH for 96h				
	Soldering	Manual soldering	350 max. 3s max.			350 ± 10 4 ¹ / ₅ s	350 ± 5 3s max.		
Dip soldering		260 max. 5s max. (SKQUAA,CA)			_____				
Reflow soldering		Please see P.492 (SKQUBA,DB)			Please see P.492				
Page		482			484	486	488	490	

Multi Control Devices

Variable Resistor Type

Switch Type


Switch Type Multi Control Devices Soldering Conditions492
 Switch Type Multi Control Devices Cautions493

Soldering Conditions

Example of Reflow Soldering Condition

1. Heating method: Double heating method with infrared heater.
2. Temperature measurement: Thermocouple 0.1 to 0.2 CA (K) or CC (T) at solder joints copper foil surface. A heat resistive tape should be used to fix thermocouple.
3. Temperature profile

Multi Control Devices

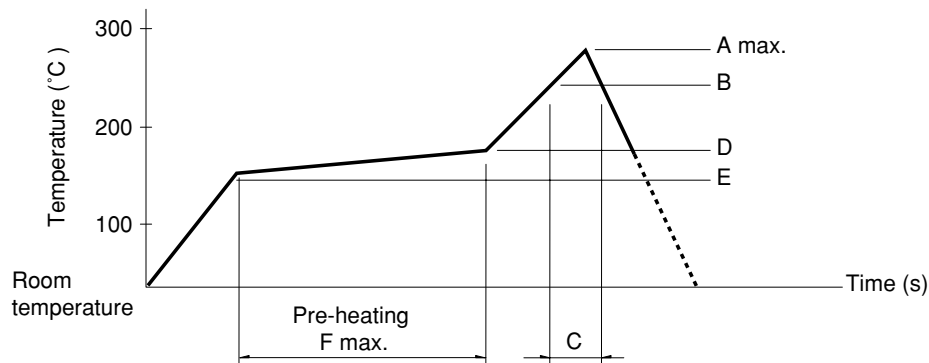

Series (Reflow type)	A () 3s max.	B ()	C (s)	D ()	E ()	F (s)
RKJXS	260	230	40	150	150	120
SLLB, SLLB5	240		20			
SKRV/SKRH/SKQUBA,DB/SSAF/SRBE	260		40	180		

Variable Resistor Type

Switch Type

Notes

1. The above temperature shall be measured on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the material, size thickness of PC boards and others. The above-stated conditions shall also apply to switch surface temperatures.
2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.