
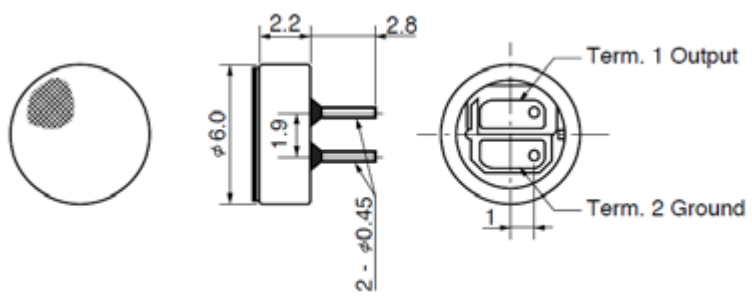
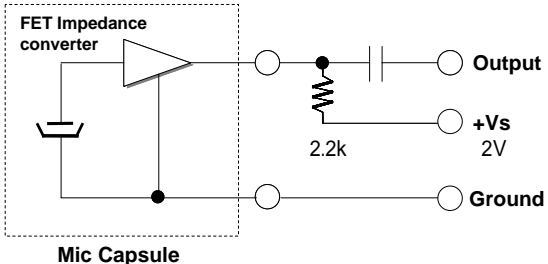
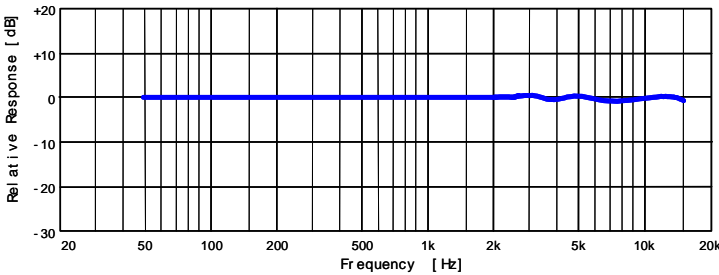


Omnidirectional Back Electret Condenser Microphone Cartridge

WM-64PC

Small and thin omnidirectional microphone
 Pin type for connector connection or direct-in to PCB
 Back electret type designed for high resistance to vibrations
 RFI protected
 33pF capacitor inside

<h3>Appearance</h3> 	<h3>Dimensional Drawing</h3> <p style="text-align: right;">Unit : mm</p> 
<h3>Schematic Diagram</h3> 	<h3>Typical Frequency Response Curve</h3> 

Sensitivity (0dB=1V/Pa, 1kHz)	<u>Sensitivity</u>	<u>Model No.</u>	Vs=2.0V RL=2.2k
	-46+/- -3dB	WM-64PCX	
	-44+/- -3dB	WM-64PCT	

Specifications	
Dimensions	6 x 2.2 mm
Impedance	Less than 2.2k
Directivity	Omnidirectional
Frequency	20-16,000Hz
Max operation voltage	10V
Standard operation voltage	2V
Current consumption	Max 0.5mA
Sensitivity reduction	Within -3dB at 1.5V
S/N ratio	More than 58dB

Specifications are subject to change without notice.