

Six-Pack XPT IGBT



$$V_{CES} = 1200 \text{ V}$$

$$I_{C25} = 120 \text{ A}$$

$$V_{CE(sat)} = 1.8 \text{ V}$$

Part name (Marking on product)

MIXA80W1200TED

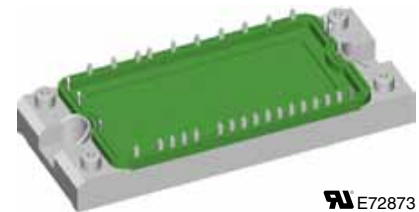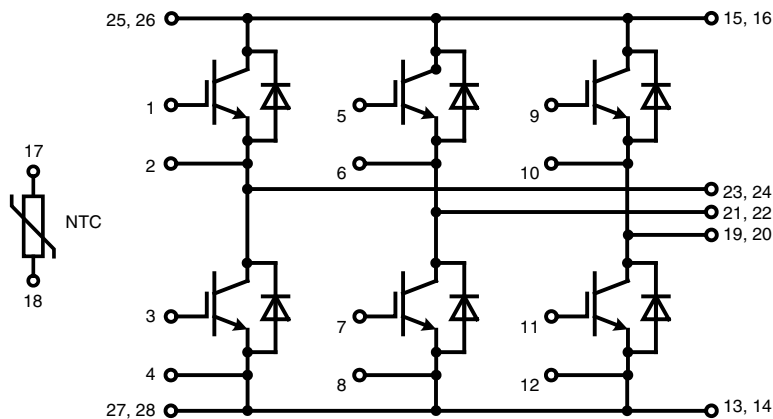

E72873

Pin configuration see outlines.

Features:

- Easy paralleling due to the positive temperature coefficient of the on-state voltage
- Rugged XPT design (Xtreme light Punch Through) results in:
 - short circuit rated for 10 μ sec.
 - very low gate charge
 - square RBSOA @ 3x I_C
 - low EMI
- Thin wafer technology combined with the XPT design results in a competitive low $V_{CE(sat)}$
- SONIC™ diode
 - fast and soft reverse recovery
 - low operating forward voltage

Application:

- AC motor drives
- Solar inverter
- Medical equipment
- Uninterruptible power supply
- Air-conditioning systems
- Welding equipment
- Switched-mode and resonant-mode power supplies

Package:

- "E2-Pack" standard outline
- Insulated copper base plate
- Soldering pins for PCB mounting
- Temperature sense included

Output Inverter T1 - T6

| Symbol | Definitions | Conditions | Ratings | | | Unit |
|---------------|---------------------------------------|--|------------------------------|------|------|---------------|
| | | | min. | typ. | max. | |
| V_{CES} | collector emitter voltage | | | | 1200 | V |
| V_{GES} | max. DC gate voltage | continuous | | | ±20 | V |
| V_{GEM} | max. transient collector gate voltage | transient | | | ±30 | V |
| I_{C25} | collector current | | | | 120 | A |
| I_{C80} | | | | | 84 | A |
| P_{tot} | total power dissipation | | | | 390 | W |
| $V_{CE(sat)}$ | collector emitter saturation voltage | $I_C = 77 \text{ A}; V_{GE} = 15 \text{ V}$ | | 1.8 | 2.1 | V |
| | | | | 2.1 | | V |
| $V_{GE(th)}$ | gate emitter threshold voltage | $I_C = 3 \text{ mA}; V_{GE} = V_{CE}$ | | 5.4 | 6.0 | V |
| I_{CES} | collector emitter leakage current | $V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$ | | 0.03 | 0.2 | mA |
| | | | | 0.6 | | mA |
| I_{GES} | gate emitter leakage current | $V_{GE} = \pm 20 \text{ V}$ | | | 500 | nA |
| $Q_{G(on)}$ | total gate charge | $V_{CE} = 600 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 75 \text{ A}$ | | 230 | | nC |
| $t_{d(on)}$ | turn-on delay time | inductive load $V_{CE} = 600 \text{ V}; I_C = 75 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 10 \Omega$ | $T_{VJ} = 125^\circ\text{C}$ | | 70 | ns |
| t_r | current rise time | | | | 40 | ns |
| $t_{d(off)}$ | turn-off delay time | | | | 250 | ns |
| t_f | current fall time | | | | 100 | ns |
| E_{on} | turn-on energy per pulse | | | | 6.8 | mJ |
| E_{off} | turn-off energy per pulse | | | | 8.3 | mJ |
| RBSOA | reverse bias safe operating area | $V_{GE} = \pm 15 \text{ V}; R_G = 10 \Omega;$ | | | 225 | A |
| | | | | | | |
| SCSOA | short circuit safe operating area | | | | | |
| t_{SC} | short circuit duration | $V_{CE} = 900 \text{ V}; V_{GE} = \pm 15 \text{ V};$ | | | 10 | μs |
| I_{SC} | short circuit current | $R_G = 10 \Omega;$ non-repetitive | | 300 | | A |
| R_{thJC} | thermal resistance junction to case | (per IGBT) | | | 0.32 | K/W |

Output Inverter D1 - D6

| Symbol | Definitions | Conditions | Ratings | | | Unit |
|------------|-------------------------------------|---|------------------------------|------|------|---------------|
| | | | min. | typ. | max. | |
| V_{RRM} | max. repetitive reverse voltage | | | | 1200 | V |
| I_{F25} | forward current | | | | 135 | A |
| I_{F80} | | | | | 90 | A |
| V_F | forward voltage | $I_F = 100 \text{ A}; V_{GE} = 0 \text{ V}$ | | 1.95 | 2.2 | V |
| | | | | 1.95 | | V |
| Q_{rr} | reverse recovery charge | $V_R = 600 \text{ V}$ $di_F/dt = -1600 \text{ A}/\mu\text{s}$ $I_F = 100 \text{ A}; V_{GE} = 0 \text{ V}$ | $T_{VJ} = 125^\circ\text{C}$ | | 12.5 | μC |
| I_{RM} | max. reverse recovery current | | | | 100 | A |
| t_{rr} | reverse recovery time | | | | 350 | ns |
| E_{rec} | reverse recovery energy | | | | 4 | mJ |
| R_{thJC} | thermal resistance junction to case | (per diode) | | | 0.4 | K/W |

$T_C = 25^\circ\text{C}$ unless otherwise stated


Temperature Sensor NTC

| Symbol | Definitions | Conditions | Ratings | | | Unit |
|-------------|-------------|--------------------------|---------|------|------|------------|
| | | | min. | typ. | max. | |
| R_{25} | resistance | $T_C = 25^\circ\text{C}$ | 4.75 | 5.0 | 5.25 | k Ω |
| $B_{25/50}$ | | | | 3375 | | K |

Module

| Symbol | Definitions | Conditions | Ratings | | | Unit |
|-----------------------|-------------------------------------|--|---------|------|------|------------------|
| | | | min. | typ. | max. | |
| T_{VJ} | operating temperature | | -40 | | 125 | $^\circ\text{C}$ |
| T_{VJM} | max. virtual junction temperature | | | | 150 | $^\circ\text{C}$ |
| T_{stg} | storage temperature | | -40 | | 125 | $^\circ\text{C}$ |
| V_{ISOL} | isolation voltage | $I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$ | | | 3000 | V~ |
| CTI | comparative tracking index | | | | 200 | |
| M_d | mounting torque (M5) | | 3 | | 6 | Nm |
| d_s | creep distance on surface | | 6 | | | mm |
| d_A | strike distance through air | | 6 | | | mm |
| $R_{\text{pin-chip}}$ | resistance pin to chip | | | 2.5 | | m Ω |
| R_{thCH} | thermal resistance case to heatsink | with heatsink compound | | 0.02 | | K/W |
| Weight | | | | 180 | | g |


Equivalent Circuits for Simulation



| Symbol | Definitions | Conditions | Ratings | | | Unit |
|--------|---------------------|------------|------------------------------|------|------|------------|
| | | | min. | typ. | max. | |
| V_0 | IGBT | T1 - T6 | $T_{VJ} = 150^\circ\text{C}$ | 1.1 | | V |
| R_0 | | | | 17.9 | | m Ω |
| V_0 | free wheeling diode | D1 - D6 | $T_{VJ} = 150^\circ\text{C}$ | 1.09 | | V |
| R_0 | | | | 9.1 | | m Ω |


$T_C = 25^\circ\text{C}$ unless otherwise stated

Circuit Diagram

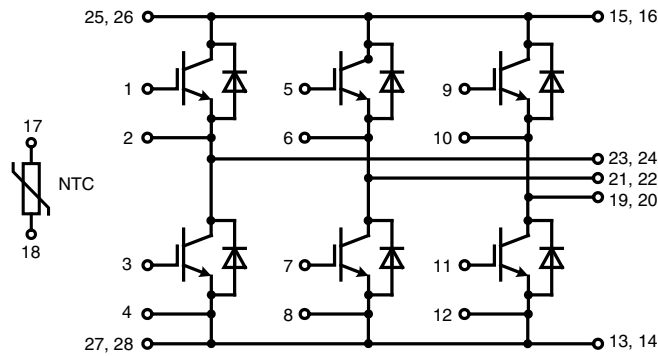


Outline Drawing

Dimensions in mm (1 mm = 0.0394")

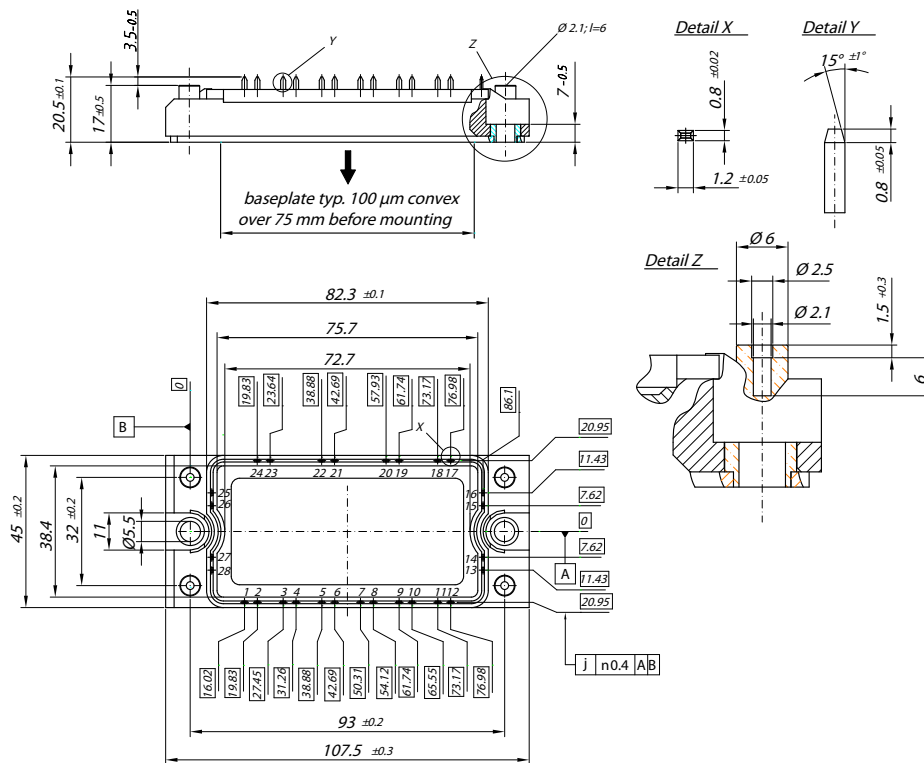

Product Marking

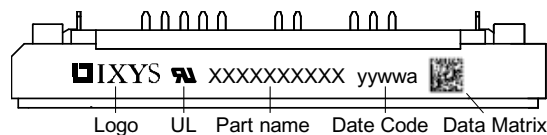

Part number

- M = Module
- I = IGBT
- X = XPT
- A = standard
- 80 = Current Rating [A]
- W = Six-Pack
- 1200 = Reverse Voltage [V]
- T = NTC
- ED = E2-Pack

| Ordering | Part Name | Marking on Product | Delivering Mode | Base Qty | Ordering Code |
|----------|-----------------|--------------------|-----------------|----------|---------------|
| Standard | MIXA80W1200 TED | MIXA80W1200TED | Box | 6 | 508642 |

IXYS reserves the right to change limits, test conditions and dimensions.

20100827d

© 2010 IXYS All rights reserved

4 - 7

Transistor T1 - T6

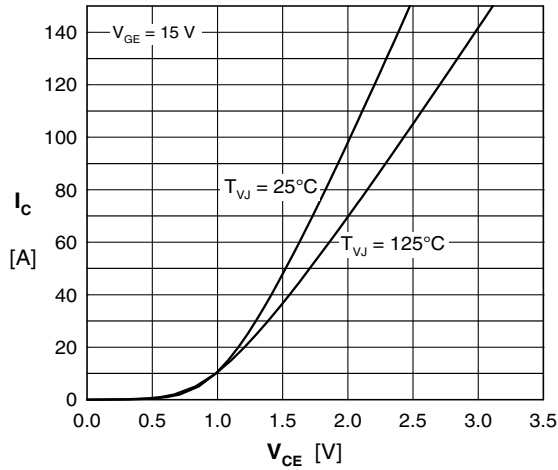


Fig. 1 Typ. output characteristics

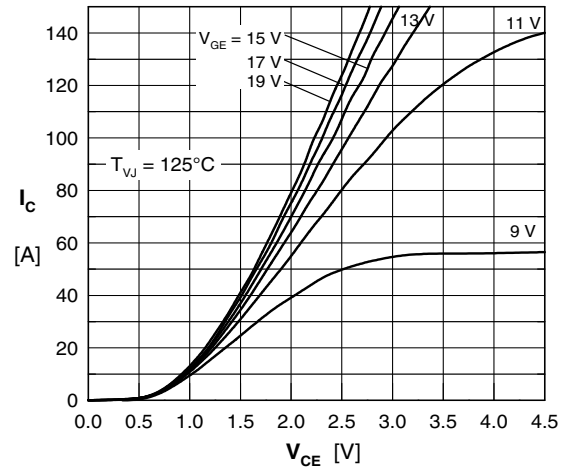


Fig. 2 Typ. output characteristics

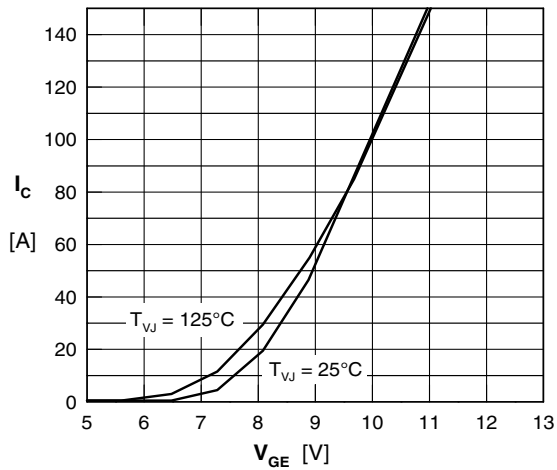


Fig. 3 Typ. transfer characteristics

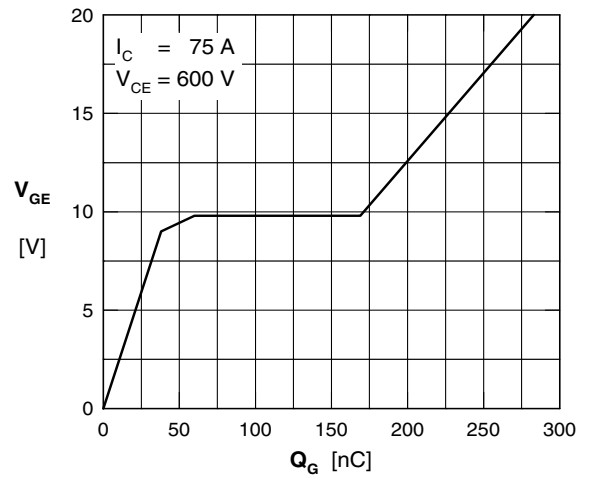


Fig. 4 Typ. turn-on gate charge

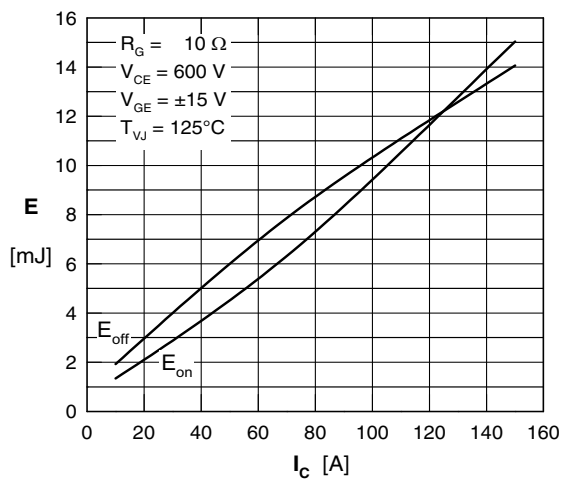


Fig. 5 Typ. switching energy vs. collector current

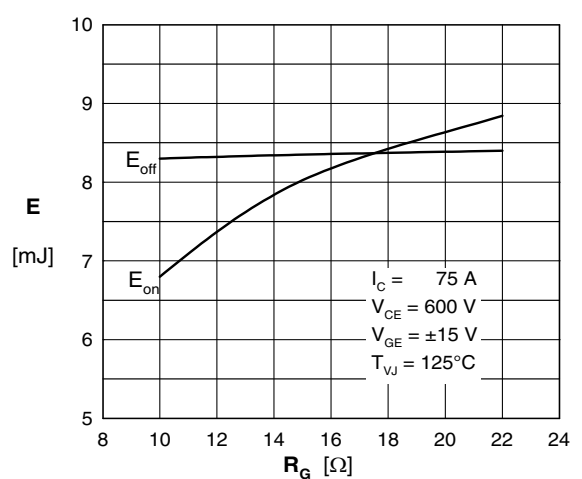


Fig. 6 Typ. switching energy vs. gate resistance

IXYS reserves the right to change limits, test conditions and dimensions.

20100827d

Inverter D1 - D6

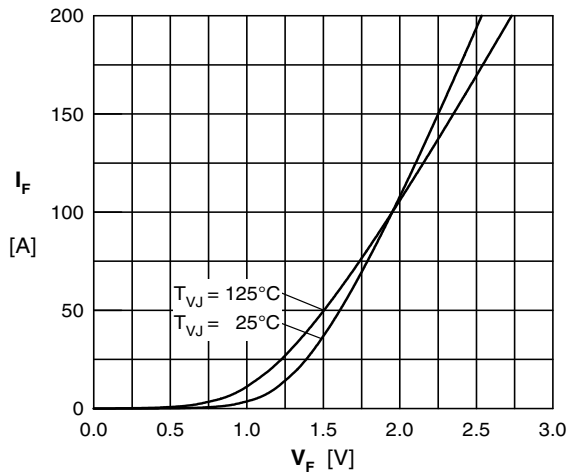


Fig. 7 Typ. Forward current versus V_F

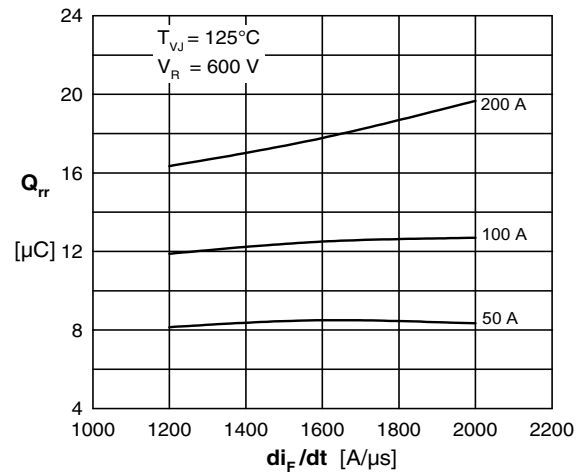


Fig. 8 Typ. reverse recov.charge Q_{rr} vs. di/dt

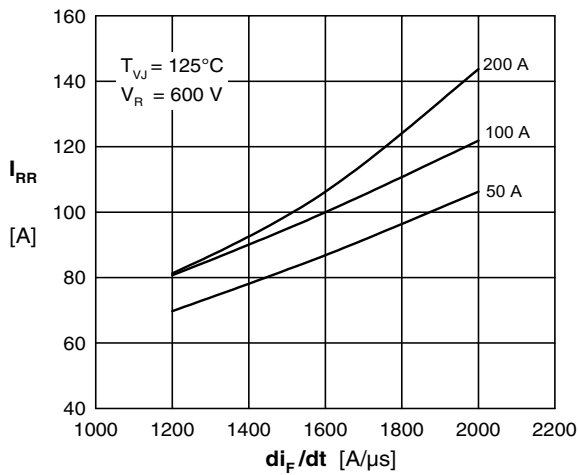


Fig. 9 Typ. peak reverse current I_{RM} vs. di/dt

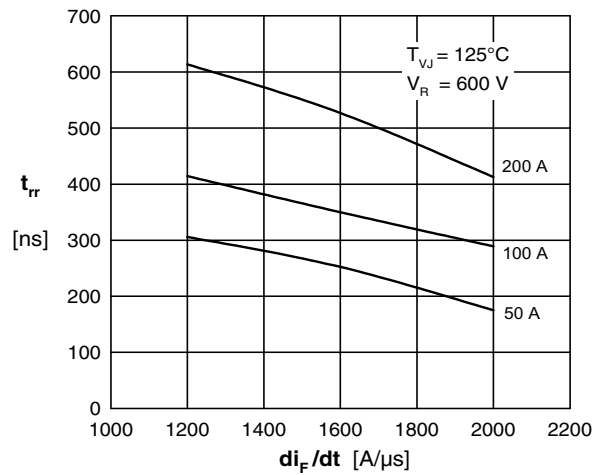


Fig. 10 Typ. recovery time t_{rr} versus di/dt

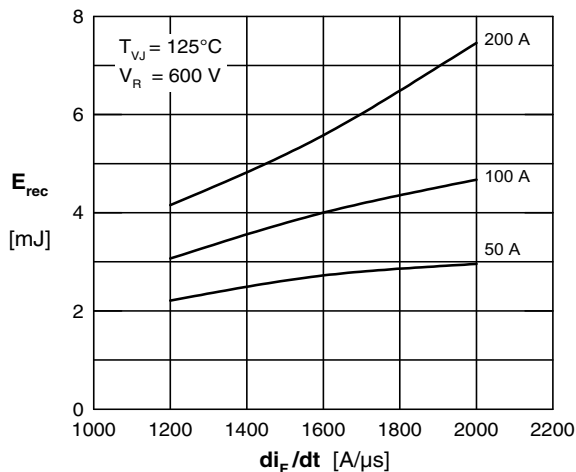


Fig. 11 Typ. recovery energy E_{rec} versus di/dt

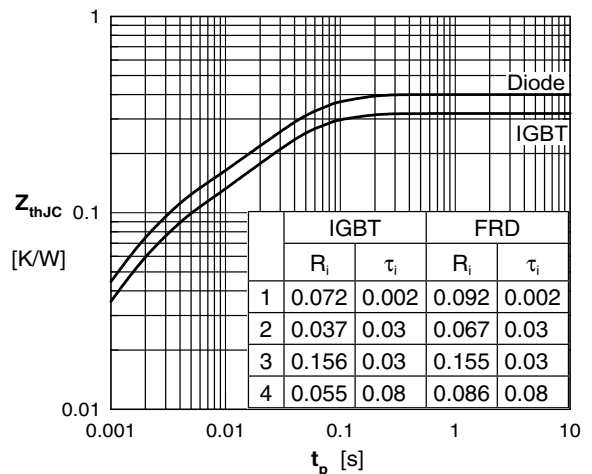


Fig. 12 Typ. transient thermal impedance

NTC

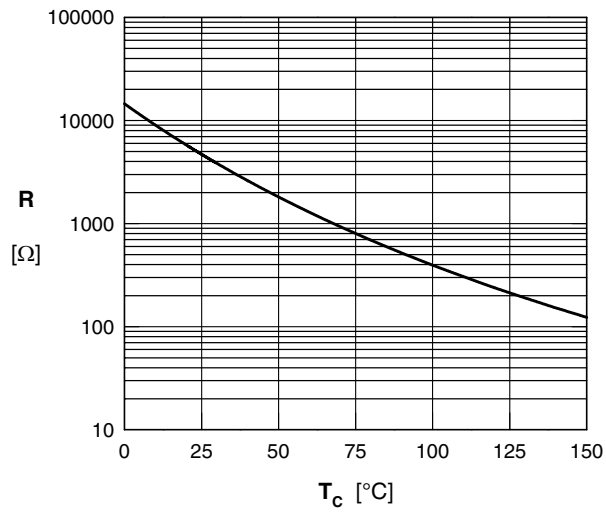


Fig.13 Typ. NTC resistance vs. temperature