
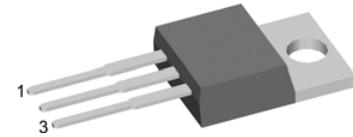


Schottky Diode Gen 2

High Performance Schottky Diode
Low Loss and Soft Recovery
Common Cathode

Part number

DSA 10 C 150 PB



Backside: cathode

Features / Advantages:

- Very low V_f
- Extremely low switching losses
- low I_{rm} values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

Applications:

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Package:


- Housing: TO-220
- Industry standard outline
- Epoxy meets UL 94V-0
- RoHS compliant

Symbol	Definition	Conditions		Ratings		
		min.	typ.	max.	Unit	
V _{RRM}	max. repetitive reverse voltage		T _{VJ} = 25°C		150	V
I _R	reverse current	V _R = 150V	T _{VJ} = 25°C		0.2	mA
		V _R = 150V	T _{VJ} = 125°C		0.9	mA
V _F	forward voltage	I _F = 5A	T _{VJ} = 25°C		0.86	V
		I _F = 10A			0.93	V
		I _F = 5A	T _{VJ} = 125°C		0.71	V
		I _F = 10A			0.80	V
I _{FAV}	average forward current	rectangular d = 0.5	T _C = 155°C		5	A
V _{F0}	threshold voltage	} for power loss calculation only	T _{VJ} = 175°C		0.54	V
r _F	slope resistance				19.4	mΩ
R _{thJC}	thermal resistance junction to case				4.80	K/W
T _{VJ}	virtual junction temperature		-55		175	°C
P _{tot}	total power dissipation		T _C = 25°C		30	W
I _{FSM}	max. forward surge current	t = 10 ms (50 Hz), sine	T _{VJ} = 45°C		100	A
C _J	junction capacitance	V _R = 24V; f = 1 MHz	T _{VJ} = 25°C		29	pF

Symbol	Definition	Conditions	Ratings		
			min.	typ.	max.
I_{RMS}	RMS current	per terminal ¹⁾			20 A
R_{thCH}	thermal resistance case to heatsink			0.50	K/W
T_{stg}	storage temperature		-55		150 °C
Weight				2 g	
M_D	mounting torque		0.4		0.6 Nm
F_c	mounting force with clip		20		60 N

1) I_{RMS} is typically limited by the pin-to-chip resistance (1); or by the current capability of the chip (2).
In case of (1) and a common cathode/anode configuration with a non-isolated backside,
the current capability can be increased by connecting the backside.

Product Marking

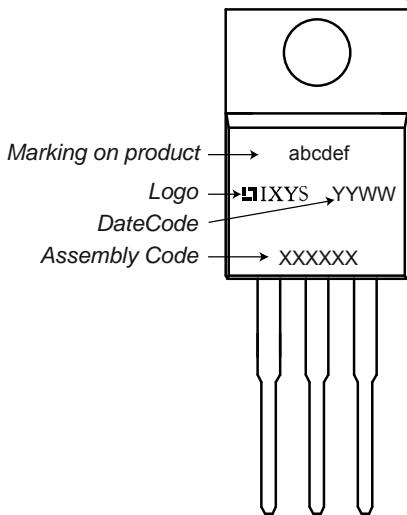


Part number

D = Diode
S = Schottky Diode
A = low VF
10 = Current Rating [A]
C = Common Cathode
150 = Reverse Voltage [V]
PB = TO-220AB (3)

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Code Key
Standard	DSA 10 C 150 PB	DSA10C150PB	Tube	50	509188

Outlines TO-220

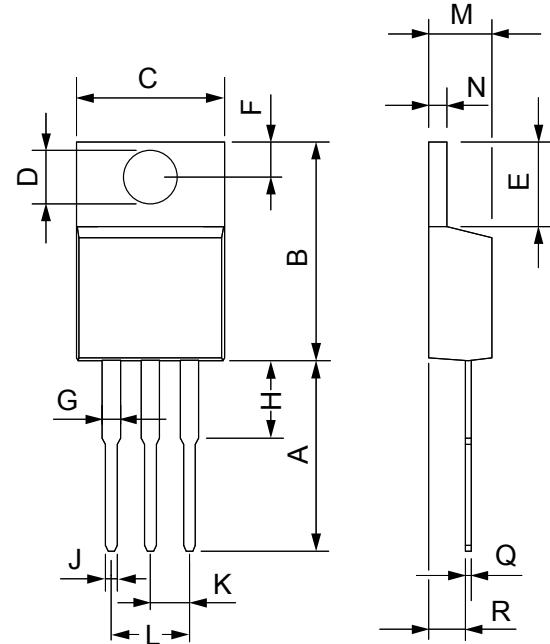

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	12.70	13.97	0.500	0.550
B	14.73	16.00	0.580	0.630
C	9.91	10.66	0.390	0.420
D	3.54	4.08	0.139	0.161
E	5.85	6.85	0.230	0.270
F	2.54	3.18	0.100	0.125
G	1.15	1.65	0.045	0.065
H	2.79	5.84	0.110	0.230
J	0.64	1.01	0.025	0.040
K	2.54	BSC	0.100	BSC
M	4.32	4.82	0.170	0.190
N	1.14	1.39	0.045	0.055
Q	0.35	0.56	0.014	0.022
R	2.29	2.79	0.090	0.110