


Standard Rectifier

3 ~ Rectifier	
V_{RRM}	= 1600 V
I_{DAV}	= 40 A
I_{FSM}	= 370 A


3~ Rectifier Bridge


Part number

GUO40-16NO1

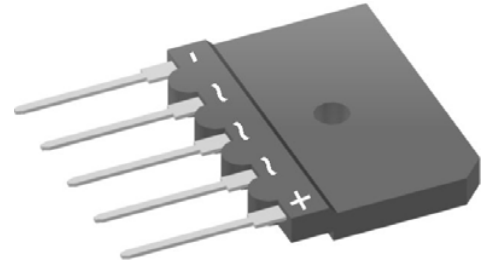

Backside: isolated

 E326641

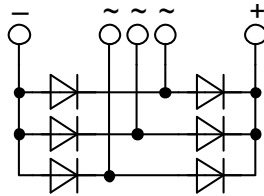

Features / Advantages:

- Low forward voltage drop
- Planar passivated chips
- Easy to mount with one screw
- Space and weight savings

Applications:


- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Package:

- Housing: GUPF
- Industry standard outline
- Plastic overmolded tab for electrical isolation
- Isolation Voltage 2500 V
- Epoxy meets UL 94V-0
- RoHS compliant


Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage		$T_{VJ} = 25^{\circ}\text{C}$			1700	V
V_{RRM}	max. repetitive reverse blocking voltage		$T_{VJ} = 25^{\circ}\text{C}$			1600	V
I_R	reverse current, drain current	$V_R = 1600\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			50	μA
		$V_R = 1600\text{ V}$	$T_{VJ} = 150^{\circ}\text{C}$			1.5	mA
V_F	forward voltage drop	$I_F = 12.5\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.15	V
		$I_F = 25\text{ A}$				1.30	V
		$I_F = 12.5\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.05	V
		$I_F = 25\text{ A}$				1.20	V
I_{DAV}	bridge output current	$T_C = 85^{\circ}\text{C}$ 120° sine	$T_{VJ} = 175^{\circ}\text{C}$			40	A
V_{FO}	threshold voltage	} for power loss calculation only	$T_{VJ} = 175^{\circ}\text{C}$			0.86	V
r_F	slope resistance					12.9	m Ω
R_{thJC}	thermal resistance junction to case					4.30	K/W
R_{thCH}	thermal resistance case to heatsink				0.50		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			35	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			370	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			400	A
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 175^{\circ}\text{C}$			315	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			340	A
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			685	A ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			665	A ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 175^{\circ}\text{C}$			495	A ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			480	A ² s
C_J	junction capacitance	$V_R = 400\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		11		pF

Package GUPP		Ratings				
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			70	A
T_{stg}	storage temperature		-55		150	°C
T_{vj}	virtual junction temperature		-40		175	°C
Weight				8.5		g
M_D	mounting torque		0.8		1.2	Nm
F_C	mounting force with clip		20		120	N
V_{ISOL}	isolation voltage	t = 1 second	2500			V
		t = 1 minute	2000			V
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	6.7	5.4		mm
$d_{Spb/Apb}$		terminal to backside	10.0	8.0		mm

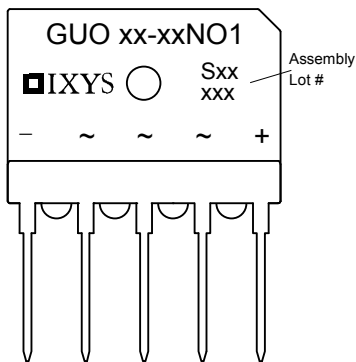


Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	GUO40-16NO1	GUO40-16NO1	Tube	15	504437

Similar Part	Package	Voltage class
GUO40-12NO1	GUPP	1200
GUO40-08NO1	GUPP	800


Equivalent Circuits for Simulation
 $T_{vj} = 175^{\circ}C$

Rectifier

$V_{0\max}$	threshold voltage	0.86	V
$R_{0\max}$	slope resistance	10.3	mΩ

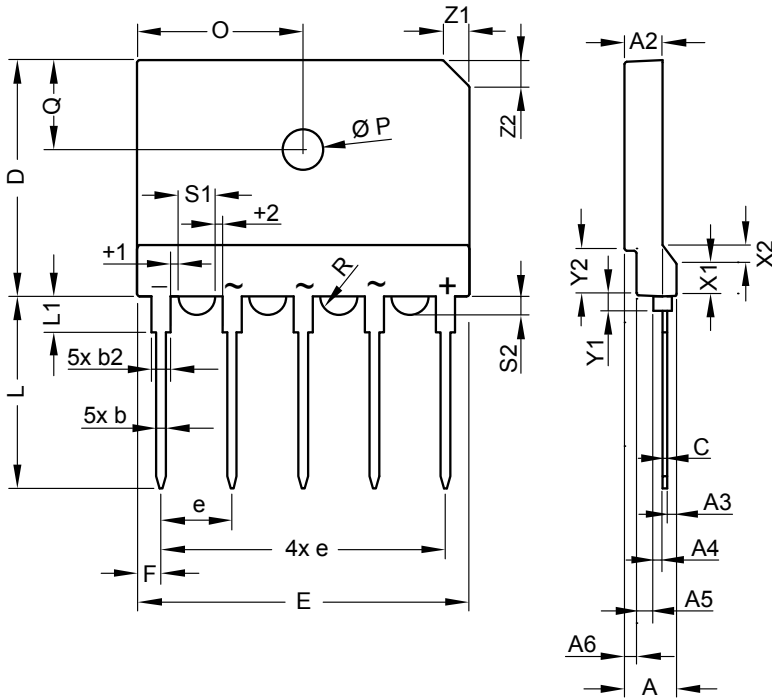Outlines GUPF

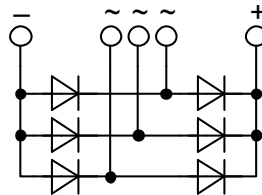

Dim.	Millimeter			Inches		
	min	typ.	max	min	typ.	max
A	5.40	5.50	5.60	0.213	0.217	0.221
A2	3.90	4.00	4.10	0.154	0.158	0.162
A3	0.95	1.00	1.10	0.037	0.039	0.043
A4	0.95	1.00	1.05	0.037	0.039	0.041
A5	1.60	1.70	1.80	0.063	0.067	0.071
A6	1.25	1.30	1.35	0.049	0.051	0.053
b	0.95	1.00	1.05	0.037	0.039	0.041
b2	1.95	2.00	2.05	0.077	0.079	0.081
C	0.45	0.50	0.55	0.018	0.020	0.022
D	24.80	25.00	25.20	0.977	0.985	0.993
E	34.70	35.00	35.30	1.367	1.379	1.391
e	BSC 7.50			BSC 0.296		
F	2.40	2.50	2.60	0.095	0.099	0.102
L	20.30	20.40	20.50	0.800	0.804	0.808
L1	3.70	3.75	3.80	0.146	0.148	0.150
O	17.40	17.50	17.60	0.686	0.690	0.693
ØP	4.10	4.20	4.30	0.162	0.165	0.169
Q	9.20	9.30	9.40	0.362	0.366	0.370
$\phi_{1/2}R$	1.77			0.070		
s1	3.45	3.50	3.55	0.136	0.138	0.140
s2	1.45	1.50	1.55	0.057	0.059	0.061
t1	0.95	1.00	1.05	0.037	0.039	0.041
t2	0.95	1.00	1.05	0.037	0.039	0.041
x1	3.20	3.30	3.40	0.126	0.130	0.134
x2	1.90	2.00	2.10	0.075	0.079	0.083
y1	1.60	1.65	1.70	0.063	0.065	0.067
y2	4.65	4.70	4.75	0.183	0.185	0.187
z1	2.80	2.90	3.00	0.110	0.114	0.118



Rectifier

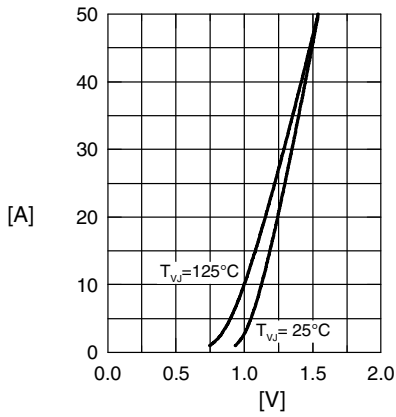


Fig. 1 Forward current versus voltage drop per diode

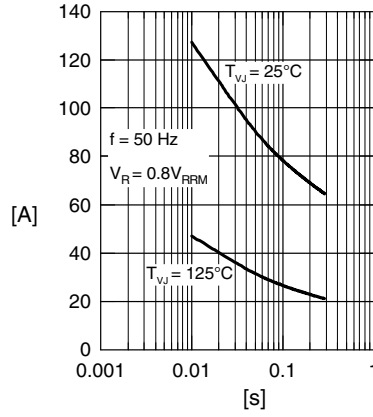


Fig. 2 Surge overload current

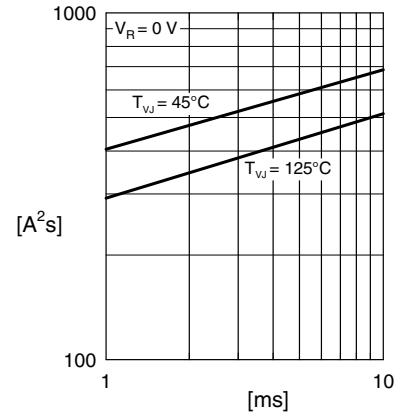


Fig. 3 I^2t versus time per diode

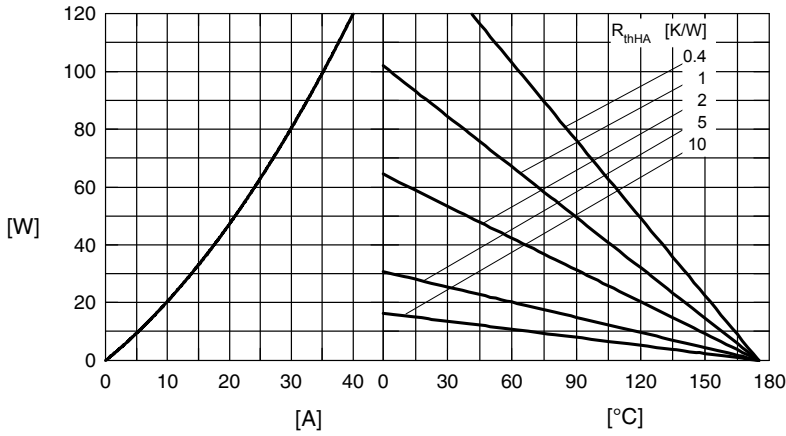


Fig. 4 Power dissipation versus direct output current and ambient temperature, sine 180°

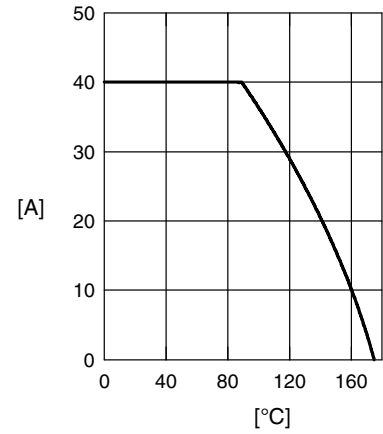


Fig. 5 Max. forward current vs. case temperature

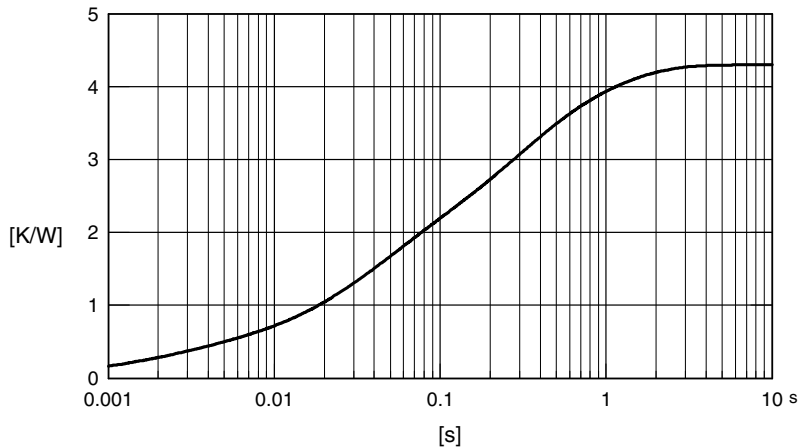


Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} [K/W]	t_i [s]
1	0.302	0.002
2	1.252	0.032
3	1.582	0.227
4	1.164	0.82