


**HiPerFRED**


High Performance Fast Recovery Diode  
Low Loss and Soft Recovery  
Phase leg

Part number

DSEE15-12CC



$$\begin{aligned} V_{RRM} &= 600 \text{ V} \\ I_{FAV} &= 15 \text{ A} \\ t_{rr} &= 25 \text{ ns} \end{aligned}$$

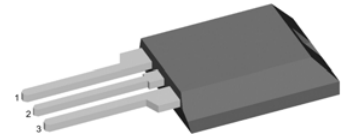

Backside: isolated

**Features / Advantages:**

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I<sub>rm</sub>-values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I<sub>rm</sub> reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

**Applications:**

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)


**Package:**

- Housing: ISOPLUS220
- Industry standard outline
- DCB isolated backside
- Isolation Voltage 3000 V
- Epoxy meets UL 94V-0
- RoHS compliant

E72873


Symbol	Definition	Conditions	Ratings			Unit
			min.	typ.	max.	
$V_{RRM}$	max. repetitive reverse voltage				600	V
$I_R$	reverse current	$V_R = 600 \text{ V}$			100	$\mu\text{A}$
		$V_R = 600 \text{ V}$			0.5	mA
$V_F$	forward voltage	$I_F = 15 \text{ A}$			2.04	V
		$I_F = 30 \text{ A}$			2.25	V
		$I_F = 15 \text{ A}$			1.35	V
		$I_F = 30 \text{ A}$			1.59	V
$I_{FAV}$	average forward current	rectangular d = 0.5			15	A
$V_{FO}$	threshold voltage	} for power loss calculation only			0.99	V
$r_F$	slope resistance				15	m $\Omega$
$R_{thJC}$	thermal resistance junction to case				1.60	K/W
$T_{VJ}$	virtual junction temperature		-55		175	$^{\circ}\text{C}$
$P_{tot}$	total power dissipation				95	W
$I_{FSM}$	max. forward surge current	t = 10 ms (50 Hz), sine			110	A
$I_{RM}$	max. reverse recovery current				11	A
		$I_F = 15 \text{ A}; V_R = 300 \text{ V}$			19	A
$t_{rr}$	reverse recovery time	-di <sub>F</sub> /dt = 600 A/ $\mu\text{s}$			25	ns
					83	ns
$C_J$	junction capacitance	$V_R = 400 \text{ V}; f = 1 \text{ MHz}$			12	pF

Symbol	Definition	Conditions	Ratings			Unit
			min.	typ.	max.	
$I_{RMS}$	RMS current	per terminal			35	A
$R_{thCH}$	thermal resistance case to heatsink			0.50		K/W
$T_{stg}$	storage temperature		-55		150	°C
<b>Weight</b>				2		g
$F_C$	mounting force with clip		20		60	N
$V_{ISOL}$	isolation voltage	t = 1 second	3600			V
		t = 1 minute	3000			V
$d_{Spp/App}$	creepage   striking distance on surface   through air	terminal to terminal	1.0			mm
$d_{Spb/Apb}$	creepage   striking distance on surface   through air	terminal to backside	3.0			mm

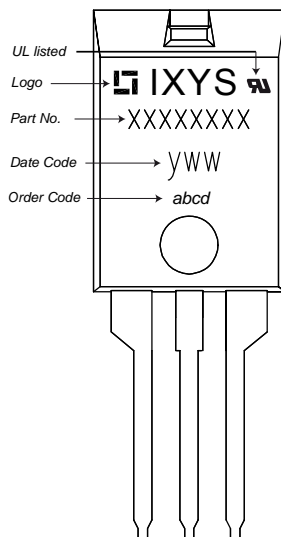**Product Marking**


Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Code Key
Standard	DSEE15-12CC	DSEE15-12CC	Tube	50	500725

**Outlines ISOPLUS220**

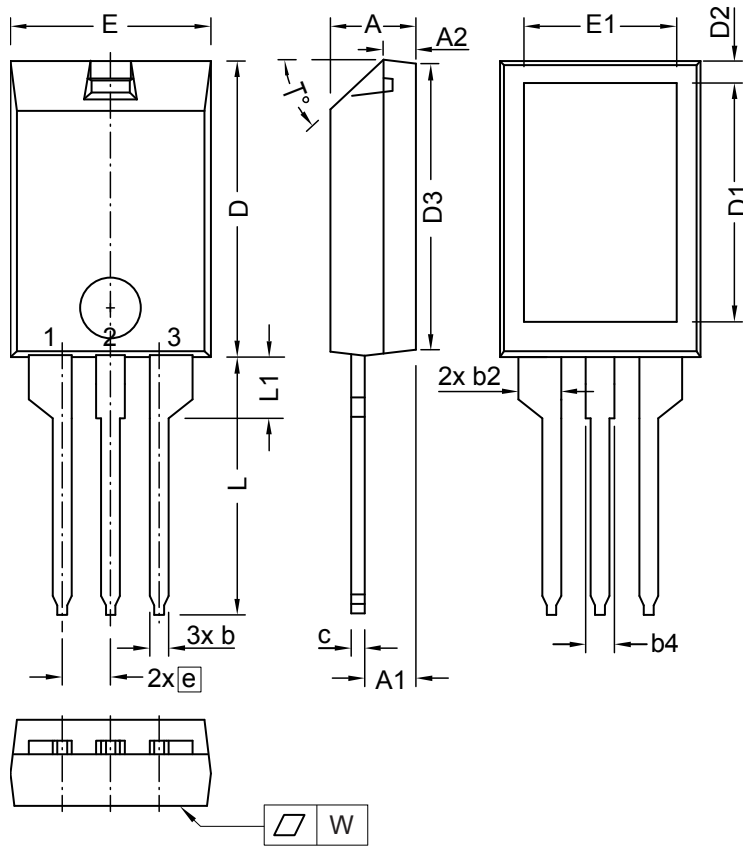

Dim.	Millimeters		Inches	
	min	max	min	max
A	4.00	5.00	0.157	0.197
A1	2.50	3.00	0.098	0.118
A2	1.60	1.80	0.063	0.071
b	0.90	1.30	0.035	0.051
b2	2.35	2.55	0.093	0.100
b4	1.25	1.65	0.049	0.065
c	0.70	1.00	0.028	0.039
D	15.00	16.00	0.591	0.630
D1	12.00	13.00	0.472	0.512
D2	1.10	1.50	0.043	0.059
D3	14.90	15.50	0.587	0.610
E	10.00	11.00	0.394	0.433
E1	7.50	8.50	0.295	0.335
e	2.54 BSC		0.100 BSC	
L	13.00	14.50	0.512	0.571
L1	3.00	3.50	0.118	0.138
T°	42.5	47.5		
W	-	0.1	-	0.004

Die konvexe Form des Substrates ist typ. < 0.04 mm über der Kunststoffoberfläche der Bauteilunterseite  
 The convex bow of substrate is typ. < 0.04 mm over plastic surface level of device bottom side

Die Gehäuseabmessungen entsprechen dem Typ TO-273 gemäß JEDEC außer D und D1.  
 This drawing will meet all dimensions requirement of JEDEC outline TO-273 except D and D1.

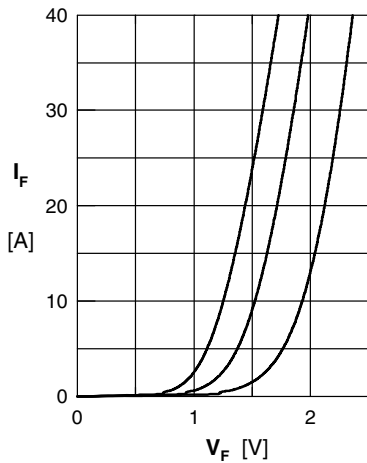


Fig. 1 Forward current  $I_F$  vs.  $V_F$

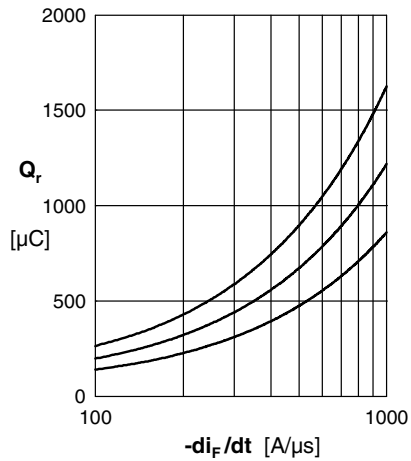


Fig. 2 Typ. reverse recovery charge  $Q_{rr}$  versus  $-di_F/dt$

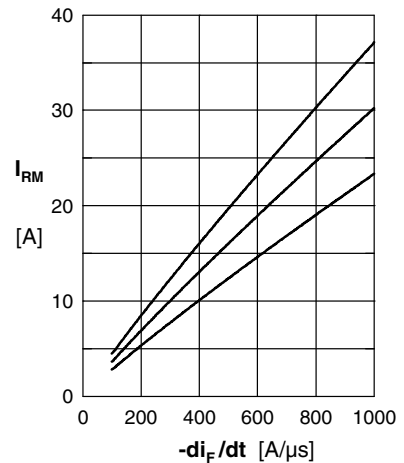


Fig. 3 Typ. peak reverse current  $I_{RRM}$  versus  $-di_F/dt$

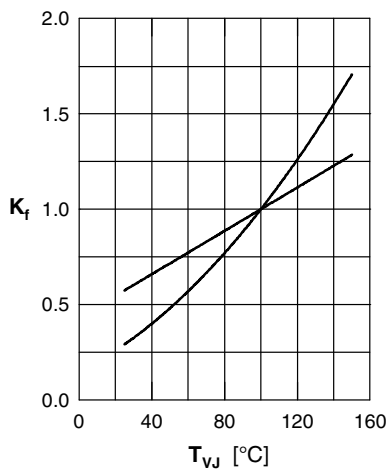


Fig. 4 Dynamic parameters  $K_f, I_{RRM}$  versus  $T_{VJ}$

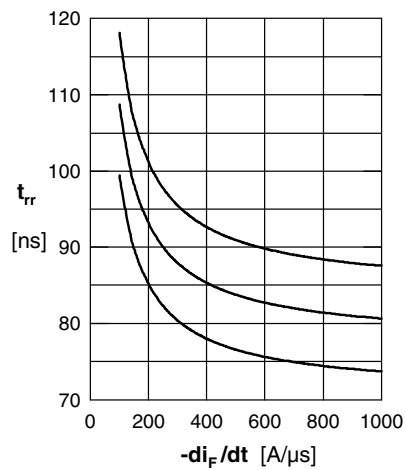


Fig. 5 Typ. recovery time  $t_{rr}$  versus  $-di_F/dt$

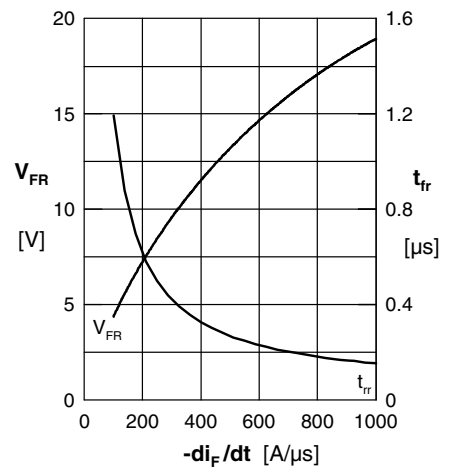


Fig. 6 Typ. peak forward voltage  $V_{FR}$  and typ. forward recovery time  $t_{fr}$  versus  $di_F/dt$

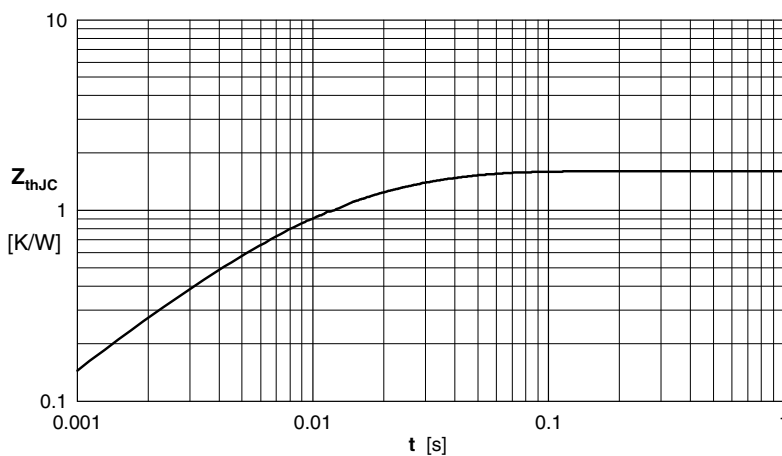


Fig. 7 Transient thermal impedance junction to case

Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.908	0.0052
2	0.350	0.0003
3	0.342	0.017