

The T9G0 SCR employs a Center-Fired amplifying gate structure which allows the SCR to be reliably operated at high di/dt and high dv/dt conditions in phase control applications.

FEATURES:

- Low On-State Voltage
- High di/dt Capability
- High dv/dt Capability
- Hermetic Ceramic Package
- Excellent Surge and I²t Ratings

APPLICATIONS:

- DC Power Supplies
- Plating Supplies
- Welding Supplies

ORDERING INFORMATION

Select the complete 12 digit Part Number using the table below.
 EXAMPLE: **T9G0082403DH** is an 800V-2400A SCR with 200ma IGT and 12 inch gate and cathode potential leads.

PART	Voltage Rating $V_{DRM}-V_{RRM}$	Voltage Code	Current Rating I_{tavg}	Current Code	Turn-Off T_q	Gate I_{GT}	Leads
T9G0	800V	08	2400A	24	0	3	DH
	600V	06					
	400V	04			400us typ.	200ma	12"

Absolute Maximum Ratings

Characteristic	Symbol	Rating	Units
Repetitive Peak Voltage	$V_{DRM}-V_{RRM}$	800	Volts
Average On-State Current, $T_C=75^\circ\text{C}$	$I_{T(Avg.)}$	2400	A
RMS On-State Current, $T_C=75^\circ\text{C}$	$I_{T(RMS)}$	3770	A
Average On-State Current, $T_C=55^\circ\text{C}$	$I_{T(Avg.)}$	2800	A
RMS On-State Current, $T_C=55^\circ\text{C}$	$I_{T(RMS)}$	4398	A
Peak One Cycle Surge Current, 60Hz, $V_R=0V$	I_{TSM}	27,000	A
Peak One Cycle Surge Current, 50Hz, $V_R=0V$	I_{TSM}	25,456	A
Fuse Coordination I^2t , 60Hz	I^2t	3.04E+06	A^2s
Fuse Coordination I^2t , 50Hz	I^2t	3.24E+06	A^2s
Critical Rate-of-Rise of On-State Current Repetitive	di/dt	100	A/us
Critical Rate-of-Rise of On-State Current Non-Repetitive	di/dt	200	A/us
Peak Gate Power, 100us	P_{GM}	16	Watts
Average Gate Power	$P_{G(avg)}$	5	Watts
Operating Temperature	T_j	-20 to+140	$^\circ\text{C}$
Storage Temperature	$T_{Stg.}$	-50 to+150	$^\circ\text{C}$
Approximate Weight		1	lb
		0.45	Kg
Mounting Force		5500-6000	lbs
		24.5 - 26.7	Knewtons

Information presented is correct to the knowledge and capabilities of the manufacturer. This information is subject to change without notice. The manufacturer makes no claim as to suitability for use, reliability, capability or future availability of this product.


Electrical Characteristics, Tj=25°C unless otherwise specified

Characteristic	Symbol	Test Conditions	Rating			Units
			min	typ	max	
Repetitive Peak Forward Leakage Current	I_{DRM}	Tj=140°C, V_{DRM} =Rated			150	ma
Repetitive Peak Reverse Leakage Current	I_{RRM}	Tj=140°C, V_{RRM} =Rated			100	ma
Peak On-State Voltage	V_{TM}	Tj=25°C, I_{TM} =1500A			1.10	V
V_{TM} Model, Low Level	V_0	Tj=140°C			0.722	V
$V_{TM} = V_0 + r \cdot I_{TM}$	r	15% $I_{TM} - \pi \cdot I_{TM}$			8.83E-02	mΩ
V_{TM} Model, High Level	V_0	Tj=140°C			0.784	V
$V_{TM} = V_0 + r \cdot I_{TM}$	r	$\pi \cdot I_{TM} - I_{TSM}$			7.11E-02	mΩ
V_{TM} Model, 4-Term	A	Tj=140°C			-0.342	
$V_{TM} = A + B \cdot \ln(I_{TM}) +$	B	15% $I_{TM} - I_{TSM}$			0.199	
$C \cdot (I_{TM}) + D \cdot (I_{TM})^{1/2}$	C				9.66E-05	
	D				-9.62E-03	
Turn-On Delay Time	t_d	$V_D = 0.5 \cdot V_{DRM}$ Gate Drive: 40V - 20Ω			1.5	us
Turn-Off Time	tq	Tj=125°C dv/dt = 20V/us to 80% V_{DRM}			400	us
dv/dt _(crit)	dv/dt	Tj=140°C Exp. Waveform $V_D = 80\%$ Rated			300	V/us
Gate Trigger Current	I_{GT}	Tj=25°C $V_D = 12V$	30	90	200	ma
Gate Trigger Voltage	V_{GT}		0.6	1.6	3.0	V
Peak Reverse Gate Voltage	V_{GRM}				5	V


Thermal Characteristics

Characteristic	Symbol	Test Conditions	Rating			Units															
			min	typ	max																
Thermal Resistance																					
Junction to Case	$R\theta_{jc}$	Double side cooled		0.021	0.023	°C/Watt															
Case to Sink	$R\theta_{cs}$	Double side cooled		0.004	0.006	°C/Watt															
Thermal Impedance Model	$Z\theta_{jc}$	Double side cooled																			
$Z\theta_{jc}(t) = \Sigma(A(N) \cdot (1 - \exp(-t/\text{Tau}(N))))$ where: <table style="display: inline-table; vertical-align: middle;"> <tr> <td>N =</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>A(N) =</td> <td>2.55E-03</td> <td>6.19E-03</td> <td>7.75E-03</td> <td>5.95E-03</td> </tr> <tr> <td>Tau(N) =</td> <td>4.04E-05</td> <td>8.75E-02</td> <td>9.79E-01</td> <td>6.88E+00</td> </tr> </table>							N =	1	2	3	4	A(N) =	2.55E-03	6.19E-03	7.75E-03	5.95E-03	Tau(N) =	4.04E-05	8.75E-02	9.79E-01	6.88E+00
N =	1	2	3	4																	
A(N) =	2.55E-03	6.19E-03	7.75E-03	5.95E-03																	
Tau(N) =	4.04E-05	8.75E-02	9.79E-01	6.88E+00																	


Maximum On-State Voltage Drop

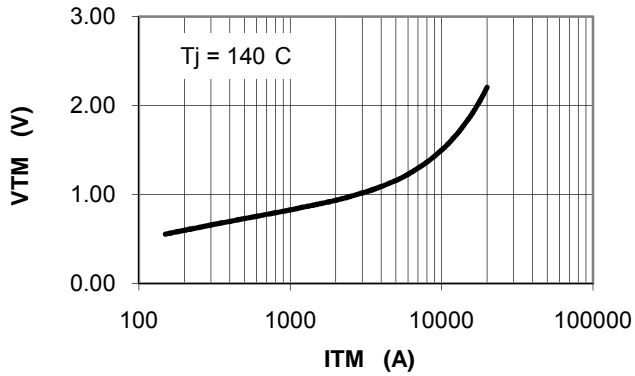

MAXIMUM TRANSIENT THERMAL IMPEDANCE

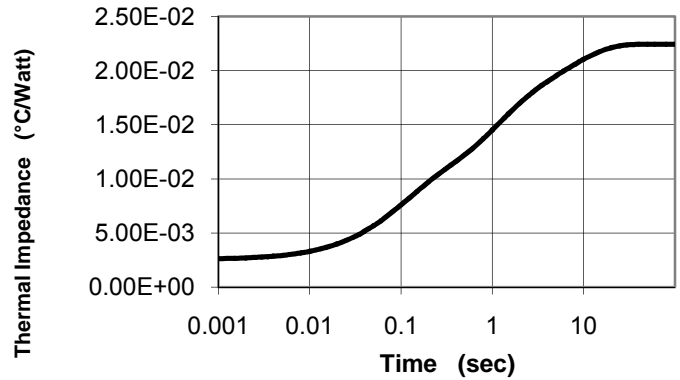


Maximum On-State Power Dissipation

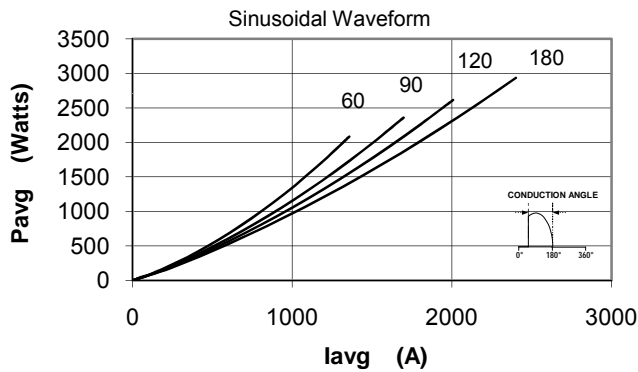


Maximum Allowable Case Temperature

Sinusoidal Waveform

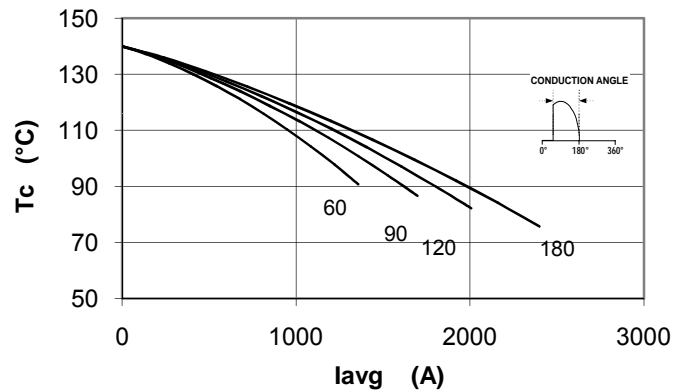

Maximum On-State Power Dissipation

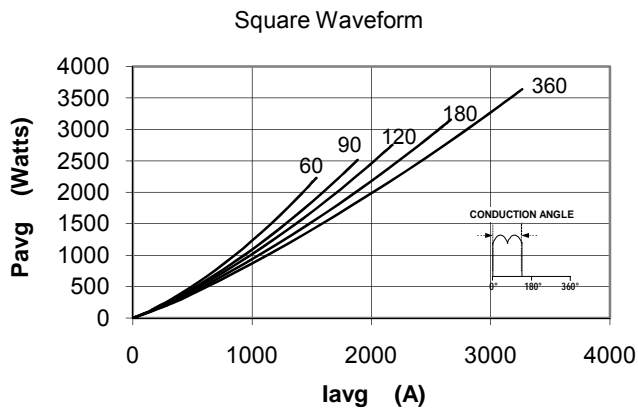

Maximum Allowable Case Temperature

Square Waveform

