


Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697-1800 (724) 925-7272  
 www.pwrx.com

**Fast Recovery Diode Module**  
**100 Amp/3300 Volts**

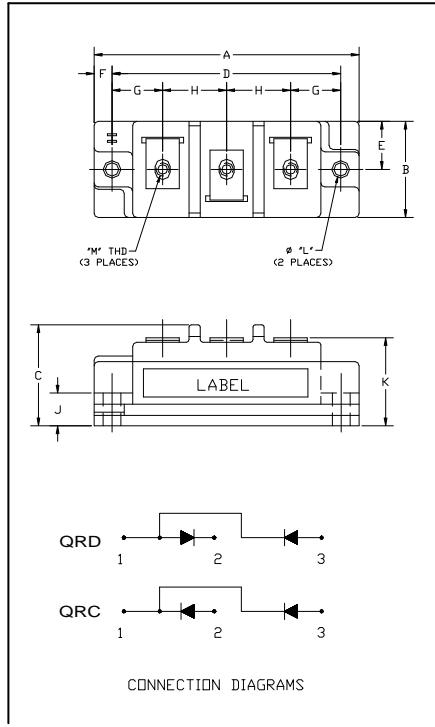

**QR\_3310001**  
**Fast Recovery Diode**  
**Module**  
 100 Amperes / 3300 Volts

**Description:**

Powerex Fast Recovery Diode Modules are designed for use in applications requiring fast switching. The modules are isolated for easy mounting with other components on a common heatsink.

**Features:**

- Fast Recovery Time (1.2  $\mu$ s max.)
- Isolation Material – DBC AlN
- Copper Baseplate
- Low Thermal Impedance
- 6000 V Isolated Mounting

**Applications:**

- Switching Power Supplies
- Inverters
- Choppers
- Welding Power Supplies
- Free Wheeling Diode
- High Frequency Rectifiers

Dimensions	Inches	Millimeters
A	3.70	94
B	1.34	34
C	1.40	35.6
D	3.15	80
E	0.67	17
F	0.28	6.99
G	0.67	17.1
H	0.91	23
J	0.36	9.0
K	1.18	30
L	0.216	5.5
M	#10-32	#10-32

Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697-1800 (724) 925-7272  
 www.pwr.com

**Fast Recovery Diode Module**  
**100 Amp/3300 Volts**
**Absolute Maximum Ratings,  $T_J=25^\circ\text{C}$  unless otherwise specified**

Characteristics	Conditions	Symbol	QRD330001	Units
			QRC330001	
Repetitive Peak Reverse Blocking Voltage	-	$V_{RRM}$	3300	Volts
Non-Repetitive Peak Reverse Blocking Voltage	-	$V_{RSM}$	$V_{RRM} + 100$	Volts
Average Forward Current	$T_c=80^\circ\text{C}$	$I_{F(AV)}$	86	Amperes
	$T_c=63^\circ\text{C}$	$I_{F(AV)}$	100	Amperes
	$T_c=25^\circ\text{C}$	$I_{F(AV)}$	127	Amperes
Forward Current	Pulse	$I_{FM}$	200	Amperes
Operating Junction Temperature	-	$T_J$	-40 to 150	$^\circ\text{C}$
Storage Temperature	-	$T_{STG}$	-40 to 150	$^\circ\text{C}$
Maximum Mounting Torque, #10-32 Mounting Screw	-	-	26	In.-lb.
Maximum Terminal Torque, #10-32 Terminal Screw	-	-	26	In.-lb.
Module Weight (Typical)	-	-	250	Grams
V Isolation	60 Hz, circuit to base, all terminals shorted, $t = 1$ sec	$V_{RMS}$	6000	Volts

**Electrical Characteristics,  $T_J=25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Peak Reverse Leakage Current	$I_{RRM}$	Rated $V_{RRM}$	-	-	5	mA
Peak On-State Voltage	$V_{FM}$	$I_F=100\text{A}$	-	3.3	4.3	Volts
Reverse Recovery Time	$t_{rr}$	$I_F = 100\text{A}$ , $di/dt = -200\text{A}/\mu\text{s}$	-	-	1.2	$\mu\text{s}$
Reverse Recovery Charge	$Q_{rr}$	$I_F = 100\text{A}$ , $di/dt = -200\text{A}/\mu\text{s}$	-	25	-	$\mu\text{C}$


**Thermal Characteristics,  $T_J=25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol		Min.	Typ.	Max.	Units
Thermal Resistance, Junction to Case	$R_{\theta JC}$	Per Diode	-	-	0.12	$^\circ\text{C}/\text{Watt}$
Thermal Resistance, Case to Sink Lubricated	$R_{\theta CS}$	Per Module	-	-	0.05	$^\circ\text{C}/\text{Watt}$


Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697-1800 (724) 925-7272  
www.pwr.com

### Fast Recovery Diode Module 100 Amp/3300 Volts


Maximum On-State Forward Voltage Drop  
( $T_j = 150^\circ\text{C}$ )

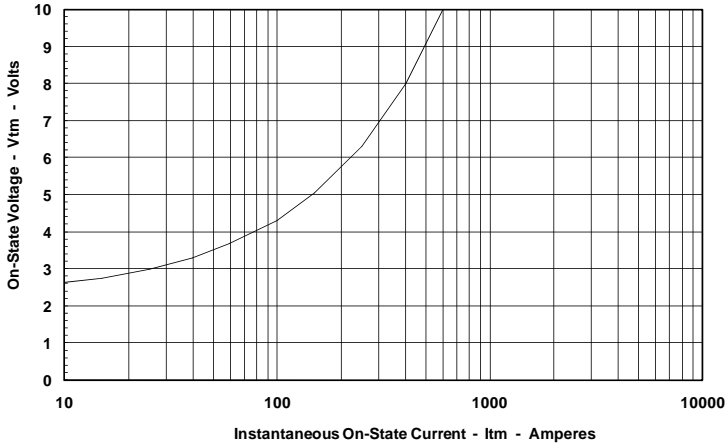


Maximum Transient Thermal Impedance  
(Junction to Case)

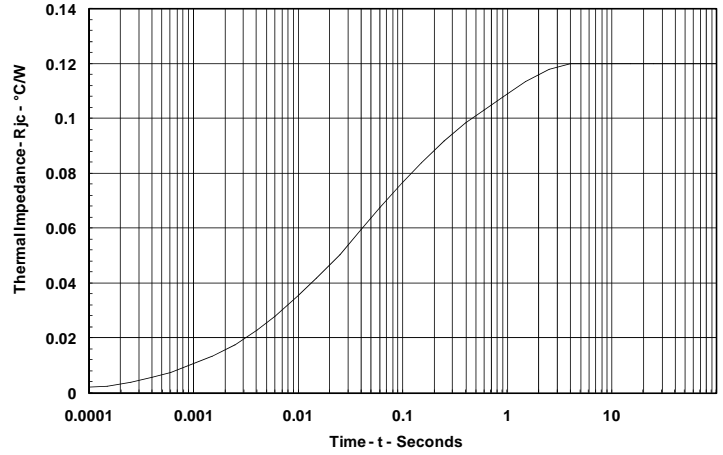


Maximum On-State Power Dissipation  
(Sinusoidal Waveform)

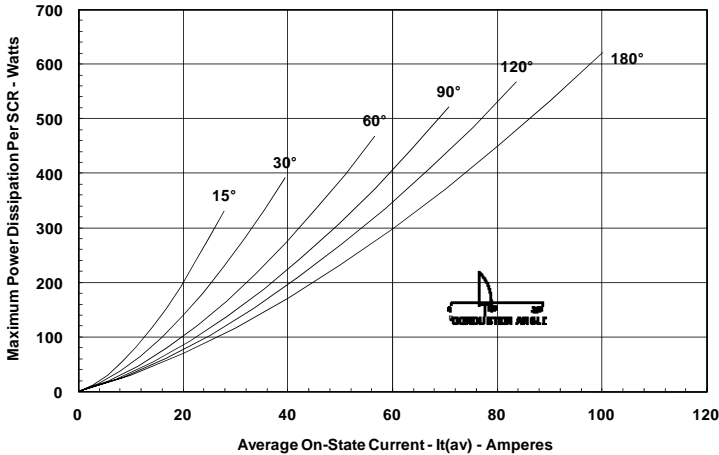

Maximum Allowable Case Temperature  
(Sinusoidal Waveform)

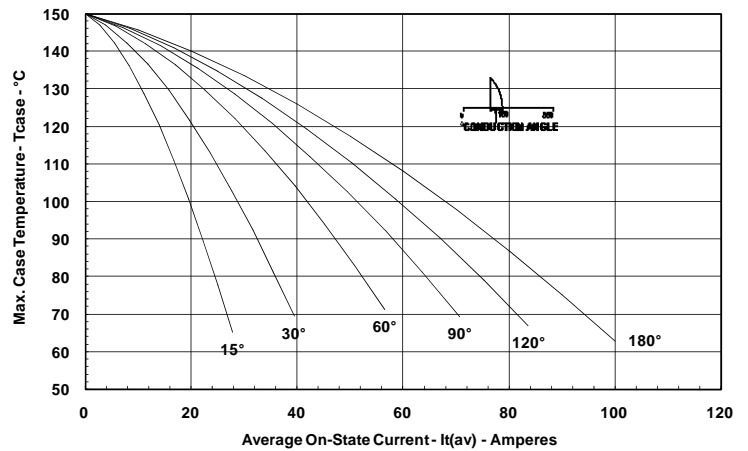

Maximum On-State Power Dissipation  
(Rectangular Waveform)

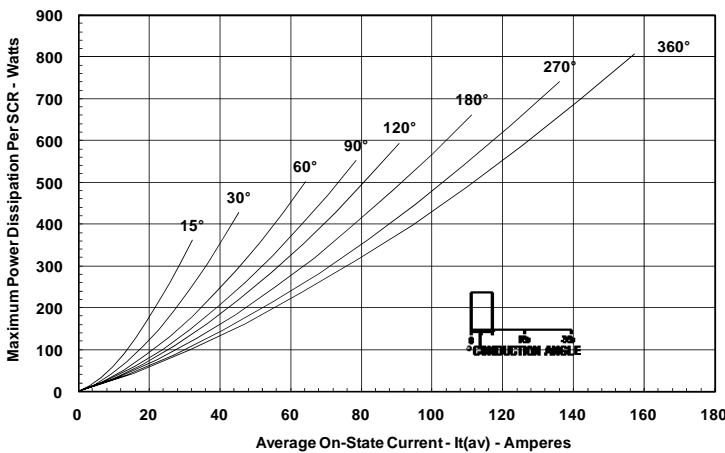

Maximum Allowable Case Temperature  
(Rectangular Waveform)

