

PRODUCT SPECIFICATION

Model No.: FYL-5463PURD1B

Descriptions:

- Dice material: AlGaInP.
- Emitting Color: Super bright Red.
- Device Outline: $\Phi 5 \times 4$ mm ellipse type.
- Lens Type: Red diffused.



| CUSTOMER APPROVED SIGNATURES | APPROVED BY | CHECKED BY | PREPARED BY |
|---------------------------------|-------------|------------|-------------|
| | | | |

NINGBO FORYARD OPTOELECTRONICS CO.,LTD.

Add: NO.115 Qixin Road Ningbo Zhejiang China

Zip: 315051

Tel: 0086-574-87933652 87927870 87922206

Fax: 0086-574-87927917

E-mail: Sales@foryard.com (General)


[Http://www.foryard.com](http://www.foryard.com)

[Http://www.foryard.com](http://www.foryard.com)

■ Features

1. Low power consumption.
2. High efficiency.
3. General purpose leads.
4. High intensity.
5. RoHs compliant.

■ Package configuration

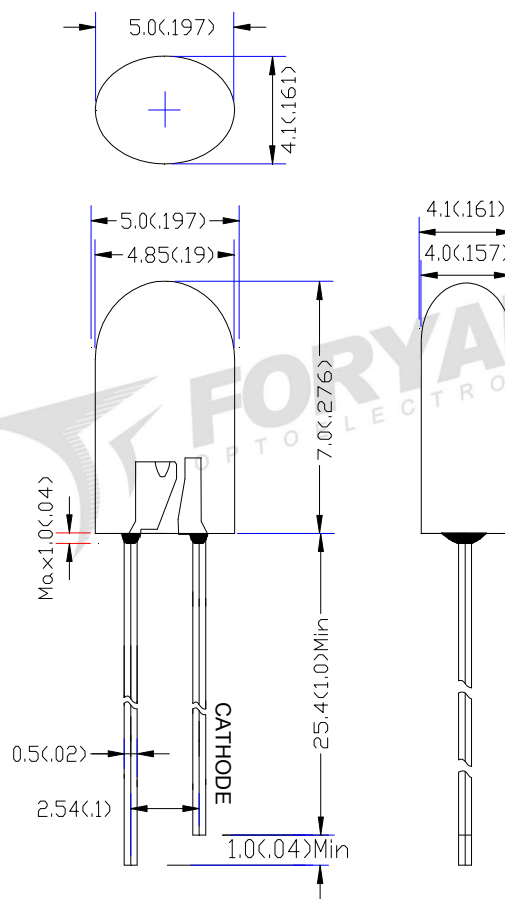

Notes:

1. All dimensions are millimeters (inches)
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

■ Absolute maximum ratings($T_a=25\text{ }^{\circ}\text{C}$)


| Parameter | MAX. | Unit |
|---|---------------------|-------|
| Power Dissipation | 75 | mW |
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | 100 | mA |
| Continuous Forward Current | 30 | mA |
| Derating Linear From 50°C | 0.4 | mA/°C |
| Reverse Voltage | 5 | V |
| Operating Temperature Range | -40°C to +85°C | |
| Storage Temperature Range | -40°C to +100°C | |
| Lead Soldering Temperature[4mm(.157") From Body] | 260°C for 5 Seconds | |

■ Electrical and optical characteristics($T_a=25\text{ }^{\circ}\text{C}$)


| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|-----------------|------|------|------|---------------|-------------------|
| Luminous Intensity | I_v | — | 2500 | — | mcd | $I_F=20\text{mA}$ |
| Viewing Angle | $2\theta_{1/2}$ | X | 55 | — | Deg | |
| | | Y | 25 | | | |
| Peak Emission Wavelength | λ_p | — | 630 | — | nm | |
| Dominant Wavelength | λ_d | 620 | 625 | 630 | nm | |
| Spectral Line Half-Width | $\Delta\lambda$ | — | 15 | — | nm | |
| Forward Voltage | V_F | 1.7 | 2.0 | 2.5 | V | $V_R=5\text{V}$ |
| Reverse Current | I_R | | | 10 | μA | |

■ Typical Electrical Characteristics Curves




(25 °c Ambient Temperature Unless Otherwise Noted)

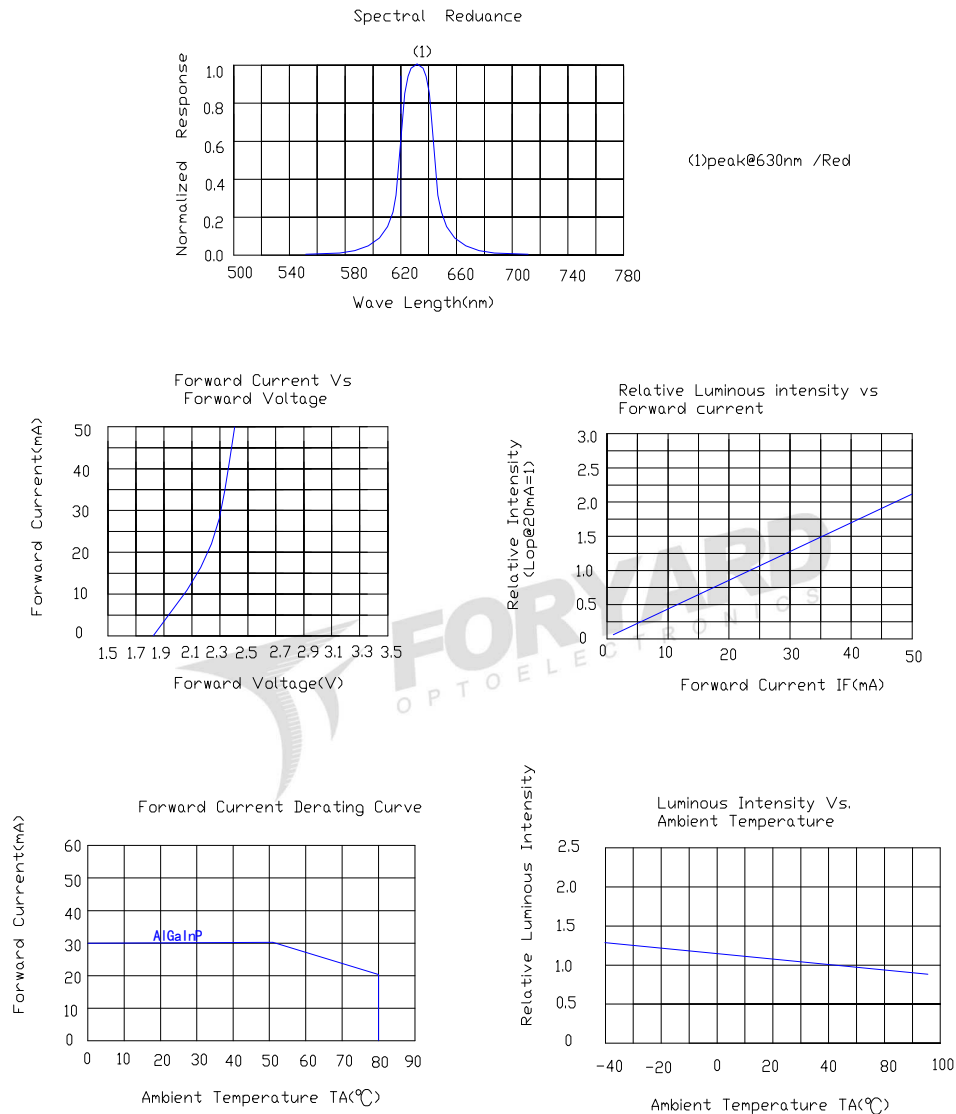

Radiation pattern.

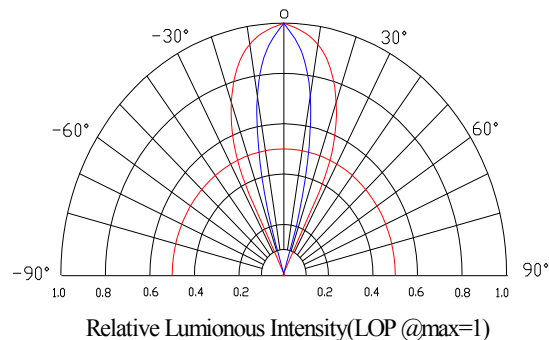

■ LAMP PACKING.

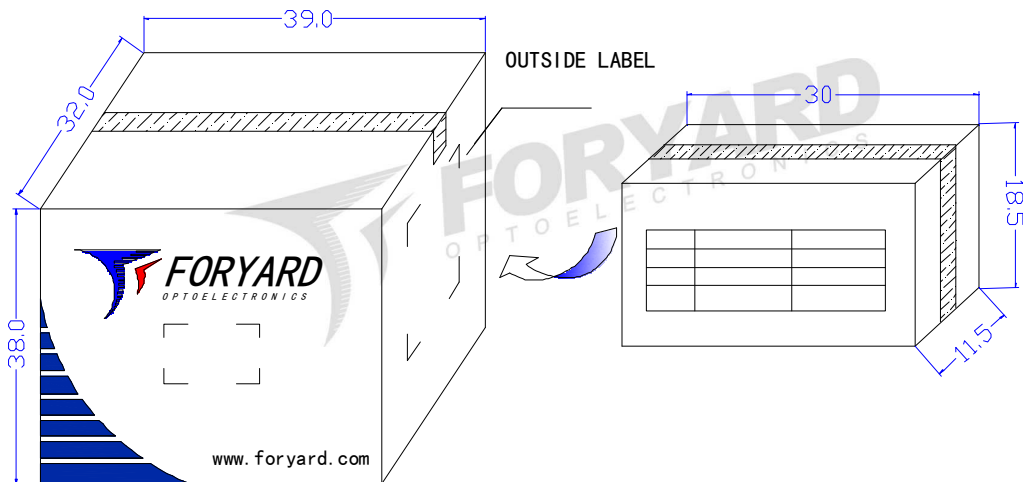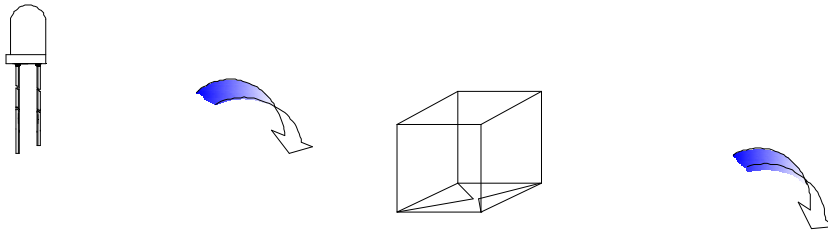

OUTSIDE LABEL