

HS1A - HS1M


1.0 AMP. High Efficient Surface Mount Rectifiers

SMA/DO-214AC



Features

- ◇ Glass passivated junction chip.
- ◇ For surface mounted application
- ◇ Low forward voltage drop
- ◇ Low profile package
- ◇ Built-in stain relief, ideal for automatic placement
- ◇ Fast switching for high efficiency
- ◇ High temperature soldering: 260°C/10 seconds at terminals
- ◇ Plastic material used carries Underwriters Laboratory Classification 94V0

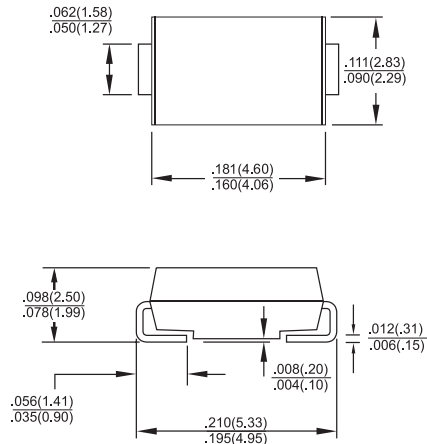

Mechanical Data

- ◇ Cases: Molded plastic
- ◇ Terminals: Pure tin plated, lead free
- ◇ Polarity: Indicated by cathode band
- ◇ Packing: 12mm tape per EIA STD RS-481
- ◇ Weight: 0.064 gram

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	HS 1A	HS 1B	HS 1D	HS 1F	HS 1G	HS 1J	HS 1K	HS 1M	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig.1	$I_{(AV)}$	1.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	30								A
Maximum Instantaneous Forward Voltage @ 1.0A	V_F	1.0			1.3		1.7			V
Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A = 125^\circ\text{C}$	I_R	5.0 150								uA uA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	50					75			nS
Typical Junction Capacitance (Note 2)	C_j	20					15			pF
Maximum Thermal Resistance (Note 3)	$R_{\theta JA}$	70								°C/W
Operating Temperature Range	T_J	-55 to +150								°C
Storage Temperature Range	T_{STG}	-55 to +150								°C

- Notes:
1. Reverse Recovery Test Conditions: $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$
 2. Measured at 1 MHz and Applied $V_R = 4.0$ Volts.
 3. Mounted on P.C.Board with 0.2" x 0.2" (5mm x 5mm) Copper Pad Area.

RATINGS AND CHARACTERISTIC CURVES (HS1A THRU HS1M)

FIG.1- MAXIMUM AVERAGE FORWARD CURRENT DERATING

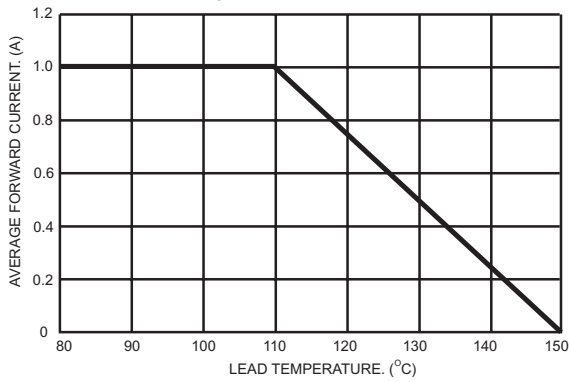


FIG.2- TYPICAL REVERSE CHARACTERISTICS

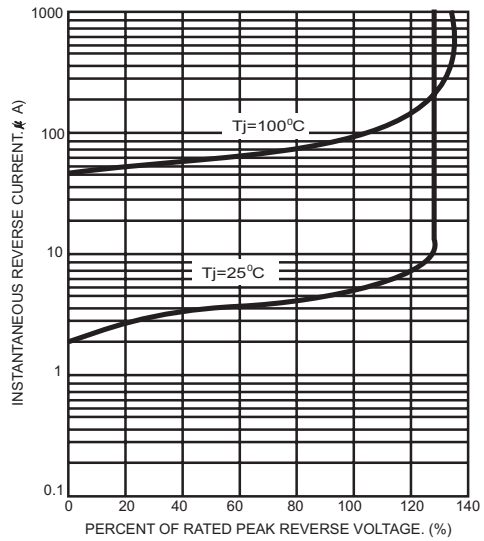


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

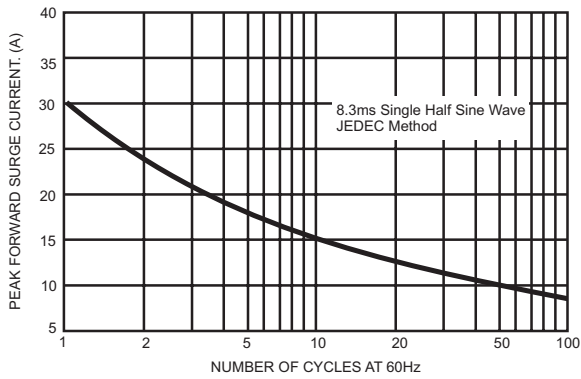


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

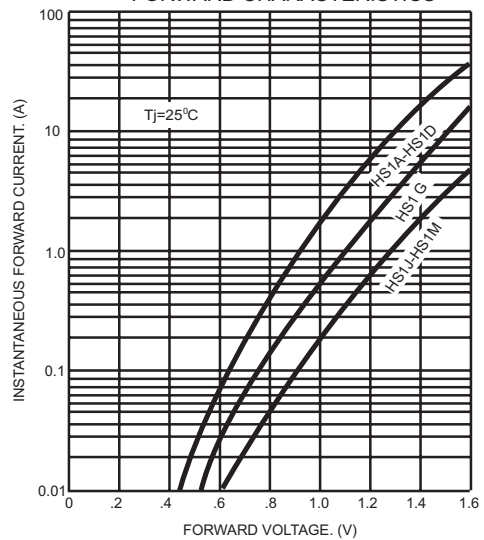


FIG.4- TYPICAL JUNCTION CAPACITANCE

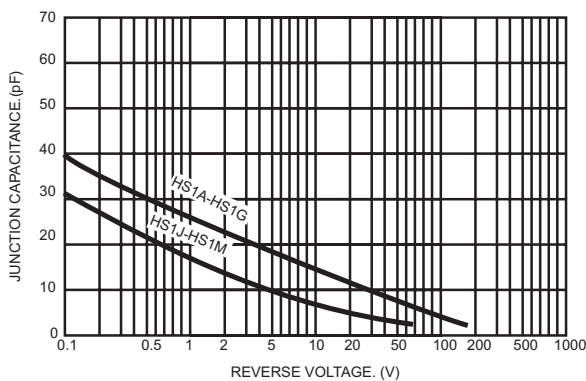


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

