

Field Effect Transistor

Silicon N Channel MOS Type (n-MOS II.5)

High Speed, High Current Switching Applications

Features

- Low Drain-Source ON Resistance
 - $R_{DS(ON)} = 1.8\Omega$ (Typ.)
- High Forward Transfer Admittance
 - $|Y_{fs}| = 3.0S$ (Typ.)
- Low Leakage Current
 - $I_{DSS} = -300\mu A$ (Max.) @ $V_{DS} = 640V$
- Enhancement-Mode
 - $V_{th} = 1.5 \sim 3.5V$ @ $V_{DS} = -10V, I_D = 1mA$

Absolute Maximum Ratings (Ta = 25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Drain-Source Voltage		V_{DSS}	800	V
Drain-Gate Voltage ($R_{DS} = 20k\Omega$)		V_{DGR}	800	V
Gate-Source Voltage		V_{GSS}	± 30	V
Drain Current	DC	I_D	5	A
	Pulse	I_{DP}	15	
Drain Power Dissipation (Tc = 25°C)		P_D	125	W
Channel Temperature		T_{ch}	150	°C
Storage Temperature Range		T_{stg}	-55 - 150	°C

Thermal Characteristics

CHARACTERISTIC	SYMBOL	MAX.	UNIT
Thermal Resistance, Channel to Case	$R_{\theta(ch-c)}$	1.0	°C/W
Thermal Resistance, Channel to Ambient	$R_{\theta(ch-a)}$	50	°C/W


This transistor is an electrostatic sensitive device. Please handle with caution.

Unit in mm

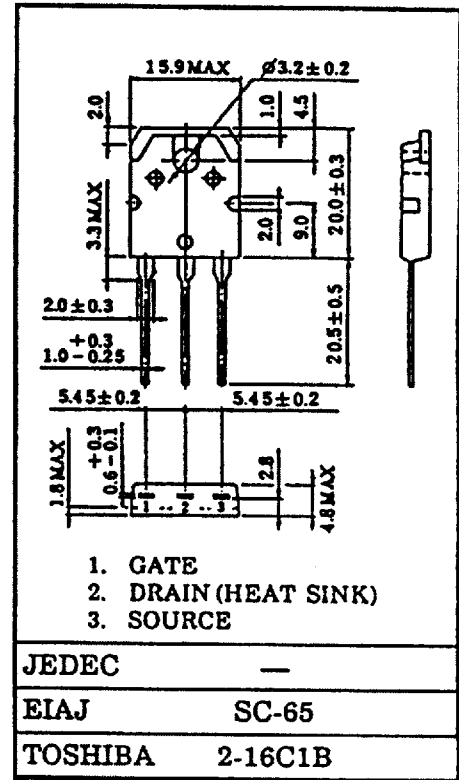

Weight : 4.6g

Electrical Characteristics (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GSS}	$V_{GS} = \pm 30V, V_{DS} = 0V$	-	-	± 100	nA
Drain Cut-off Current		I_{DSS}	$V_{DS} = 640V, V_{GS} = 0V$	-	-	300	μA
Drain-Source Breakdown Voltage		$V_{(BR)DSS}$	$I_D = 10mA, V_{GS} = 0V$	800	-	-	V
Gate Threshold Voltage		V_{th}	$V_{DS} = 10V, I_D = -1mA$	1.5	-	3.5	V
Drain-Source ON Resistance		$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 3A$	-	1.8	2.2	Ω
Forward Transfer Admittance		$ Y_{fs} $	$V_{DS} = 20V, I_D = 3A$	1.0	3.0	-	S
Input Capacitance		C_{iss}	$V_{DS} = 25V, V_{GS} = 0V,$ $f = 1MHz$	-	610	870	pF
Reverse Transfer Capacitance		C_{rss}		-	60	100	
Output Capacitance		C_{oss}		-	110	165	
Switching Time	Rise Time	t_r	 <p>$V_{GS} = 0V, V_{DS} = 25V, f = 1MHz$ $V_{DD} = 200V, I_D = 3A, R_L = 66.7\Omega$ $V_{IN} : t_r, t_f < 5ns, V_{DD} = 200V$ $Duty \leq 1\%, t_w = 10\mu s$</p>	-	30	60	ns
	Turn-on Time	t_{on}		-	70	140	
	Fall Time	t_f		-	35	70	
	Turn-off Time	t_{off}		-	165	330	
Total Gate Charge (Gate-Source Plus Gate-Drain)		Q_g	$V_{DD} = 400V, V_{GS} = 10V,$ $I_D = -5A$	-	47	94	nC
Gate-Source Charge		Q_{gs}		-	19	-	
Gate-Drain ("Miller") Charge		Q_{gd}		-	28	-	

Source-Drain Diode Ratings and Characteristics (Ta = 25°C)

CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Continuous Drain Reverse Current	I_{DR}	-	-	-	5	A
Pulse Drain Reverse Current	I_{DRP}	-	-	-	15	A
Diode Forward Voltage	V_{DSF}	$I_{DR} = 5A, V_{GS} = 0V$	-	-	-1.9	V
Reverse Recovery Time	t_r	$I_{DR} = 5A, V_{GS} = 0V$	-	1450	-	ns
Reverse Recovered Charge	Q_r	$dI_{DR}/dt = 100A/\mu s$	-	20	-	μC

