


High Voltage Schottky Rectifiers

Reverse Voltage 90 to 100V
Forward Current 1.0A

DO-204AL (DO-41)

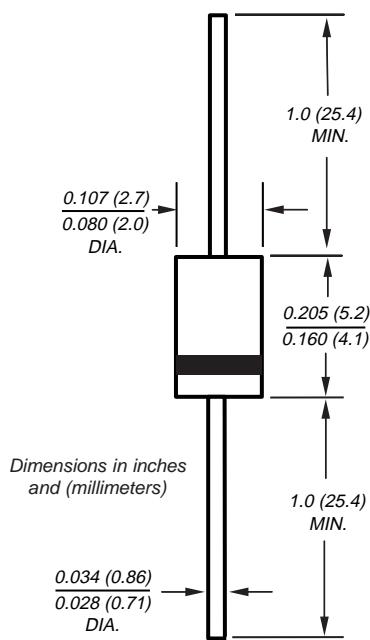

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free-wheeling, and polarity protection applications
- Guardring for overvoltage protection

Mechanical Data

Case: JEDEC DO-204AL molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed:
250°C/10 seconds at terminals

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.012oz., 0.34g

Packaging Codes-Options:

1-5K per Bulk box, 50K/carton

4-5.5K per 13" reel (52.4mm Tape), 22K/carton

23-3K per Ammo mag. (52.4mm Tape), 27K/carton

Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbols	SB1H90	SB1H100	Units
Maximum repetitive peak reverse voltage	V_{RRM}	90	100	V
Maximum RMS voltage	V_{RMS}	63	70	V
Maximum DC blocking voltage	V_{DC}	90	100	V
Maximum average forward rectified current	$I_{F(AV)}$	1.0		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50		A
Peak repetitive reverse surge current at $t_p = 2.0\mu\text{s}$, 1KHz	I_{RRM}	1.0		A
Maximum thermal resistance ⁽²⁾	$R_{\theta JA}$ $R_{\theta JL}$	57 15		°C/W
Maximum operating junction temperature	T_J	175		°C
Storage temperature range	T_{STG}	−55 to +175		°C

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Maximum instantaneous forward voltage at: ⁽¹⁾	$I_F = 1.0\text{A}, T_J = 25^\circ\text{C}$ $I_F = 1.0\text{A}, T_J = 125^\circ\text{C}$ $I_F = 2.0\text{A}, T_J = 25^\circ\text{C}$ $I_F = 2.0\text{A}, T_J = 125^\circ\text{C}$	V_F	0.77 0.62 0.86 0.70	V
Maximum DC reverse current at rated DC blocking voltage ⁽¹⁾	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	I_R	1.0 0.5	μA mA

Notes: (1) Pulse test: 300μs pulse width, 1% duty cycle

(2) P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

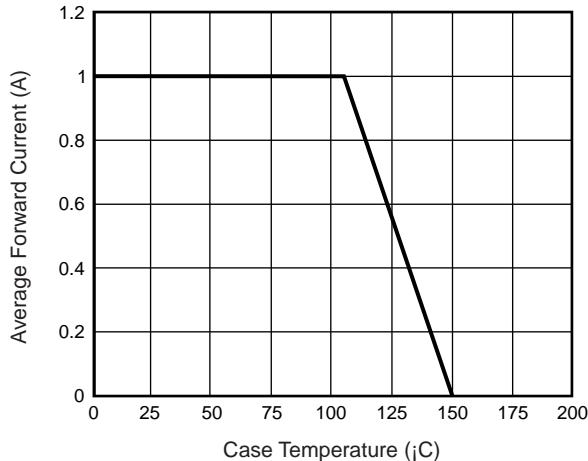


Fig. 2 – Typical Instantaneous Forward Characteristics

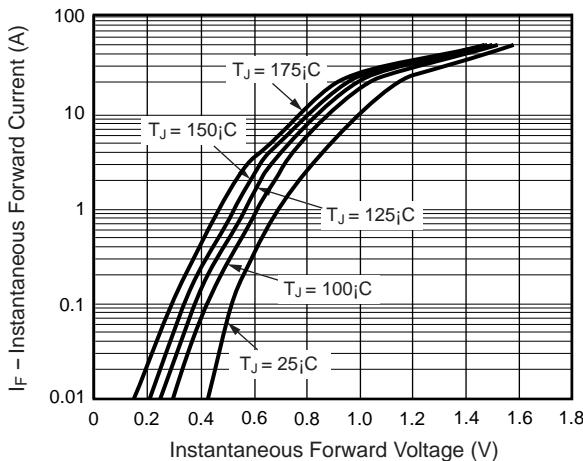


Fig. 3 – Typical Reverse Characteristics

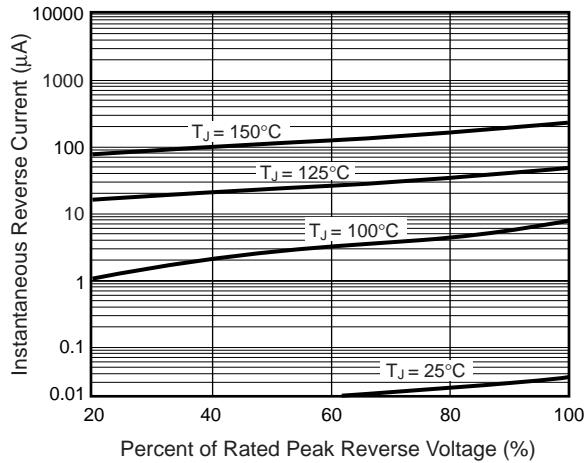


Fig. 4 – Typical Junction Capacitance

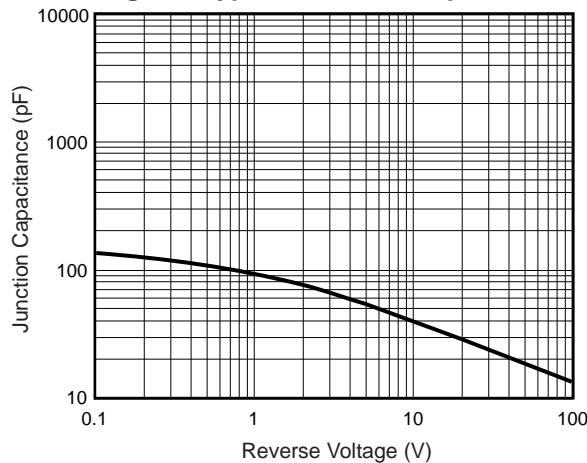


Fig. 5 – Typical Transient Thermal Impedance

