

**FEATURES**
**3-axis sensing**
**Small, low-profile package**

4 mm × 4 mm × 1.45 mm LFCSP

**Low power**

 200  $\mu$ A at  $V_s = 2.0$  V (typ)

**Single-supply operation**

2.0 V to 3.6 V

**10,000 g shock survival**
**Good zero g bias stability**
**Good sensitivity accuracy**
**BW adjustment with a single capacitor**
**RoHS/WEEE lead-free compliant**
**APPLICATIONS**
**Cost-sensitive motion- and tilt-sensing applications**

Cellular handsets

Gaming devices

Disk drive protection

Image stabilization

Sports and health devices

**GENERAL DESCRIPTION**

The ADXL330 is a small, low power complete three axis accelerometer with signal conditioned voltage outputs, all on a single monolithic IC. The product measures acceleration with a minimum full-scale range of  $\pm 2 g$ . It can measure the static acceleration of gravity in tilt-sensing applications, as well as dynamic acceleration resulting from motion, shock, or vibration.

The user selects the bandwidth of the accelerometer using capacitors  $C_x$ ,  $C_y$ ,  $C_z$  and at the  $X_{OUT}$ ,  $Y_{OUT}$ , and  $Z_{OUT}$  pins. Bandwidths may be selected to suit the application, with a range of 0.5 Hz to 1,600 Hz for X and Y axes, and a range of 0.5 Hz to 550 Hz for the Z axis.

The ADXL330 is available in a small, low-profile, 4 mm × 4 mm × 1.45 mm, 16-lead, plastic lead frame chip scale package (LFCSP).

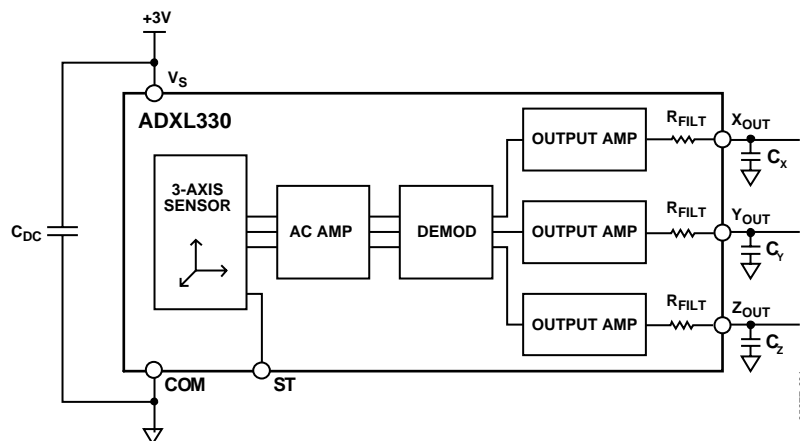
**FUNCTIONAL BLOCK DIAGRAM**


Figure 1.

**Rev. PrA**

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.

Tel: 781.329.4700

Fax: 781.461.3113

[www.analog.com](http://www.analog.com)

© 2005 Analog Devices, Inc. All rights reserved.

**TABLE OF CONTENTS**

|                                |   |  |   |
|--------------------------------|---|--|---|
| Features .....                 | 1 | Absolute Maximum Ratings .....                   | 4 |
| Applications.....              | 1 | ESD Caution.....                                 | 4 |
| General Description .....      | 1 | Pin Configuration and Function Descriptions..... | 5 |
| Functional Block Diagram ..... | 1 | Axes of Acceleration Sensitivity .....           | 6 |
| Revision History .....         | 2 | Outline Dimensions .....                         | 7 |
| Specifications.....            | 3 | Ordering Guide .....                             | 7 |

**REVISION HISTORY**

10/05—Revision PrA: Preliminary Version

## SPECIFICATIONS

$T_A = 25^\circ\text{C}$ ,  $V_S = 3\text{ V}$ ,  $C_X = C_Y = C_Z = 0.1\ \mu\text{F}$ , acceleration = 0 g, unless otherwise noted. All minimum and maximum specifications are guaranteed. Typical specifications are not guaranteed.

Table 1.

| Parameter  | Conditions         | Min     | Typ           | Max | Unit                               |
|--|--------------------|---------|---------------|-----|------------------------------------|
| <b>SENSOR INPUT</b>                                |                    |         |               |     |                                    |
| Measurement Range                                  | Each axis          | $\pm 2$ | $\pm 4$       |     | g                                  |
| Nonlinearity                                       | % of full scale    |         | $\pm 0.3$     |     | %                                  |
| Inter-Axis Alignment Error                         |                    |         | $\pm 0.1$     |     | Degrees                            |
| Cross Axis Sensitivity <sup>1</sup>                |                    |         | $\pm 1$       |     | %                                  |
| <b>SENSITIVITY (RATIOMETRIC)<sup>2</sup></b>       |                    |         |               |     |                                    |
| Sensitivity at $X_{OUT}$ , $Y_{OUT}$ , $Z_{OUT}$   | $V_S = 3\text{ V}$ | 270     | 300           | 330 | mV/g                               |
| Sensitivity Change Due to Temperature <sup>3</sup> | $V_S = 3\text{ V}$ |         | $\pm 0.01$    |     | %/°C                               |
| <b>ZERO g BIAS LEVEL (RATIOMETRIC)</b>             |                    |         |               |     |                                    |
| 0 g Voltage at $X_{OUT}$ , $Y_{OUT}$ , $Z_{OUT}$   | $V_S = 3\text{ V}$ | 1.2     | 1.5           | 1.8 | V                                  |
| 0 g Offset vs. Temperature                         |                    |         | $\pm 1$       |     | mg/°C                              |
| <b>NOISE PERFORMANCE</b>                           |                    |         |               |     |                                    |
| Noise Density $X_{OUT}$ , $Y_{OUT}$                |                    |         | 170           |     | $\mu\text{g}/\sqrt{\text{Hz}}$ rms |
| Noise Density $Z_{OUT}$                            |                    |         | 350           |     | $\mu\text{g}/\sqrt{\text{Hz}}$ rms |
| <b>FREQUENCY RESPONSE<sup>4</sup></b>              |                    |         |               |     |                                    |
| Bandwidth $X_{OUT}$ , $Y_{OUT}$ <sup>5</sup>       | No external filter |         | 1600          |     | Hz                                 |
| Bandwidth $Z_{OUT}$                                | No external filter |         | 550           |     | Hz                                 |
| $R_{FILT}$ Tolerance                               |                    |         | $32 \pm 15\%$ |     | k $\Omega$                         |
| Sensor Resonant Frequency                          |                    |         | 5.5           |     | kHz                                |
| <b>SELF-TEST<sup>6</sup></b>                       |                    |         |               |     |                                    |
| Logic Input Low                                    |                    |         | +0.6          |     | V                                  |
| Logic Input High                                   |                    |         | +2.4          |     | V                                  |
| Output Change at $X_{OUT}$                         | Self-test 0 to 1   |         | -130          |     | mV                                 |
| Output Change at $Y_{OUT}$                         | Self-test 0 to 1   |         | +130          |     | mV                                 |
| Output Change at $Z_{OUT}$                         | Self-test 0 to 1   |         | -70           |     | mV                                 |
| <b>OUTPUT AMPLIFIER</b>                            |                    |         |               |     |                                    |
| Output Swing Low                                   | No load            |         | 0.1           |     | V                                  |
| Output Swing High                                  | No load            |         | 2.8           |     | V                                  |
| <b>POWER SUPPLY</b>                                |                    |         |               |     |                                    |
| Operating Voltage Range                            |                    | 2.0     |               | 3.6 | V                                  |
| Quiescent Supply Current                           |                    |         | 320           |     | $\mu\text{A}$                      |
| Turn-On Time <sup>7</sup>                          | No external filter |         | 1             |     | ms                                 |
| <b>TEMPERATURE</b>                                 |                    |         |               |     |                                    |
| Operating Temperature Range                        |                    | -25     |               | 70  | °C                                 |

<sup>1</sup> Defined as coupling between any two axes.

<sup>2</sup> Sensitivity is essentially ratiometric to  $V_S$ . For  $V_S = 2.7\text{ V}$  to  $3.3\text{ V}$ , sensitivity is TBD mV/V/g to TBD mV/V/g typical.

<sup>3</sup> Defined as the output change from ambient-to-maximum temperature or ambient-to-minimum temperature.

<sup>4</sup> Actual frequency response controlled by user-supplied external filter capacitors ( $C_X$ ,  $C_Y$ ,  $C_Z$ ).

<sup>5</sup> Bandwidth with external capacitors =  $1/(2 \times \pi \times 32\text{ k}\Omega \times C)$ . For  $C_X$ ,  $C_Y$ ,  $C_Z = 0.003\ \mu\text{F}$ , bandwidth = 1.6 kHz. For  $C_X$ ,  $C_Y$ ,  $C_Z = 10\ \mu\text{F}$ , bandwidth = 0.5 Hz.

<sup>6</sup> Self-test response changes cubically with  $V_S$ .

<sup>7</sup> Turn-on time is dependent on  $C_X$ ,  $C_Y$ ,  $C_Z$  and is approximately  $160 \times C_X$  or  $C_Y$  or  $C_Z + 1\text{ ms}$ , where  $C_X$ ,  $C_Y$ ,  $C_Z$  are in  $\mu\text{F}$ .

## ABSOLUTE MAXIMUM RATINGS

Table 2.

| Parameter  | Rating                            |
|--|-----------------------------------|
| Acceleration (Any Axis, Unpowered)                   | 10,000 <i>g</i>                   |
| Acceleration (Any Axis, Powered)                     | 10,000 <i>g</i>                   |
| $V_s$  | -0.3 V to +7.0 V                  |
| All Other Pins                                       | (COM - 0.3 V) to ( $V_s$ + 0.3 V) |
| Output Short-Circuit Duration<br>(Any Pin to Common) | Indefinite                        |
| Temperature Range (Powered)                          | -55°C to +125°C                   |
| Temperature Range (Storage)                          | -65°C to +150°C                   |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



### PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

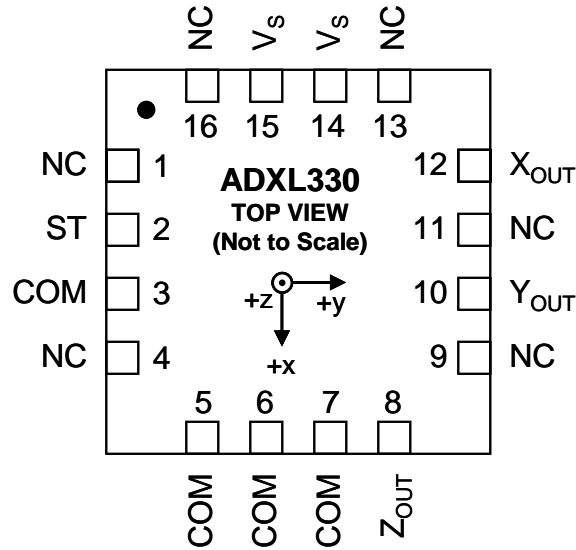


Figure 2. Pin Configuration

Table 3. Pin Function Descriptions

| Pin No. | Mnemonic         | Description                     |
|---------|------------------|---------------------------------|
| 1       | NC               | No Connect                      |
| 2       | ST               | Self-Test                       |
| 3       | COM              | Common                          |
| 4       | NC               | No Connect                      |
| 5       | COM              | Common                          |
| 6       | COM              | Common                          |
| 7       | COM              | Common                          |
| 8       | Z <sub>OUT</sub> | Z Channel Output                |
| 9       | NC               | No Connect                      |
| 10      | Y <sub>OUT</sub> | Y Channel Output                |
| 11      | NC               | No Connect                      |
| 12      | X <sub>OUT</sub> | X Channel Output                |
| 13      | NC               | No Connect                      |
| 14      | V <sub>S</sub>   | Supply Voltage (2.0 V to 3.6 V) |
| 15      | V <sub>S</sub>   | Supply Voltage (2.0 V to 3.6 V) |
| 16      | NC               | No Connect                      |

AXES OF ACCELERATION SENSITIVITY

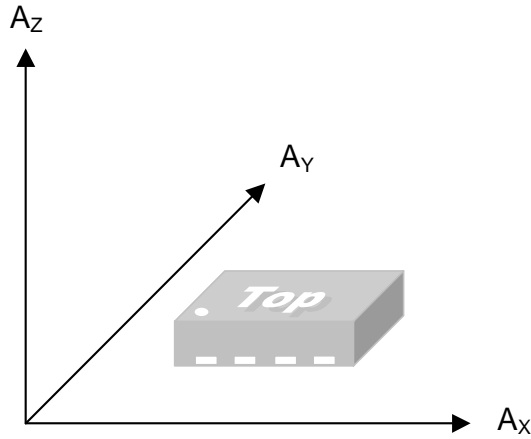


Figure 3. Axes of Acceleration Sensitivity  
(Corresponding Output Voltage Increases When Accelerated Along the Sensitive Axis)

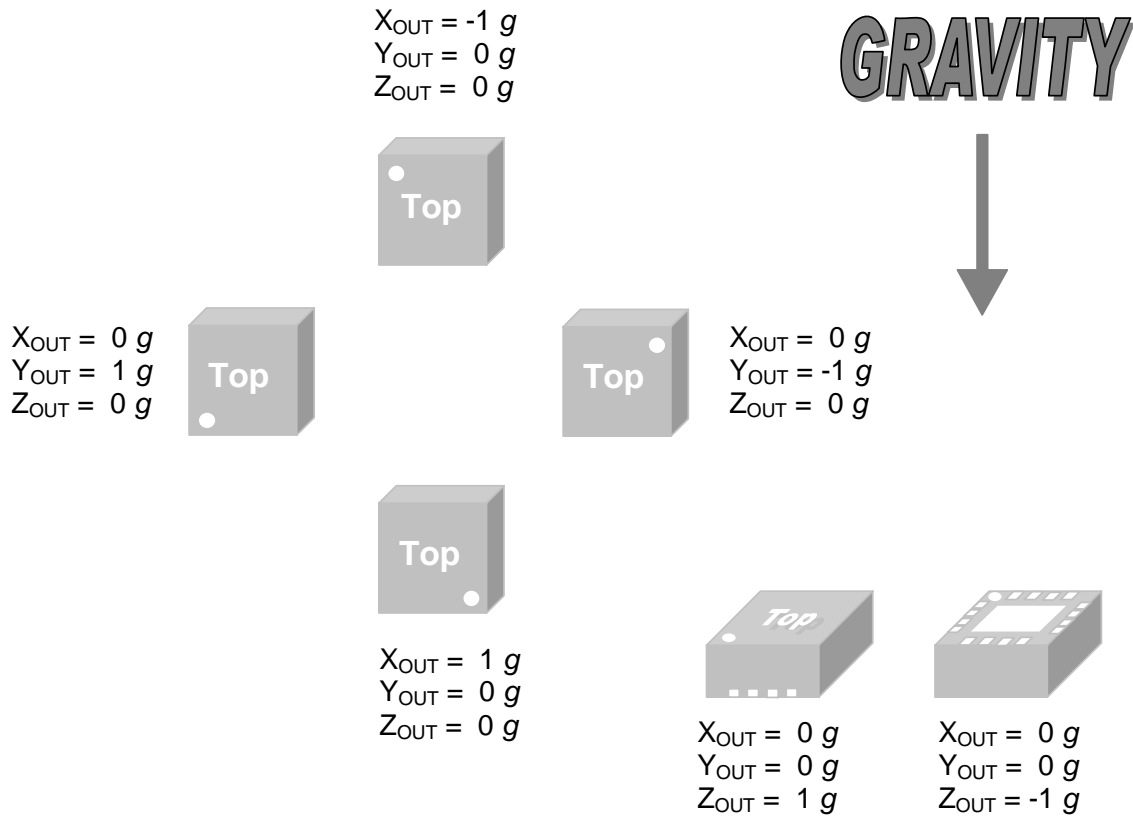


Figure 4. Output Response vs. Orientation to Gravity

### OUTLINE DIMENSIONS

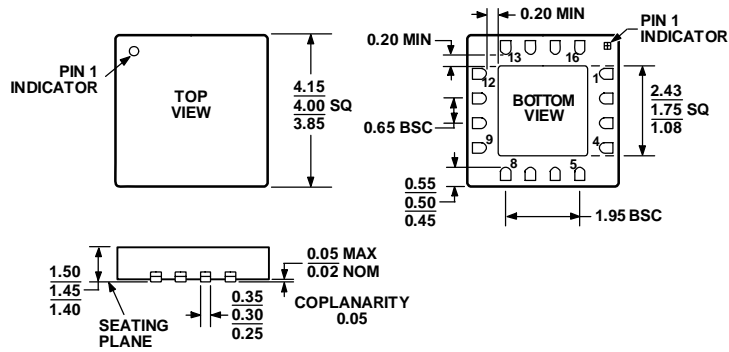


Figure 5. 16-Lead Lead Frame Chip Scale Package [LFCSP]  
 4 mm x 4 mm Body  
 (CP-16-5)  
 Dimensions shown in millimeters  
 (Drawing Not to Scale)

### ORDERING GUIDE

| Model                    | Measurement Range | Specified Voltage (V) | Temperature Range | Package Description | Package Option |
|--------------------------|-------------------|-----------------------|-------------------|---------------------|----------------|
| ADXL330KCPZ <sup>1</sup> | ±2 g              | 3                     | -25°C to +70°C    | 16-Lead LFCSP       | CP-16-5        |
| ADXL330KCPZ-RL           | ±2 g              | 3                     | -25°C to +70°C    | 16-Lead LFCSP       | CP-16-5        |
| EVAL-ADXL330             |                   |                       |                   | Evaluation Board    |                |

<sup>1</sup> Lead finish—matte tin.

**NOTES**