


FILAMENT REPLACEMENT LEDs - MULTI-LED CLUSTER



- Direct replacement for BA15d
- Bi-Polar
- Internal potting for increased reliability
- Ideal for high vibration applications

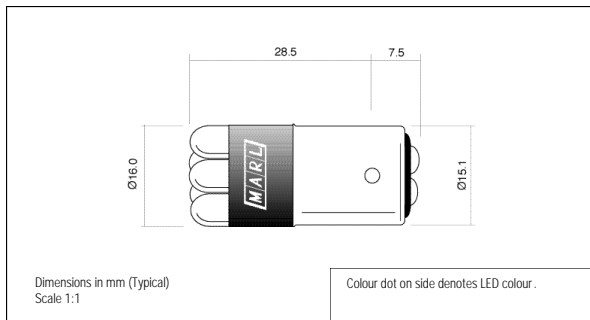

225 SERIES

MLQ = 20




Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to a single unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vopr	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
HIGH INTENSITY									
225-501-21	Red	Water Clear	12	40	2750	660	Narrow	-40 ~ +80	-40 ~ +80
225-521-21	Yellow		12	40	4500	590			
225-532-21	Green		12	40	6000	525			
225-930-21	Blue		12	40	2000	470			
225-997-21	White		12	40	3000	•			
225-501-22	Red		24	20	2750	660			
225-521-22	Yellow		24	20	4500	590			
225-532-22	Green		24	20	6000	525			
225-930-22	Blue		24	20	2000	470			
225-997-22	White		24	20	3000	•			
225-501-23	Red		28	19	2750	660			
225-521-23	Yellow		28	20	4500	590			
225-532-23	Green		28	17	6000	525			
225-930-23	Blue		28	17	2000	470			
225-997-23	White		28	17	3000	•			
UNITS				Vdc	mA	mcd			

• = Typical emission colour: x=0.31, y=0.32. Colour temperature 8000K.
 Intensities (Iv) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.



SAMPLES AVAILABLE