

RF AMPLIFIER

MODEL *TM7104*

Available as: TM7104, 4 Pin TO-8 (T4)
 TN7104, 4 Pin Surface Mount (SM3)
 FP7104, 4 Pin Flatpack (FP4)
 BX7104, Connectorized Housing (H1)

Features

- High Gain: 24 dB Typical
- Low Noise Figure: 1.9 dB Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +37 (Typ.)
 Second Order Two Tone Intercept Point +31 (Typ.)
 Third Order Two Tone Intercept Point +25 (Typ.)

Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 150 MHz	5 - 150 MHz
Gain (dB)	24	22.5 Min.
Power @ 1 dB Comp. (dBm)	+12	+10.5 Min.
Reverse Isolation (dB)	- 27	- 26 Max.
VSWR In	<1.75:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise figure (dB)	1.9	2.5 Max.
Power Vdc	+5	+5
mA	20	23 Max.

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 10 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Note: Care should always be taken to effectively ground the case of each unit.

Typical Performance Data

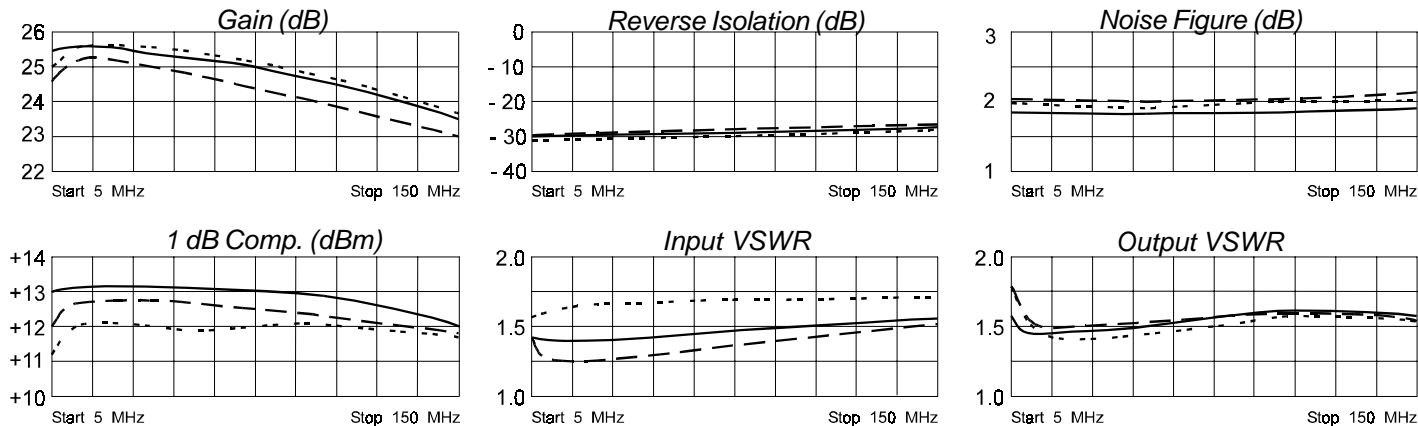

Legend ——— + 25 °C - - - + 85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.20	-146	18.83	-173	.03	9	.24	169
10	.19	-162	19.10	179	.03	5	.21	171
20	.20	-170	19.08	170	.03	1	.20	174
50	.21	-174	18.44	149	.03	- 2	.20	173
100	.24	-180	16.68	118	.04	- 6	.22	161
150	.27	-172	14.75	91	.04	-12	.21	137
200	.30	-160	12.98	65	.04	-23	.19	101



2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 ···· FAX 215-464-4001 3/17/03