

RF AMPLIFIER

MODEL TM7101

Available as: TM7101, 4 Pin TO-8 (T4)
TN7101, 4 Pin Surface Mount (SM3)
FP7101, 4 Pin Flatpack (FP4)
BX7101, Connectorized Housing (H1)

Features

- Low Noise Figure: 1.8 dB Typical
 - High Gain: 27.5 dB Typical
 - Operating Temp. - 55 °C to +85 °C
 - Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C	
Frequency	10 - 150 MHz	10 - 150 MHz	
Gain (dB)	27.5	26.0 Min.	
Power @ 1 dB Comp. (dBm)	+16.5	+15.0	Min.
Reverse Isolation (dB)	- 31.5	- 30	Max.
VSWR	In	<1.5:1	2.0:1 Max.
	Out	<1.25:1	2.0:1 Max.
Noise figure (dB)	1.8	2.5	Max.
Power	Vdc mA	+15 20	+15 23 Max.

Note: Care should always be taken to effectively ground the case of each unit.







Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +41 (Typ.)
 Second Order Two Tone Intercept Point +35 (Typ.)
 Third Order Two Tone Intercept Point +30 (Typ.)

Maximum Ratings

Ambient Operating Temperature	-55°C to + 100 °C
Storage Temperature	-62°C to + 125 °C
Case Temperature	+ 125 °C
DC Voltage	+ 18 Volts
Continuous RF Input Power	+ 13 dBm
Short Term RF Input Power	50 Milliwatts(1 Minute Max.)
Maximum Peak Power	0.5 Watt (3 μ sec Max.)

Typical Performance Data

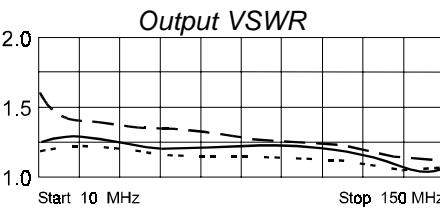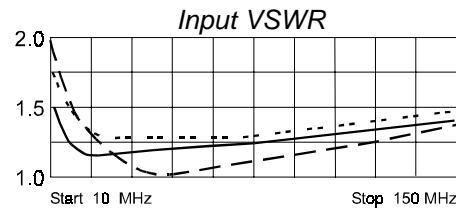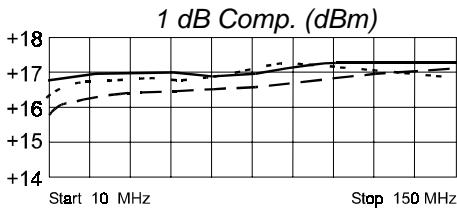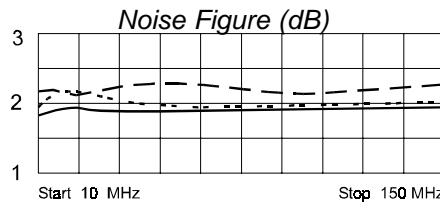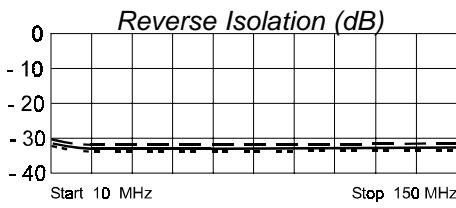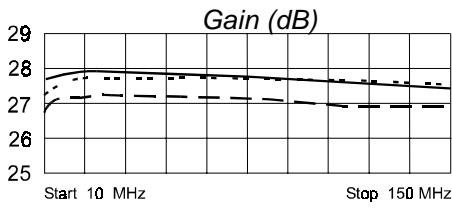

Linear S-Parameters

FREQ. MHz	S11---		S21---		S12---		S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
.5	.23	- .99	24.64	-165	.02	- 4	.11	-161
25	.09	-145	25.10	175	.02	1	.13	171
50	.07	151	24.87	158	.02	- 1	.12	153
75	.09	109	24.87	144	.02	1	.11	133
100	.12	81	24.39	130	.02	- 2	.08	124
125	.14	64	24.14	117	.02	- 10	.05	105
150	.16	53	23.80	105	.03	- 10	.02	87
200	.20	26	23.32	79	.03	- 15	.04	-132
300	.24	- 32	23.14	27	.02	- 47	.13	-169

Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 • • • FAX 215-464-4001