

RF AMPLIFIER

MODEL *TM7272*

Available as: TM7272, 4 Pin TO-8 (T4)
 TN7272, 4 Pin Surface Mount (SM3)
 FP7272, 4 Pin Flatpack (FP4)
 BX7272, Connectorized Housing (H1)

Features

- Gain: 14.7 dB Typical
- Low VSWR: 1.25:1 Maximum
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 250 MHz	10 - 200 MHz
Gain (dB)	14.7	14 Min/ 15.5 Max
Power @ 1 dB Comp. (dBm)	+14	+12.0 Min.
Reverse Isolation (dB)	- 18.5	- 18 Max.
VSWR In	<1.15:1	1.25:1 Max.
VSWR Out	<1.15:1	1.25:1 Max.
Noise figure (dB)	3.0	5.0 Max.
Power Vdc	+5	+5
mA	35	38 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +46 (Typ.)
 Second Order Two Tone Intercept Point +41 (Typ.)
 Third Order Two Tone Intercept Point +29 (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 10 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Typical Performance Data

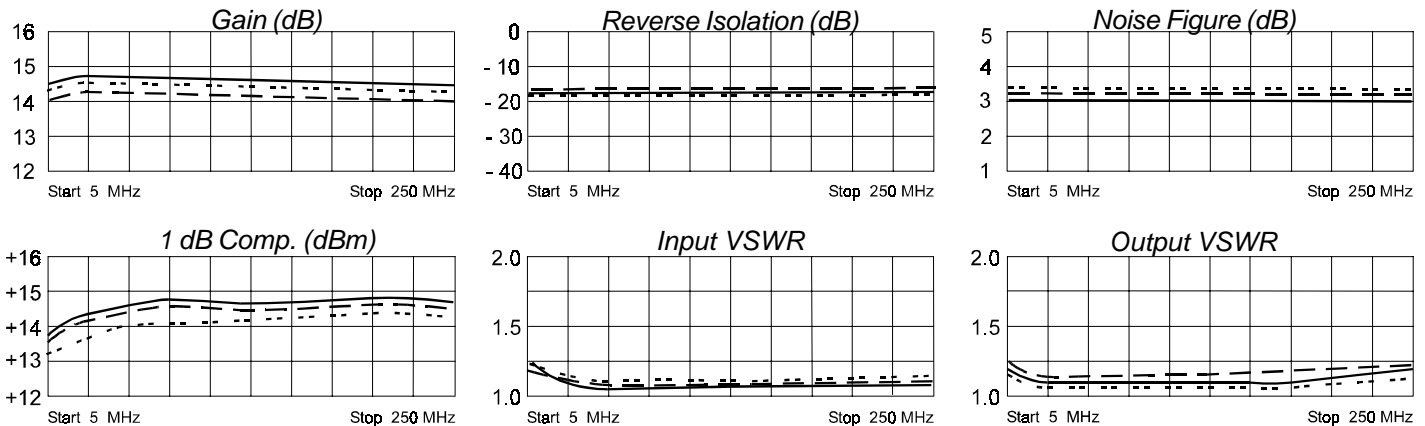

Legend ——— + 25 °C - - - + 85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	---S11---		---S21---		---S12---		---S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.09	- 92	5.34	-172	.11	10	.10	126
50	.02	179	5.49	173	.12	2	.02	-176
100	.02	128	5.44	163	.12	- 0	.03	-140
150	.03	108	5.44	145	.12	- 1	.04	-131
200	.03	96	5.42	147	.11	- 1	.05	-133
250	.04	71	5.42	138	.12	- 1	.07	-137



2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 ···· FAX 215-464-4001 3/18/03