

**NOTES:**

**1. ELECTRICAL:**

- 1.1 CONTACT CAPACITY .25 A @ 60 VAC., 3 VA MAXIMUM.
- 1.2 CONTACT RESISTANCE 30 OHM MAX.

**2. OPERATE:**

- 2.1 MAXIMUM DIFFERENTIAL ANGLE 15 DEG.
- 2.2 OPERATE TEMPERATURE RANGE -20 DEG. F. TO 175 DEG. F.

**3. HOUSING MATERIAL ABS COLOR BLUE.**

**4. LEADS 10" LONG PVC INSULATION**




- 2 CONDUCTOR WITH OUTER JACKET.

**5. MOUNTING HOLES WILL ACCEPT SCREWS**

- UP TO .125 (3.17) DIA.

**6. ALL DIMENSIONS IN INCHES AND (mm).**

REV.	DATE	REVISION RECORD	DR.
A	05/15 2000	ORIGINAL	S.H.

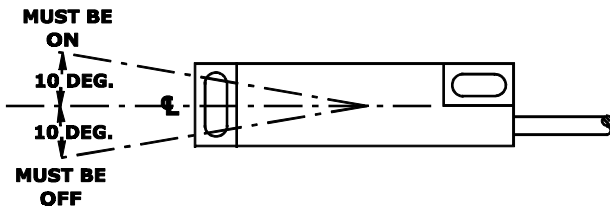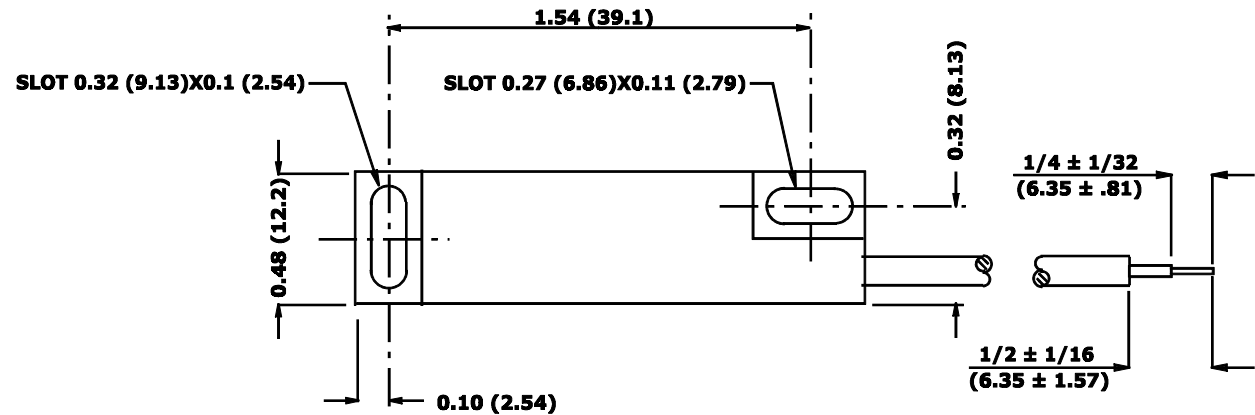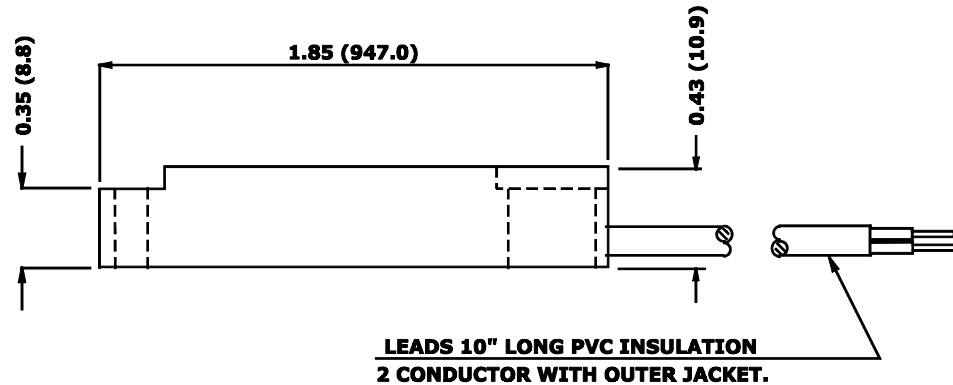

<b>COMUS INTERNATIONAL</b>			
454 ALLWOOD RD. CLIFTON, NJ 07012 U.S.A. PH. (973) 777 - 6900			
<b>TOLERANCES</b> (except as noted)	REF.:	SCALE: NONE	DRAWN BY: S.H.
DECIMAL ± .01 (.254) 2 Digit ± .005 (.127) 3 Digit	FRACTIONAL ± 1/64 (.397)	APPROVED: DATE:	
ANGULAR ± 1/2 °	TITLE: <b>ENCAPSULATED NON - MERCURY TILT SWITCH</b>		
DATE: 05/15/00		DRAWING NUMBER: <b>CW1300-90</b>	